

POWER

Data Sheet

DS460SDC-3

460 Watts

Total Output Power: 460 Watts
+12 Vdc Standby Output

**Wide Range
Input Voltage:** 40 - 72 Vdc

SPECIAL FEATURES

- Active power factor correction
- 1U X 2U form factor
- +12 Vdc output
- +12 Vdc standby
- Hot plug operation
- N + 1 redundant
- Active current sharing
- Built-in cooling fan
- I²C communication interface bus
- PMBus compliant
- EEPROM for FRU data
- Two year warranty

SAFETY

- UL/cUL 60950 (UL Recognized)
- NEMKO 60950
- Cb Certificate and report
- CE Mark (EMC)



Electrical Specifications

Input

Input range	40 - 72 Vdc
Frequency	DC
Inrush current	50 A maximum inrush current
Efficiency	90% typical at full load, nominal line
Conducted EMI	FCC Subpart J EN55022 Class B
Radiated EMI	FCC Subpart J EN55022 Class B
Leakage current	0.15 mA
Hold up time	1 ms minimum

Output

Main DC voltage	+12.3 V @ 36.0 A
Standby	+12 V @ 2.3 A
Adjustment range	Factory Set
Regulation	±5%
Overcurrent	+12 Vdc Trip point 120% - 150% of rated current
Overvoltage	+12 Vdc; 13.2 - 14.4 Vdc +12 Vsb; 13.6 - 15.0 Vdc
Turn-on delay	< 2 seconds
Main output rise time	< 50 mS, monotonic rise

Logic Control

PS_PRESENT (S4)	Used to sense the number of power supplies in the system (operational or not) and provide hot plug insertion and removal functionality by controlling main outputs during hot plug insertion and removal by employing following circuitry. When the unit is removed from the system the fast shut down signal quickly turns OFF main outputs and discharges output capacitors. This signal is the shortest gold finger pin on the signal connector to allow for last make, first break configuration.
PSOK (S6)	Combined indicator of DC input and main 12 V DC output. This is a three level signal to indicate different stages as follows: DC not OK and DC not OK – Signal status shall be LOW (< 0.6 V) DC OK and DC not OK – Signal status shall be LOW (< 0.6 V) DC OK and DC OK – Signal status shall be HIGH (> 3.0 V) DC not OK and DC OK – Signal status shall be Middle Level (Between 2 V and 2.5 V) DC OK threshold is defined as when the 12 V output is greater than 11.5 V DC not OK threshold is defined as when the 12 V output is less than 11.4 V & greater than 11.3 V
I-Mon (S7)	Provides both the load sharing function (as a feedback for output regulation droop function) and 12 V output current information.
PS INTERRUPT (S4)	The signal behavior in response to certain operating condition changes in the power supply as defined in the Firmware Specification section. This signal shall be pulled up to maximum 5 V logic level external to the PS.
PS ON (S8)	Required to remotely turn on/off the power supply. PSON# is an active low signal that turns on the main 12 V DC output. When this signal is not pulled low by the system, or left open, the 12 V output is turned off. This signal is pulled to a standby voltage by a pull-up resistor internal to the power supply. Refer to On/Off Timing for timing diagram in TRN. When in off or standby condition, the main 12 V DC output will be less than 50 mV with respect to output return.
LED INDICATOR	GREEN = DC input present, 12 V output & 12 V standby in regulation OFF = Overvoltage, overcurrent, overtemperature, undervoltage protection triggered.

Environmental Specifications




Operating temperature	-10 °C to 50 °C
Storage temperature	-40 °C to +85 °C
Altitude, operating	10,000 ft.
Electromagnetic susceptibility/Input transients	EN61000-4-2, 4-3, 4-4, -4-5, 4-6, 4-11
RoHS & lead-free compliant	No tantalum caps
Humidity	5 to 90% RH, non-condensing
Shock and vibration specifications	Complies with Astec Std. Specifications, Q3205
MTBF (Demonstrated)	500K Hrs at full load, 50 °C

Ordering Information

Model Number	Nominal Output Voltage Set Point	Set Point Tolerance	Total Regulation	Minimum Current	Maximum Current	Output Ripple P/P	Over Current	Stand-by	Air Flow
DS460SDC-3	12.3 Vdc	± 0.2%	± 5%	1 A	36.0 A	120 mV	150%	12.0 V @ 2.3 A	STD
DS460SDC-3-001	12.3 Vdc	± 0.2%	± 5%	1 A	36.0 A	120 mV	150%	12.0 V @ 2.3 A	REV

*Overcurrent latches off if overcurrent lasts over 1 second, otherwise it is auto recovery.


Mechanical Drawings

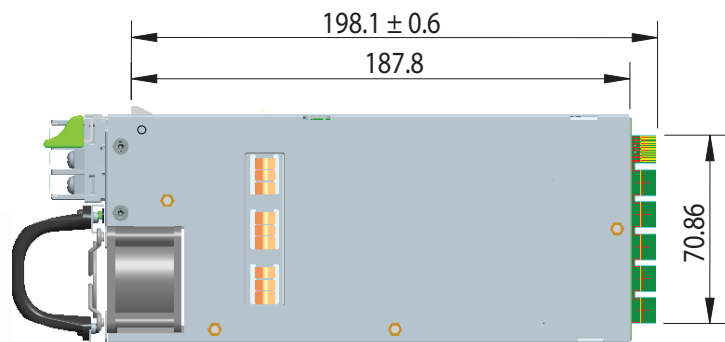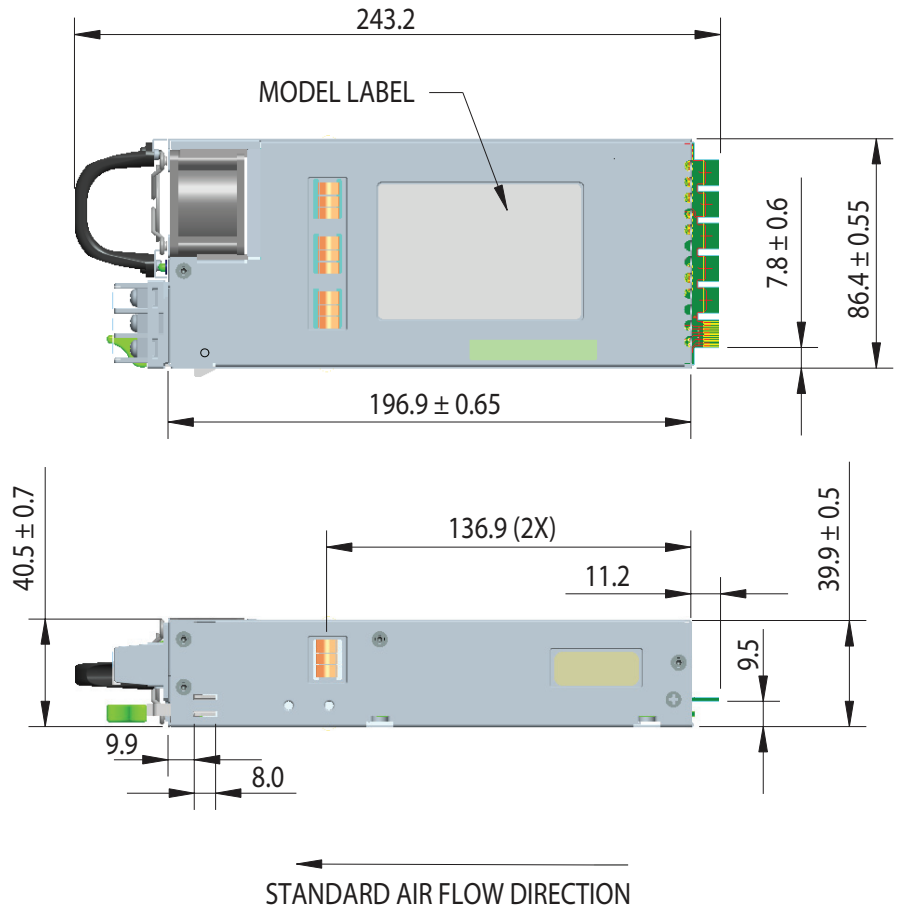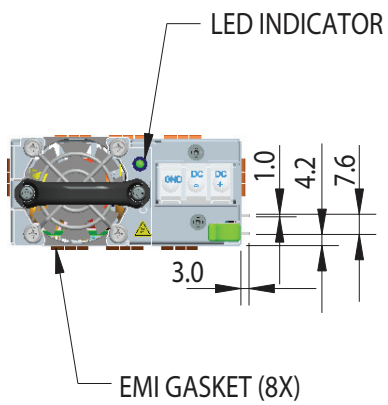

Connector Definitions


DC Input Connector

Pin 1	DC+
Pin 2	DC-
Pin 3	Earth Ground

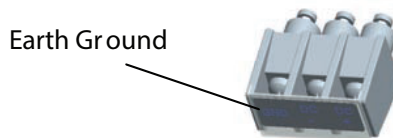


Output Connector - Power Blades

PB1	V _o
PB2	V _o
PB3	V _o
PB4	RTN
PB5	RTN
PB6	RTN
PB7	RTN
PB8	RTN
PB9	V _o
PB10	V _o

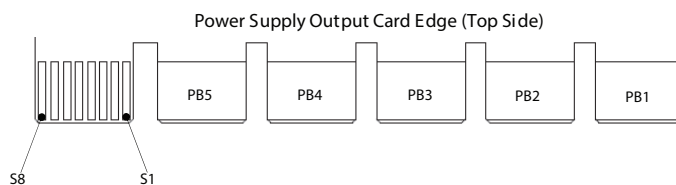

Output Connector - Signal Blades

S1	VSB
S2	VSB
S3	Reserved
S4	PS INTERRUPT
S5	PS PRESENT
S6	PSOK
S7	I-MON
S8	PSON#
S9	SCL
S10	SDA
S11	GND
S12	ADD0
S13	ADD1
S14	ADD2
S15	RTN
S16	RTN

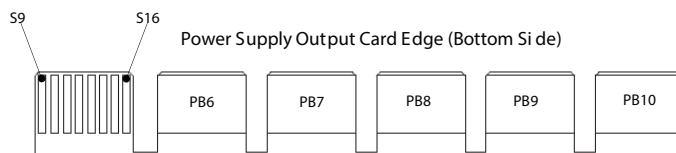

Power/Signal Mating Connectors and Pin Types

Reference	On Power Supply	Mating Connector or Equivalent
DC Input Connector	Terminal block	Wire AWG #16 - #12
Output Connector	PCB card edge (0.062")	Molex 459840007 (top mount)
		Molex 459841122 (bottom mount)

WORLDWIDE OFFICES

Americas

2900 South Diablo Way
Suite B100
Tempe, AZ 85282, USA
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barberr House
4 Harbour Buildings, Waterfront West
Brierley Hill, West Midlands
DY5 1LN, UK
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
An Advanced Energy Company

www.artesyn.com

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit www.artesyn.com/legal.

For more information: www.artesyn.com
For support: productsupport.ep@artesyn.com

DS460S-DS 19Nov2019

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rack Mount Power Supplies](#) *category:*

Click to view products by [Artesyn Embedded Technologies](#) *manufacturer:*

Other Similar products are found below :

[HFE2500BP](#) [PET1300-12-054NAE](#) [HFE1600BP](#) [73-311-0001](#) [73-317-0148](#) [73-495-0233](#) [750-1016](#) [SFP450-S101G](#) [FUP550SNRPS](#)
[VRA.00335.0](#) [VRA.00334.0](#) [VRA.00333.0](#) [HFE1600-KIT](#) [CC109146503](#) [RKP-1UI](#) [PFE1100-12-054ND](#) [FND300-1012G](#) [73-951-0001T](#)
[73-954-0001C](#) [DS550DC-3](#) [RCP-2000-24](#) [TSR10](#) [TET2000-12-086NA](#) [PET2000-12-074RA](#) [RCP-MU](#) [605-10144-2AC](#) [6609006-5](#)
[D1U54P-W-1200-12-HC4PC](#) [DS450DC-3](#) [DS650DC-3](#) [HPR12K-00-001](#) [LCM300Q-T](#) [LCM300W-T-4](#) [LCM600N-T-4-A](#) [FNP600-48G](#)
[FNR-3-48G](#) [FNR-5-12G](#) [PFS1200-12-054RAH](#) [PFS1200-12-054RD](#) [SPSPFE3-05G](#) [TET3200-12-069RA](#) [IEC-A-1](#) [FXX1600PCRPS](#) [915606](#)
[DHP-1UT-A](#) [DRP-3200-24](#) [RCP-1000-12](#) [RCP-1000-12-C](#) [RCP-1000-24](#) [RCP-1000-24-C](#) [RCP-1000-48](#)