
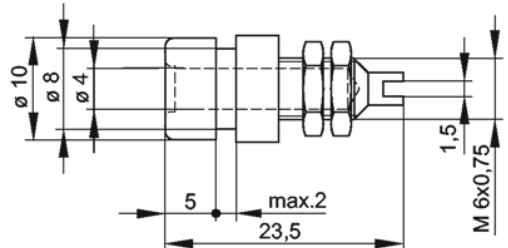


datasheet for BIL 20 Au
 article number: 930176701



product description:	order number: 930 176-701
description:	Socket with insulated head and ring for installation in equipment chassis and switchpanels with a wall thickness up to 2 mm. 4 mm diameter gold-plated brass socket, with solder connection.
typ:	BIL 20 rot/red Au
system:	4 mm system
order number:	930 176-701
color	
other color versions:	
technical data	
type of contact:	spring loaded socket
type of termination:	solder
rated voltage:	DC 60 V
rated current:	32 A
contact resistance:	3,5 mOhm
mounting:	screw
material	
contact material:	brass
contact surface material:	gold- plated
housing material:	PF
connecting nut material:	AuCo0,2
environmental conditions:	
temperature range:	-25 °C to +85 °C
inflammable class:	
housing:	94 V-0
drawing	
	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [hirschmann](#) manufacturer:

Other Similar products are found below :

[931298001 GSP 211 PG11](#) [934828001 BRSCIS 4D/9](#) [AK2B2540I SW](#) [BSB20KRT](#) [BUELA300KGE](#) [BUELA300KSW](#) [BUELA30KBL](#)
[BUELA30KGE](#) [930011200 MAB 6](#) [AK2BSW](#) [G 30 KW 3 M](#) [BNC-AL0.64](#) [BUELA300KBL](#) [BUELA300KRT](#) [BUELA30KGN](#)
[BUELA30KRT](#) [BUELA30KSW](#) [934066788](#) [934061103](#) [934059104](#) [972425002](#) [943301-001](#) [934061704](#) [STAK2](#) [AK2B2540I GN](#)
[PRUEF1SW](#) [SPIDER-PL-20-05T1999999TZ9HHHH](#) [BAT867-RUSW99AU999AT199L999ZHX](#) [930136106](#) [930317804](#) [934066105](#)
[934072100](#) [934076103](#) [934086104](#) [934086188](#) [973929000](#) [934157101](#) [930014517 MAS 30](#) [934077106](#) [934064104](#) [932794001](#) [GECKO](#)
[4TX](#) [972309101](#) [934100707](#) [975695700](#) [975455709](#) [975455701](#) [973528101](#) [MESAP 43650](#) [KLEPS1600SW](#)