


EM1611S

Embedded MicroBox for 3.5" Capa Board

Features

- Designed for 3.5" Capa board
- Full I/O function
- Slim compact design with one system cooling
- One 2.5" HDD drive bay
- 4 COM ports outlet
- Quick customization project supported

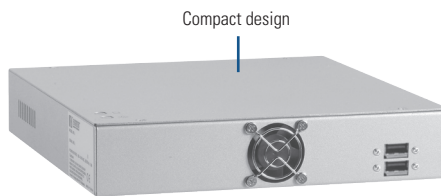

▲ Front view



▲ Rear view

Specifications

Standard Color	Silver
Construction	Heavy-duty cold-rolled steel
Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Front Panel I/O	2 x USB 2.0
Rear Panel I/O	1 x AT power button 4 x 9-pin D-sub connector 1 x VGA 1 x PS/2 keyboard/mouse through Y-type cable 1 x USB 2.0 1 x LPT
Expansion Interface	N/A
Drive Capacity	1 x 2.5" HDD 1 x CompactFlash™
Cooling	1 x 40 x 40 x 20 mm system fan
Power Supply	AT 72 W Input: AC 90 ~ 260V Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A AT 72 W Input: DC 9 ~ 18V Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A AT 72 W Input: DC 18 ~ 36V Output: +5V @ 10A, +12V @ 1.5A, -12V @ 0.3A
Dimensions	225 mm (8.86") (W) x 225 mm (8.86") (D) x 51 mm (2.0") (H)
Environment	EMI pre-scan meets EN 55022 Class A

Applications

Wallmount PC controller
Embedded PC controller
Unattended controller
Compact industrial PC

Packing List



- 1 x AC power cord (for AC version)
- 1 x Wall mount bracket

Ordering Information

Standard	
EM1611S	Embedded MicroBox for 3.5" embedded board
Option main board	
3.5" CAPA Boards	
Optional	
72W AC AT power supply	
72W DC AT power supply	

*Specifications and certifications are based on options and may vary.

Dimensions

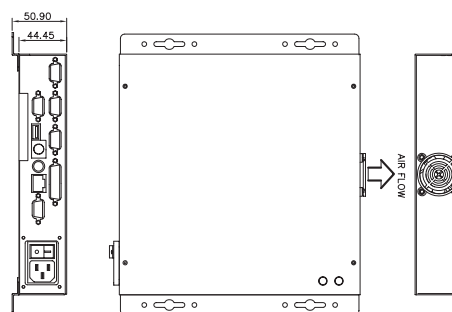

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modules Accessories](#) category:

Click to view products by [Axiomtek](#) manufacturer:

Other Similar products are found below :

[7010-0001](#) [AX98219](#) [A1UL8RISER](#) [F1UJPMICRISER](#) [FHW1U16RISER](#) [20-101-0440](#) [MBCDROM](#) [AX61221TM](#) [VM-105](#) [EA](#)
[CARREDIPTFT02](#) [RK-210E-B](#) [E226171106](#) [88606200030E](#) [SI-HDMI-EDID-EM](#) [MIC-75M13-00A1E](#) [FPM-1000T-SMKE](#) [AMK-R004E](#)
[96FMCF-ST2ADAPTER1](#) [AHWKPTP12GBGB](#) [AXXSTCPUCAR](#) [FPK-07-R10](#) [Mini Din 6P to 6P HARNESS](#) [FPF1320 POWER](#)
[MULTIPLEXER CARRIER](#) [881261510A0E](#) [AXXP3SWX08080](#) [conga-B7XD/CSP-Cu-B](#) [881281021A0E](#) [HFT for mounting KIT](#)
[FN928X_FN929X](#) [BB-MH112-1A](#) [15100600](#) [9-5000-1116](#) [BKCMCR1ABB](#) [70763](#) [98R3612003E](#) [881261910A0E](#) [106897](#) [48222R](#)
[BREAK OUT BOARD 20](#) [4D ARDUINO ADAPTOR SHIELD II](#) [20926110901](#) [PYCASE GREEN](#) [PYCASE BLUE](#) [FP15072_ZORYA-SC-](#)
[HEKLA](#) [20952000004](#) [20953000007](#) [DP-DVI-R10](#) [575-BBIS](#) [RACK-220GW/A130B](#) [492-BBKM](#) [IP411](#)