

High Speed USB Serial Adapters

Standard serial ports via USB 2.0 without replacing peripheral hardware or application software



Connect serial peripherals with USB 2.0 Serial Adapters

You can now broaden the range of external peripherals used on your computer at higher speed rates than the USB 1.1 series, with the introduction of the High Speed USB 2.0 Serial Adapters. The USB 2.0 has more bandwidth that allows higher data rates on the serial ports for more efficiency.

The new High Speed USB Serial Adapter line gives your laptop or workstation the ability to communicate between a USB port and up to eight RS-232, RS-422, or RS-485 serial peripherals. It adds the COM port(s) via its USB connection and is compatible with new and legacy RS-232 or RS-232/422/485 devices. The USB Serial Adapters are the ideal solution for a variety of industries and applications including banking, retail and industrial automation where PCs have a significantly shorter lifecycle than the peripherals that use them.

As we continue in the race to become the industry leader, our high performance device connectivity line expands with the new high speed USB 2.0 Serial Adapters. The next generation USB Serial Adapter hits speeds of up to 921.6 kbps, 1024-byte FIFO and hardware and software flow control.

Our USB Serial Adapters enumerate themselves as standard COM ports that are compatible with all standard RS-232 or RS-232/422/485 devices and software created for them. With the industrial surge suppression "IND" option, you can safeguard the USB Serial Adapter. The "IND" option is ideal for implementing USB-to-serial networks in factories, power plants and other potentially harsh industrial environments. USB 2.0 is fully compatible with USB 1.1 devices. The older devices work with the new bus, and vice versa.

The 400 Series models introduce the software-selectable RS-232/422/485 (Multi-Electrical Interface or MEI). The MEI capability is available on all ports at the click of a mouse. LEDs visually tell you which ports are using which protocol, so go ahead, mix and match.

Embedded USB Serial Adapters for custom enclosures

If you're looking to seamlessly connect multiple serial peripherals via a single USB port in a custom enclosure, try our board-level solutions, Embedded USB Serial Adapters.

KEY FEATURES

- 1, 2, 4 or 8 independent serial ports
- RS-232 or software-selectable RS-232/422/485
- Compatible with USB 1.1
- Plug-and-play capability
- Devices enumerate themselves as standard COM ports
- Speeds up to 921.6 kbps
- High speed UARTs with 1KB FIFOs to boost data rates
- Optional surge suppression package (standard on Embedded products)
- Full modem control and hardware and software flow control
- Bus powered: no external power required
- Embedded (board-only) units also available
- Windows 2000/XP, Linux support coming soon
- RoHS compliant
- 5 year warranty

HIGH SPEED USB SERIAL ADAPTER SPECIFICATIONS (VERSION 2.0)

Ordering Information

Model	Ports	Interface
SSU2-100	1	RS-232 with cable
DSU2-100	2	RS-232 with cable
DSU2-400	2	RS-232/422/485 with cable
QSU2-100	4	RS-232 with cable
QSU2-400	4	RS-232/422/485 with cable
ESU2-100	8	RS-232 with cable
ESU2-400	8	RS-232/422/485 with cable

Bus Interface

USB 2.0 High Speed

OS Support

Windows 2000/XP, Linux support coming soon

Data Rate

Up to 921.6 kbps (max)

Serial Ports Provided

SSU: 1 **DSU:** 2 **QSU:** 4 **ESU:** 8
 (For 400 models, each configurable as RS-232, RS-422 or RS-485 for full or half duplex communication)

USB Ports Required

SSU: 1 **DSU:** 1 **QSU:** 1 **ESU:** 1

UARTS

1024-byte FIFOs for transmit and receive

Transceiver (RS-232/422/485)

MAX491 or compatible

Differential Driver Output (50Ω Load):

+2V (min), +3.3V (max)

Differential Driver Output (27Ω Load):

+1.5V (min), +3.3V (max)

High Input: +2V (min)

Low Input: +0.8V (max)

Driver Rise/Fall Time: 5ns (min), 20ns (typ), 25ns (max)

Driver Input to Output Delay: 20ns (min), 40ns (typ), 60ns (max)

Receiver Input to Output Delay: 40ns (min), 70ns (typ), 100ns (max)

RS-232 Output

Voltage Swing: ±5V (min), ±5.4V (typ)

RS-232 Input

Voltage Range: -15V (min), +15V (max)

Input Threshold Low: 0.6V (min), 1.0 (typ)

Input Threshold High: 2.4VV (max), 1.5 (typ)

IND Option: Surge suppression applied to each line that is capable of sustaining up to 40A peak, 8 x 20is transient surges, a clamping voltage of 30V and a peak energy dissipation of 0.1 Joules.

(NOTE: The "IND" option limits data rate to 115.2 kbps)

Environment

Operating: 0° to 70°C

Storage: -50° to 80° C

Humidity: 10% to 90%

Power Requirements

Bus-powered device, no external power supply required

Suspend power: < 500 i A

Unconfigured power: < 100 mA

Configured power: < 500 mA

Size

SSU: 3.6" L x 1.7" W x 1" H

DSU/QSU: 9.18" L x 5.25" W x 1.675" H


ESU: 9.18" L x 5.25" W x 2.363" H

Connectors

DB-9 male

Certifications

CE, FCC Class B, RoHS & WEEE Compliant

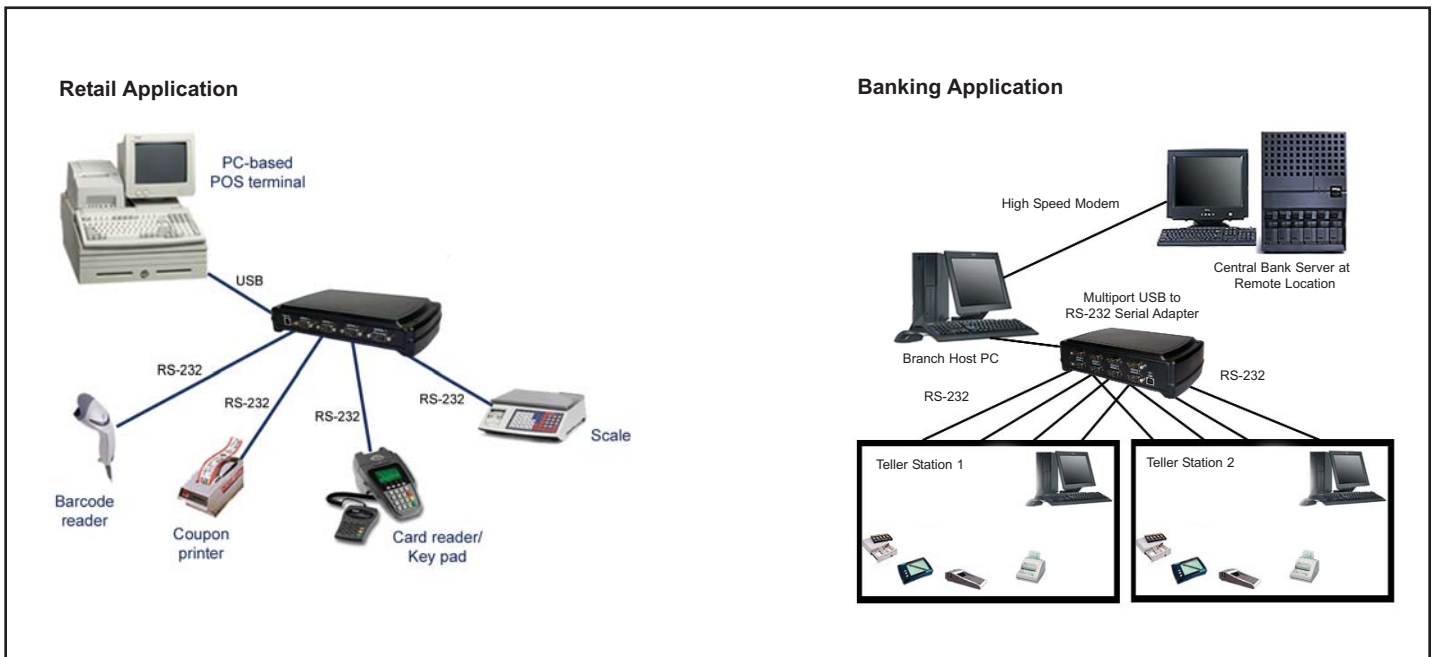

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [B&B Electronics](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)