


USB-5801

4-ch, 24-bit, 192 kS/s Dynamic Signal Acquisition USB 3.0 I/O Module with Analog Output and Tachometer

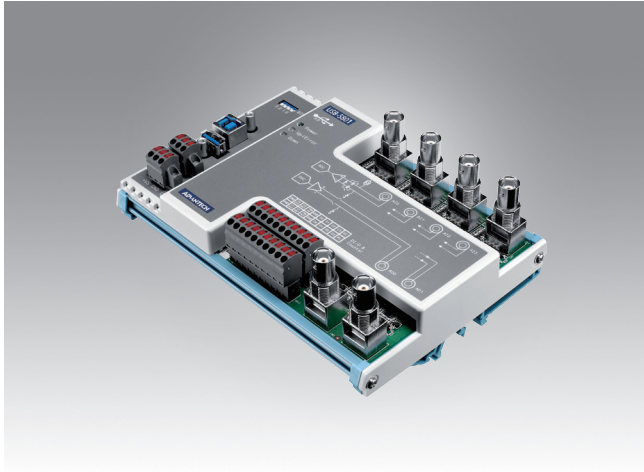

Features

- USB 3.0 SuperSpeed and daisy chainable by built-in USB hub
- 4 simultaneously sampled analog inputs, up to 192 kS/s
- 24-bit resolution ADCs with -95 dB total harmonic distortion plus noise (THD+N)
- Built-in anti-aliasing filter
- 2 mA integrated electronic piezoelectric (IEPE) excitation currents
- 2 analog outputs with update rate up to 192 kS/s
- 24-bit resolution DACs with -91 dB total harmonic distortion plus noise (THD+N)
- 2 tachometer inputs for period or frequency measurement
- 4-ch isolated digital input and 4-ch isolated digital output

Introduction

USB-5801 is a high accuracy dynamic signal acquisition USB 3.0 module specifically designed for vibration and acoustic measurements. It provides four simultaneously sampled, 24-bit, IEPE sensor inputs with up to 192 kS/s sample rate for high resolution measurements. It is also equipped with two 24-bit analog outputs with up to 192 kS/s update rate. In addition, it has two tachometer inputs whose data can be correlated to the sensor data. The built-in USB hub makes this module daisy chainable with other USB-5000 series products.

Specifications

Analog Input

- **Channels** 4 (simultaneous sampling, 50 Ω pseudo-differential configurable)
- **Resolution** 24 bits (delta-sigma ADC)
- **Max. Sampling Rate** 1 ~ 192 kS/s
- **Input Coupling** AC/DC, selectable per channel
- **Trigger Modes** Start, Delayed Start, Stop, Delayed Stop
- **Input Range** ± 1 V, ± 2 V, ± 5 V, ± 10 V
- **Offset Error** $< \pm 0.2$ mV
- **Gain Error** $< \pm 0.02\%$ of full-scale range
- **Total Harmonic Distortion Plus Noise (THD+N)** -95 dB
- **IEPE Excitation** 2 mA

Analog Output

- **Channels** 2 (50 Ω pseudo differential)
- **Resolution** 24 bits (delta-sigma DAC)
- **Update rate** 1 ~ 192 kS/s
- **Output coupling** DC
- **Output range** ± 1 V, ± 10 V
- **Offset error** $< \pm 0.5$ mV
- **Gain error** $< \pm 0.03\%$ of full-scale range
- **Total harmonic distortion plus noise (THD+N)** -91 dB
- **Trigger mode** Start, delay to start, stop, delay to stop
- **Auto calibration** Yes

Tachometer Input

- **Channels** 2
- **Input voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (30 V max.)
- **Input frequency** 5 kHz max.
- **Isolation protection** 2,500 V_{DC}
- **Digital Filter** 16 μ s ~ 131 ms

Digital Input

- **Channels** 4
- **Input voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (30 V max.)
- **Opto-isolator response time** 100 μ s
- **Isolation protection** 2,500 V_{DC}
- **Digital Filter** 16 μ s ~ 131 ms

Digital Output

- **Channels** 4
- **Load voltage** 5 ~ 40 V_{DC}
- **Load current** 350 mA/ch (sink)
- **Opto-isolator response time** 100 μ s
- **Isolation protection** 2,500 V_{DC}

General

- **Interface** USB 3.0
- **Data transfer rate** 5 Gbps
- **Connectors** 6 x BNC (AI and AO)
2 x 10-pin, 3.81-mm terminal blocks (tachometer, trigger, and DI/O)
2 x 3-pin, 3.81-mm terminal blocks (power)
1 x USB 3.0 type A (downstream port)
1 x USB 3.0 type B (upstream port)
- **Dimensions** 168 mm x 120 mm x 40 mm (6.6" x 4.7" x 1.6")
- **Operating temperature** 0 ~ 60 °C (32 ~ 140 °F)
- **Storage temperature** -40 ~ 70 °C (-40 ~ 158 °F)
- **Storage humidity** 5 ~ 95% RH (non-condensing)
- **Power supply** External 10 ~ 30 V_{DC} or USB bus power
- **Power consumption** 150 mA typ./200 mA max. @24 V external power
700 mA typ./860 mA max. @5 V bus power

Ordering Information

- **USB-5801-AE** 4-ch, 24-bit, 192 kS/s Dynamic Signal Acquisition USB 3.0 I/O Module with Analog Output and Tachometer
- **96PSD-A40W24-MM** DIN RAIL A/D 100-240V 40W 24V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Data Logging & Acquisition](#) category:

Click to view products by [B+B SmartWorx](#) manufacturer:

Other Similar products are found below :

[PCI-6208A](#) [DAQe-2502](#) [PXI-2208](#) [ACL-8112DG](#) [SpotBotBLE](#) [LPCI-7230](#) [USB-4761-BE](#) [SE028](#) [PCI-1761-BE](#) [AR207/8/S1/PPPP/IP65](#)
[PCI-1711UL-CE](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4716-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [PCIE-1810-AE](#) [PCI-1710U-DE](#) [PCI-](#)
[1710HGU-DE](#) [AR207/8/S1/PPPP/IP30](#) [U2781A](#) [4610](#) [EL-USB-5](#) [AR407/S1/P/P/P/P](#) [AR207/8/S2/PPPP/IP30](#) [ACL-8112PG](#) [cPCI-7248](#)
[cPCI-7433](#) [DAQ-2213](#) [ND-6053](#) [ND-6060](#) [PCI-7230](#) [PCI-7432](#) [PCI-9111DG](#) [PCI-9112](#) [PCI-9112A](#) [PCI-9113A](#) [PCI-9221](#) [PCM-7248+](#)
[USB-1903](#) [USB-2401](#) [PCIE-1813-AE](#) [PCIE-1816-AE](#) [PCIE-1816H-AE](#) [PCIE-1884-AE](#) [USB-5856-AE](#) [USB-5862-AE](#)
[AR654/S1/P/P/P/P/IP30](#) [AR654/S2/P/P/P/P/IP30](#) [DAS30](#)