



ISSUE 13; October 2012 - RoHS 2011/65/EU

**Description**

- Standard 7 x 5mm SMD crystal. 7 x 5mm SMD crystal available in three different pad designs and two different package materials. 12SMX-A, -C, -D are ceramic package with a resin sealed ceramic lid, hermetically sealed. 12SMX-B is a ceramic package with a seam sealed metal lid, hermetically sealed. Please Note: 12SMX-B is the standard package style. For low profile version of a 7 x 5mm crystal please see our 14SMX. For tighter tolerances and stabilities please see our 14SMX. Stock parts available.

**Frequency Range**

- Frequency 6.0 to 84.0Mhz
- Frequency Stability  $\pm 20.00\text{ppm}$
- Frequency Tolerance  $\pm 20\text{ppm}$  to  $\pm 100\text{ppm}$

**General Specification**

- Load Capacitance (CL) 10.0pF to 75.0pF
- Drive Level 100 $\mu$ W max
- Ageing  $\pm 5\text{ppm}$  per year max
- Shunt Capacitance (C0) 7pF max

**Operating Temperature Ranges**

- 0 to 50°C
- 10 to 60°C
- 20 to 70°C
- 40 to 85°C

**Environmental Parameters**


- Storage Temperature Range: -40 to 85°C

**Ordering Information**




- Frequency\*
- Model\*
- Variant\*
- Frequency Tolerance (@25°C)\*
- Frequency Stability (over operating temperature range)\*
- Operating Temperature Range\*
- Load Capacitance\*
- Overtone
- Example  
10.0MHz 12SMX-B  
50/50/-20 to 70C/10 FUND

**Packing Details**


- Pack Style: **Bulk** Loose in bulk pack  
Pack Size 100
- Pack Style: **Reel** Tape and reel in accordance with EIA-481-D  
Pack Size 1,000
- Alternative packing options available

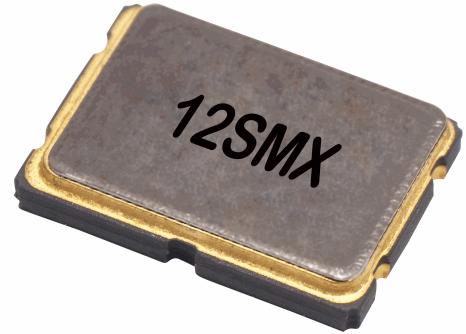




Outline (mm) -A = 2 pad (ceramic lid)



Solder Pad Layout




-B = 4 pad (metal lid)



Pad Connection

1. Crystal
2. GND & Lid
3. Crystal
4. GND & Lid

Solder Pad Layout



**Sales Office Contact Details:**


UK: +44 (0)1460 270200  
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18  
USA: +1 (0)408.273.4530


Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**-C = 2 into 4 pad (ceramic lid)**

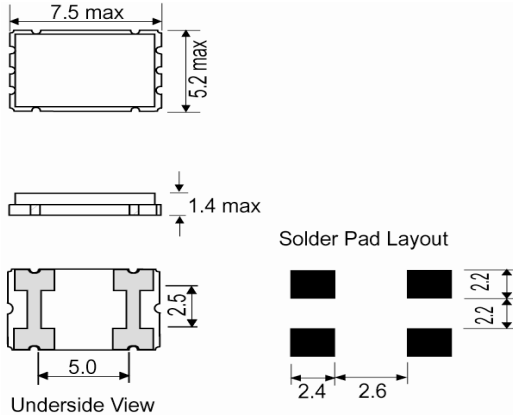

**-D = 4 pad (ceramic lid)**

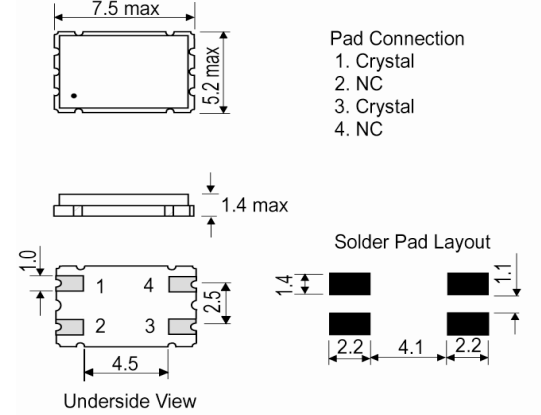

**Electrical Specification - maximum limiting values**

Frequency Range	Frequency Tolerance	Stability		Temperature Range	ESR Max	Vibration Mode
		Min	Max			
6.0 to <8.0MHz	±20 to ±100ppm	±20ppm ±20ppm ±20ppm ±30ppm	±100ppm	0 to 50°C -10 to 60°C -20 to 70°C -40 to 85°C	150Ω	Fundamental
8.0 to <10.0MHz	±20 to ±100ppm	±20ppm ±20ppm ±20ppm ±30ppm	±100ppm	0 to 50°C -10 to 60°C -20 to 70°C -40 to 85°C	80Ω	Fundamental
10.0 to <16.0MHz	±20 to ±100ppm	±20ppm ±20ppm ±20ppm ±30ppm	±100ppm	0 to 50°C -10 to 60°C -20 to 70°C -40 to 85°C	60Ω	Fundamental
16.0 to <50.0MHz	±20 to ±100ppm	±20ppm ±20ppm ±20ppm ±30ppm	±100ppm	0 to 50°C -10 to 60°C -20 to 70°C -40 to 85°C	40Ω	Fundamental
50.0 to <84.0MHz	±20 to ±100ppm	±20ppm ±20ppm ±20ppm ±30ppm	±100ppm	0 to 50°C -10 to 60°C -20 to 70°C -40 to 85°C	60Ω	3RD Overtone

*This document was correct at the time of printing; please contact your local sales office for the latest version*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200

Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18

USA: +1 (0)408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [iqd manufacturer](#):*

Other Similar products are found below :

[LFXTAL071761CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063802BULK](#) [LFOCXO063809BULK](#)  
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO070028Cutt](#) [LFTVXO063701BULK](#)  
[LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003156](#) [LFMCXO063766BULK](#)  
[LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#) [LFTCXO063716BULK](#)  
[LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#) [LFTVXO063790BULK](#) [LFXTAL003113](#)  
[LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [LFSPXO009686Bulk](#) [LFRBXO059244Bulk](#) [LFTVXO075802Cutt](#)  
[LFOCXO067293Bulk](#) [LFTCXO075792Cutt](#) [LFMCXO064079BULK](#) [LFSPXO071189](#) [LFOCXO067293](#) [LFXTAL012312BULK](#)  
[LFTCXO063780BULK](#) [LFSPXO056269CUTT](#) [LFOCXO063803BULK](#) [LFSPXO009592CUTT](#) [LFOCXO065520Bulk](#) [LFMISC070550Bulk](#)  
[LFSPXO025494Cutt](#) [LFMCXO064080BULK](#) [LFOCXO063804BULK](#) [LFSPXO019884BULK](#)