

210




- High protection rating IP 65
- B 15 d socket integrated in the base
- Safe CAGE CLAMP® technology
- Small shape with high dome
- Optimum illumination
- Available for base or bracket mounting
- Connection without the need to disassemble the product

TECHNICAL SPECIFICATIONS:

Housing:	PA 6.6 GF, black
Dome:	Polycarbonate, transparent
Connection:	CAGE CLAMP® technology up to 2,5mm ² max. Contact protection according to VDE

	210	213
Fixing:	Base mounting with flat seal	Bracket mounting, including cable gland M 12 x 1,5
Dimensions (Diameter x Height):	57 mm x 82 mm	57 mm x 82 mm
Weight:	55 g	61 g
Operating voltage:	max. 250 V	max. 250 V
Bulb socket:	B 15 d, 10 Watt max.	B 15 d, 10 Watt max.
Bulb change:	via removal of dome	via removal of dome
Bulbs not included in assembly		

210 Permanent/LED/Flashing Beacon

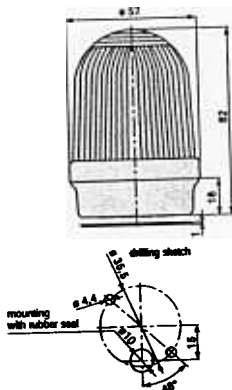

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [werma](#) manufacturer:

Other Similar products are found below :

[64140000](#) [64330068](#) [64411068](#) [64751075](#) [14095060](#) [96000002](#) [42532068](#) [64310055](#) [64712055](#) [64722055](#) [64732055](#) [82810055](#) [85320055](#)
[57005258](#) [63081000](#) [85310060](#) [64752055](#) [64411075](#) [64711075](#) [64721075](#) [42512075](#) [21010000](#) [69831075](#) [85311060](#) [82830055](#) [20310000](#)
[64421075](#) [57005267](#) [58400068](#) [82620000](#) [20410075](#) [42412075](#) [82610000](#) [64731075](#) [96000014](#) [57005268](#) [64150000](#) [21330000](#) [69821075](#)
[58015255](#) [44430075](#) [64589075](#) [97584091](#) [14095050](#) [42432068](#) [63082000](#) [85330055](#) [13400075](#) [15010055](#) [58400075](#)