

2.9mm Co-axial Attenuators DC - 40 GHz

NEW
from Midwest
Microwave



SPECIFICATIONS - HIGH PERFORMANCE

Frequency: DC to 40.0 GHz

Attenuation Accuracy: DC to 26.5 GHz DC to 40.0 GHz
3 & 6dB: $\pm 0.5\text{dB}$ $\pm 0.8\text{dB}$
10 & 20dB: $\pm 0.6\text{dB}$ $\pm 1.0\text{dB}$


VSWR: DC to 18.0 GHz 1.30:1
18.0 to 40.0 GHz 1.40:1

Power: 1 Watts average @ +25°C derated linearly to .5 Watts @ +125°C

Operating Temperature Range: -65°C to +125°C

Finish: Passivated Stainless Steel

| DC - 40.0 GHz | 640 Series | Model Numbers |
|---|--------------------|--------------------|
| Male/Female | Female/Female | Male/Male |
| ATT-0640-XX-29M-02 | ATT-640F-XX-29M-02 | ATT-640M-XX-29M-02 |
| XX - Attenuation Value: Select 3, 6, 10, 20dB | | |
| For Attenuators with Hex Body substitute HEX for 29M in model No. | | |

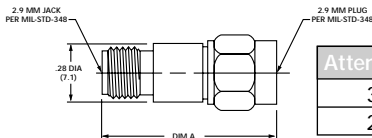

| Attenuation Value | Length A |
|-------------------|------------|
| 3, 6, 10dB | .86 (21.8) |
| 20dB | .86 (21.8) |



MIDWEST MICROWAVE

United States Tel: 00 1 734 429 4773 Fax: 00 1 734 429 1415
e: sales@midwest-microwave.com www.midwest-microwave.com

UK and Europe Tel: +44(0) 1245 359515 Fax: + 44(0) 1245 358938
e: sales@midwest-microwave.ltd.uk www.midwest-microwave.ltd.uk

2.9mm Co-axial Attenuators DC - 40 GHz



NEW
from Midwest
Microwave

Attenuators

2.9mm DC - 40 GHz

Midwest Microwave's 2.9mm Subminiature Series of fixed coaxial attenuators provide temperature stable, ruggedly built precision performance in a compact light weight package size.

SPECIFICATIONS - HIGH PERFORMANCE

Frequency: DC to 40.0 GHz

Attenuation Accuracy: DC to 26.5 GHz DC to 40.0 GHz
 3 & 6dB: ± 0.5 dB ± 0.8 dB
 10 & 20dB ± 0.6 dB ± 1.0 dB

VSWR: DC to 18.0 GHz 1.30:1
 18.0 to 40.0 GHz 1.40:1

Power: 1 Watts average @ +25°C derated linearly to .5 Watts @ +125°C

Operating Temperature Range: -65°C to +125°C

Finish: Passivated Stainless Steel

| DC - 40.0 GHz | 640 Series | Model Numbers |
|---|--------------------|--------------------|
| Male/Female | Female/Female | Male/Male |
| ATT-0640-XX-29M-02 | ATT-640F-XX-29M-02 | ATT-640M-XX-29M-02 |
| XX - Attenuation Value: Select 3, 6, 10, 20dB | | |
| For Attenuators with Hex Body substitute HEX for 29M in model No. | | |



MIDWEST MICROWAVE

United States Tel: 00 1 734 429 4773 Fax: 00 1 734 429 1415
 e: sales@midwest-microwave.com www.midwest-microwave.com

UK and Europe Tel: +44(0) 1245 359515 Fax: + 44(0) 1245 358938
 e: sales@midwest-microwave.ltd.uk www.midwest-microwave.ltd.uk

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Attenuators - Interconnects](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[R411803119](#) [R413806115](#) [R413808000](#) [R413810115](#) [R413850115](#) [R414510000](#) [R414701000](#) [R415303000](#) [BNC-13](#) [R411800121](#)
[R411801121](#) [R412412124](#) [R412450000](#) [R413800000](#) [R413805000](#) [R413830000](#) [R413840115](#) [R414730000](#) [R415420000](#) [R415703000](#)
[R416010000](#) [R420003110](#) [R411801000](#) [R411815121](#) [R413305000](#) [R413801000](#) [R414520000](#) [R411808121](#) [R412500124](#) [R412414124](#)
[R412501124](#) [HMC-C584](#) [R413802000](#) [R412400124](#) [R411700124](#) [R417310130](#) [R411801119](#) [R412419124](#) [R411703124](#) [R412401124](#)
[R443131000](#) [R417130110](#) [R414700000](#) [R414505000](#) [R411802119](#) [R417720128](#) [R420706110](#) [R413811000](#) [R413803115](#) [R414501000](#)