

### 2 Watt High Performance

- DC - 2, DC - 8, DC - 12.4, DC - 18, and DC - 26.5GHz units available
- Low VSWR
- Rugged Stainless Steel Construction
- Small Size, Light Weight
- Bead Chain available on all Models

Midwest Microwave's SMA miniature series of high performance coaxial Terminations provide temperature stable, ruggedly built, low VSWR precision performance in a compact light weight package size. Bead Chains are available with any of the units described.

#### SPECIFICATIONS

**Impedance:** 50 Ohms

**Frequency:** DC - 26.5, DC - 18.0, DC - 12.4., DC - 8.0 and DC - 2.0 GHz

**VSWR:** 1.05 + 0.008 f ( GHz) max @ DC - 18.0 GHz, 1.30 max @ 18 - 26.5 GHz

**Power:** 2 Watts max @ 25 °C derated to 1 Watt @ +125°C

**Operating Temperature Range:** -65 to +125 °C

**Finish:** Passivated Stainless Steel



DC - 26.5 GHz	2054 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2054-M0-SMA-02		TRM-2054-MC-SMA-02

DC - 18 GHz	2055 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2055-M0-SMA-02		TRM-2055-MC-SMA-02

DC - 12.4 GHz	2056 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2056-M0-SMA-02		TRM-2056-MC-SMA-02

DC - 8.0 GHz	2058 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2058-M0-SMA-02		TRM-2058-MC-SMA-02

DC - 2.0 GHz	2059 Series	Model Numbers
Male Plug		Male Plug with Chain
TRM-2059-M0-SMA-02		TRM-2059-MC-SMA-02

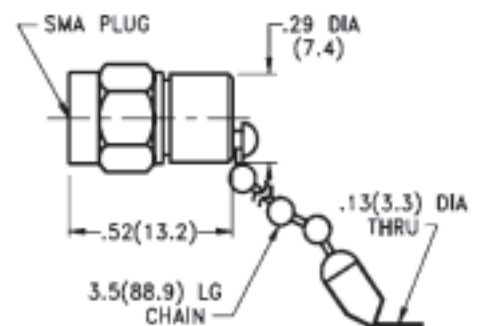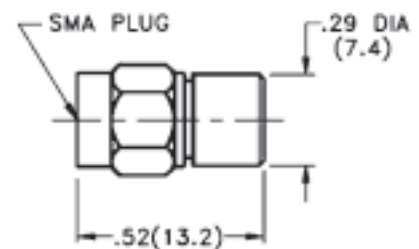

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Terminators](#) category:*

*Click to view products by [Bel Fuse](#) manufacturer:*

Other Similar products are found below :

[M390303-02N](#) [M39030/3-04S](#) [M39030/3-09S](#) [M39030/3-11N](#) [TNG1-9-78-D3](#) [TNA2-50](#) [TNG1-6-78](#) [TNH1-1-50](#) [TNGFL1-1-78](#)  
[R4042N5000](#) [53S1RR-001N3](#) [142275](#) [56S1RR-001N4](#) [65\\_BNC-50-0-7/133\\_NE](#) [71S1RR-001N4](#) [02S17R-001D3](#) [R404240120](#) [R404260000](#)  
[HT-10-2](#) [FL LCX 50-OHM-RSMA](#) [M39030/3-04N](#) [TNA1-6-50](#) [131-3801-811](#) [TNA1-1-50](#) [65\\_N-50-0-51/113\\_NE](#) [65\\_BNC-50-0-2/133\\_NE](#)  
[65\\_N-50-0-1/133\\_NE](#) [65002\\_N-50-1/122\\_NE](#) [65\\_MMCX-50-0-31/111\\_OE](#) [18K15R-0.5E3](#) [2702702](#) [TRM-2161-M0-35M-02](#) [53S17R-](#)  
[001N3](#) [1100.19.0001](#) [6701.01.B](#) [18S24H-40ML5](#) [TRM-2053-M0-NNN-02](#) [R404759000](#) [M39030/6-02N](#) [TRM-2080-M0-NNN-07](#) [TRM-](#)  
[2053-MC-NNN-02](#) [M39030/3-03S](#) [SF8012-6009](#) [6701.01.A](#) [65\\_MCX-50-0-4/111\\_NE](#) [65\\_716-50-0-2/003\\_-E](#) [65\\_SMB-50-0-1/111\\_NE](#)  
[M39030/3-12N](#) [82-5722-RFX](#) [8018-6174](#)