

Terminations

Type N Low Cost Types

Low Cost DC - 18 GHz Performance

- Type N Precision Performance
- Broad Frequency Band Coverage
- Low VSWR - 50 Ohm - High Performance.
- Rugged Stainless Steel Interface Construction

Midwest Microwave's Type N series of Low Cost coaxial Terminations provide temperature stable, ruggedly built, precision performance in light weight reasonably sized packages using stainless steel connectors. The units are designed to optimize cost reduction and their performance per cost ratio is excellent. Low VSWR performance is exhibited and units are suitable for a variety of commercial operating or test systems.



Low Cost Type N Precision - DC - 18 GHz

SPECIFICATIONS

Impedance: 50 Ohms

Frequency: DC - 18.0 GHz





VSWR: 1.25 max.

Power: 2 Watts average @ +25 °C derated linearly to 0.5 Watts @ +125 °C

Peak Power: 0.5 Kilowatts

Operating Temperature Range: -54 °C to +125 °C

DC - 18.0 GHz	2070 Series	Model Numbers
N Male Plug		N Male Plug with Chain
TRM-2070-M0-NNN-07		TRM-2070-MC-NNN-07
Female Jack		Female Jack with Chain
TRM-2070-F0-NNN-07		TRM-2070-FC-NNN-07

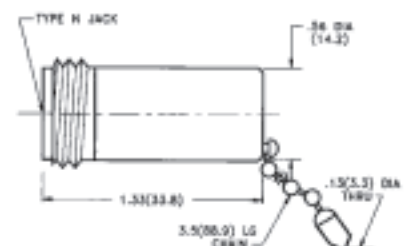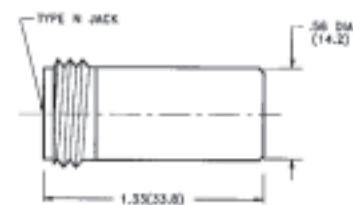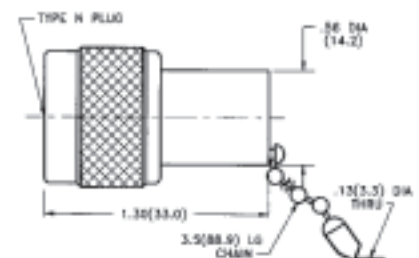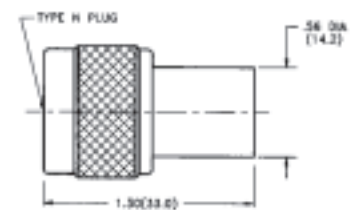

Low Cost Broadband Performance DC - 4.0 GHz

SPECIFICATIONS

Impedance: 50 Ohms

Frequency: DC - 4.0 GHz

VSWR: 1.15 max.

Power: 2 Watts average @ +25 °C derated linearly to 0.5 Watts @ +125 °C

Peak Power: 0.5 Kilowatts

Operating Temperature Range: -54 °C to +125 °C

DC - 4.0 GHz	2071 Series	Model Numbers
N Male Plug		N Male Plug with Chain
TRM-2071-M0-NNN-07		TRM-2071-MC-NNN-07
Female Jack		Female Jack with Chain
TRM-2071-F0-NNN-07		TRM-2071-FC-NNN-07

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Terminators](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[M390303-02N](#) [M39030/3-04S](#) [M39030/3-09S](#) [M39030/3-11N](#) [TNG1-9-78-D3](#) [TNA2-50](#) [TNG1-6-78](#) [TNH1-1-50](#) [TNGFL1-1-78](#)
[R4042N5000](#) [53S1RR-001N3](#) [142275](#) [56S1RR-001N4](#) [65_BNC-50-0-7/133_NE](#) [71S1RR-001N4](#) [02S17R-001D3](#) [R404240120](#) [R404260000](#)
[HT-10-2](#) [FL LCX 50-OHM-RSMA](#) [M39030/3-04N](#) [TNA1-6-50](#) [131-3801-811](#) [TNA1-1-50](#) [65_N-50-0-51/113_NE](#) [65_BNC-50-0-2/133_NE](#)
[65_N-50-0-1/133_NE](#) [65002_N-50-1/122_NE](#) [65_MMCX-50-0-31/111_OE](#) [18K15R-0.5E3](#) [2702702](#) [TRM-2161-M0-35M-02](#) [53S17R-](#)
[001N3](#) [1100.19.0001](#) [6701.01.B](#) [18S24H-40ML5](#) [TRM-2053-M0-NNN-02](#) [R404759000](#) [M39030/6-02N](#) [TRM-2080-M0-NNN-07](#) [TRM-](#)
[2053-MC-NNN-02](#) [M39030/3-03S](#) [SF8012-6009](#) [6701.01.A](#) [65_MCX-50-0-4/111_NE](#) [65_716-50-0-2/003_-E](#) [65_SMB-50-0-1/111_NE](#)
[M39030/3-12N](#) [82-5722-RFX](#) [8018-6174](#)