

Terminations

3.5 mm 26.5 GHz Type

DC - 26.5 GHz - 2 Watts High Performance

- Low VSWR
- Rugged Stainless Steel Construction
- Small Size, Light Weight
- Bead Chain available on all Models
- Mates with Standard SMA Interface

Midwest Microwave's 3.5mm series of high performance coaxial Terminations provide temperature stable, ruggedly built, low VSWR precision performance in a compact light weight package size. All Models mate non-destructively with standard SMA connector interfaces. Bead Chains are available with any of the units described.

SPECIFICATIONS

Impedance: 50 Ohms

Frequency: DC - 18.0 and DC - 26.5 GHz

VSWR: 1.12 max @ DC - 18.0 GHz and 1.18 max @ 18.0 - 26.5 GHz

Power: 2 Watts max @ 25 °C





Operating Temperature Range: -65 to +125 °C

Finish: Passivated Stainless Steel

DC - 26.5 GHz	2160 Series	Model Numbers
Male Plug	Male Plug with Chain	
TRM-2160-M0-35M-02	TRM-2160-MC-35M-02	
Female Jack	Female Jack with Chain	
TRM-2160-F0-35M-02	TRM-2160-FC-35M-02	

DC - 18.0 GHz	2161 Series	Model Numbers
Male Plug	Male Plug with Chain	
TRM-2161-M0-35M-02	TRM-2161-MC-35M-02	
Female Jack	Female Jack with Chain	
TRM-2161-F0-35M-02	TRM-2161-FC-35M-02	

Note: Bead Chains are 3.5 inches long

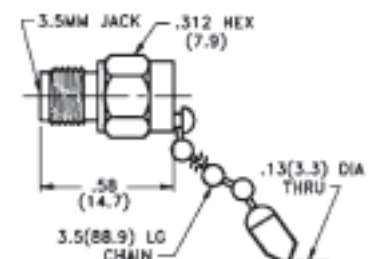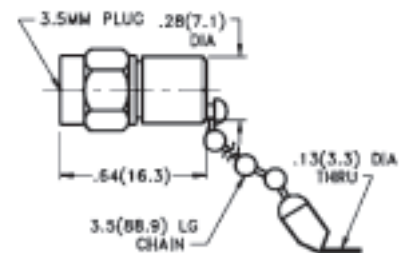

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Terminators](#) category:

Click to view products by [Bel Fuse](#) manufacturer:

Other Similar products are found below :

[M390303-02N](#) [M39030/3-04S](#) [M39030/3-09S](#) [M39030/3-11N](#) [TNG1-9-78-D3](#) [TNA2-50](#) [TNG1-6-78](#) [TNH1-1-50](#) [R404280000](#) [TNGFL1-1-78](#) [R4042N5000](#) [53S1RR-001N3](#) [142275](#) [56S1RR-001N4](#) [65_BNC-50-0-7/133_NE](#) [71S1RR-001N4](#) [02S17R-001D3](#) [R404240120](#) [R404260000](#) [HT-10-2](#) [FL LCX 50-OHM-RSMA](#) [M39030/3-04N](#) [TNA1-6-50](#) [131-3801-811](#) [TNA1-1-50](#) [65_N-50-0-51/113_NE](#) [65_BNC-50-0-2/133_NE](#) [65_N-50-0-1/133_NE](#) [65002_N-50-1/122_NE](#) [65_MMCX-50-0-31/111_OE](#) [18K15R-0.5E3](#) [2702702](#) [TRM-2161-M0-35M-02](#) [53S17R-001N3](#) [1100.19.0001](#) [6701.01.B](#) [18S24H-40ML5](#) [TRM-2053-M0-NNN-02](#) [R404759000](#) [M39030/6-02N](#) [TRM-2053-MC-NNN-02](#) [M39030/3-03S](#) [SF8012-6009](#) [6701.01.A](#) [65_MCX-50-0-4/111_NE](#) [65_716-50-0-2/003_-E](#) [65_SMB-50-0-1/111_NE](#) [M39030/3-12N](#) [82-5722-RFX](#) [8018-6174](#)