


Product Male cable connector, metal locking system, screw termination  
Area M12 connectors A-Coding serie 713

Pole 8  
Article number 99 0487 12 08


illustration



scale drawing

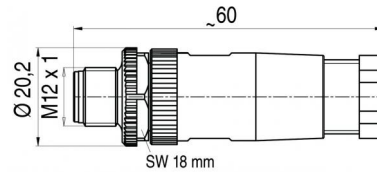

Contact Arrangement



	X	Y
1	2,69	0,57
2	0,57	2,69
3	-1,66	2,20
4	-2,75	0,19
5	-1,94	-1,94
6	0,19	-2,74
7	2,20	-1,65
8	0,00	0,00

You can find the item description and assembly instruction on the next page.

Technical data

Common values

Connector Design	Male cable connector
Connector locking system	Screw-locking
Termination	screw
Wire gauge (mm)	0,50 mm <sup>2</sup>
Wire gauge (AWG)	20
Upper temperature	+85 °C
Lower temperature	-40 °C

Material


Material of contact	CuZn (brass)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	PA

Cable data

Contacts 8: cable outlet: 6-8 mm, Male cable connector, metal locking system, screw termination

Electrical values

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	III
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 67
Mechanical operation	>100 mating cycles




Product Area Male cable connector, metal locking system, screw termination  
M12 connectors A-Coding serie 713


Pole 8  
Article number 99 0487 12 08

Date: 2013-06-04 - Page 2 of 2

Item description

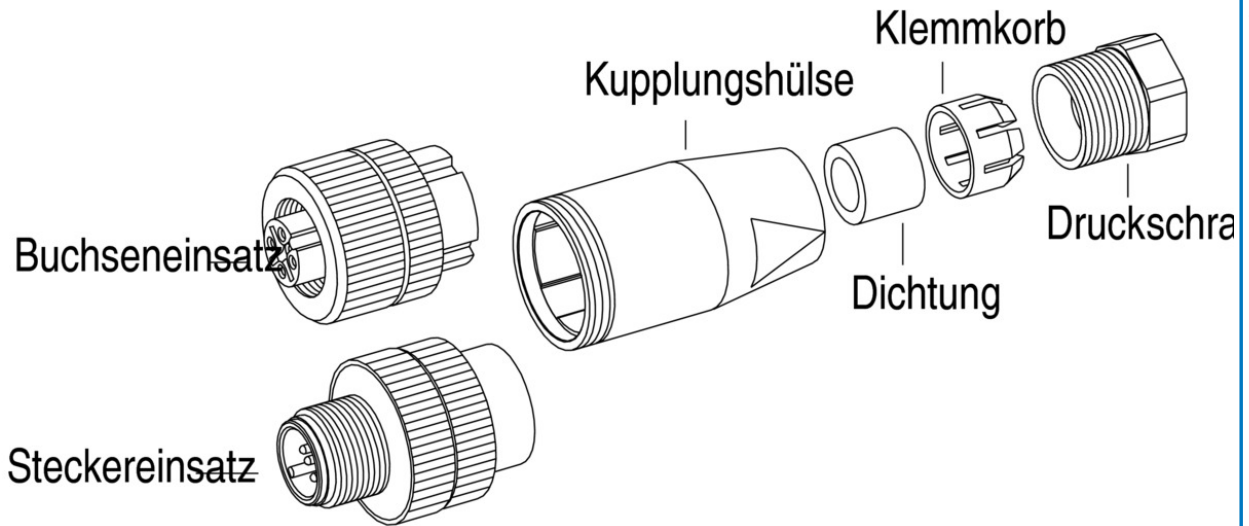

Installation instructions / Mounting cutout

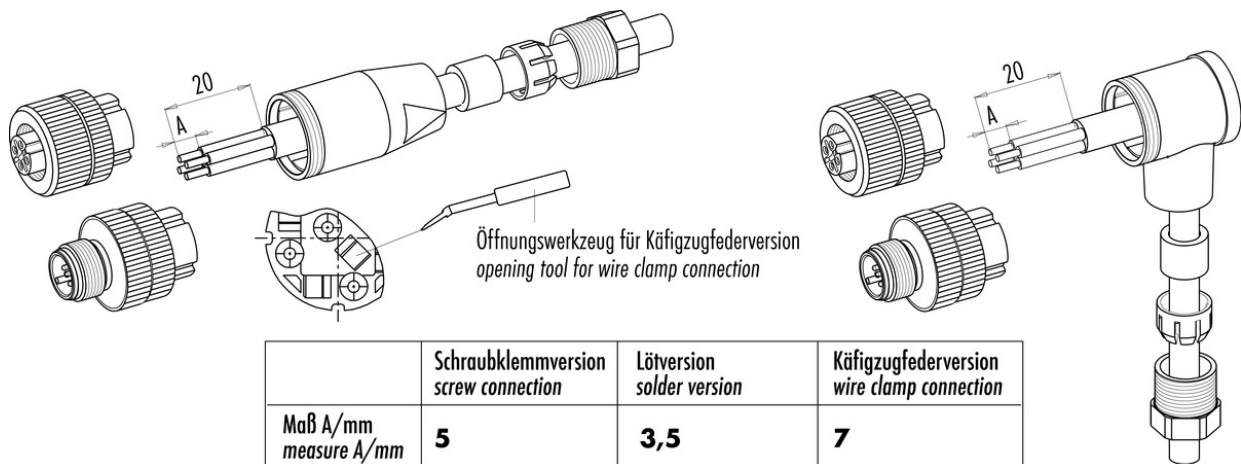

	Schraubklemmversion screw connection	Lötversion solder version	Käfigzugfederversion wire clamp connection
Maß A/mm measure A/mm	<b>5</b>	<b>3,5</b>	<b>7</b>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Binder manufacturer](#):*

Other Similar products are found below :

[79-6172-20-08](#) [99-2442-42-04](#) [08-1205-000-000](#) [99-9114-50-05](#) [76-0232-0015-00004-0200](#) [76-0532-1011-00008-0200](#) [08-2670-000-000](#) [09-0111-300-04](#) [09-0124-300-06](#) [99-5461-15-19](#) [99-9116-490-05](#) [99-9127-490-08](#) [99-9227-400-08](#) [99-3360-25-03](#) [99-3730-810-04](#) [99-4221-160-04](#) [99-4637-20-06](#) [79-3534-37-04](#) [09-0431-76-04](#) [99-0610-02-04](#) [09-0127-80-07](#) [99-4603-00-09](#) [09-0148-72-12](#) [99-5109-210-04](#) [99-5462-75-19](#) [79-9722-100-08](#) [31-5235-300-000](#) [77-3408-0000-20004-0500](#) [77-3534-0000-50704-0500](#) [77-3630-0000-50003-0200](#) [99-4627-10-12](#) [08-2301-000-000](#) [09 0137 70 04](#) [79-9723-020-08](#) [61-0796-085-00](#) [08-2636-400-001](#) [09-0123-782-06](#) [09-0129-70-12](#) [99-0629-19-04](#) [99-5105-40-03](#) [99-5125-15-07](#) [99-5172-75-08](#) [99-5606-15-03](#) [99-9135-490-12](#) [99-1429-822-04](#) [99-0436-15-05](#) [99-2440-62-03](#) [09-0041-00-07](#) [08-0045-000-001](#) [09-0323-80-06](#)