

Data Sheet

Sound Level Meters & Calibrator Models 732A, 735, and CAL73

Sound Level Meters

Whether you are testing for OSHA compliance, quieting equipment, or monitoring the roar of a stadium crowd, B&K Precision's sound level meters can get the job done. The model 732A and 735 provide 30~130 dB capability in three convenient measurement ranges Low, Med, and Hi with an accuracy of ± 1.5 dB. The meter meets the IEC 651 Type II and includes frequency weighting A & C, and fast and slow time weighting. Two auxiliary ports provide either AC output, 1 Vrms full scale, or DC output, 10 mV/dB. With the model 732A and 735, B&K Precision can meet all your sound testing needs.

Common Features (732A & 735)

- RS-232 Interface
- Bargraph
- MAX/MIN function
- Auto Ranging (30 ~ 130 dB)
- Resolution 0.1 dB
- Level Range Display
- AC/DC Signal Output
- Auto Power Off
- Backlit LCD


Features (735 only)

- Windows Software Included
- Clock Display
- 32,000 Records Data Logger



732A

735

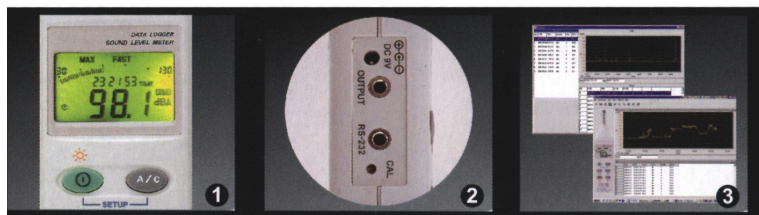

Back light function

RS-232 Interface

RS-232 Software for
Windows® 95/98 2000/XP
included with model 735

Standard Acoustic Calibrator

The CAL73 sound level calibrator is used to calibrate sound level meters and other sound measurement equipment. You can calibrate 1 inch diameter microphones directly and 1/2 inch microphones using 1/2 inch adapter supplied with the calibrator.

Features

- Conforms to IEC 60942 (2003) Class 2, ANSI S1.40-1984
- 94 dB and 114 dB Sound calibrator at 1 kHz
- Accurate and simple to use
- Fits 1 inch and 1/2 inch microphones



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Calibration Equipment](#) category:

Click to view products by [B&K Precision](#) manufacturer:

Other Similar products are found below :

[700P27](#) [AX-C830](#) [AKT8R112100](#) [AKT4R1111001](#) [AKT4R1121001](#) [AKT4R1122001](#) [AR604/P](#) [FLUKE-700G08](#) [461750](#) [AX-C850](#) [RT-820](#) [FLUKE 709](#) [FLUKE-805](#) [AKT4R111100](#) [AKT4R111200](#) [AKT4R112100](#) [AKT7111100J](#) [AKT7211100J](#) [AKT7212100J](#) [AKT8R111100](#) [REF2510R](#) [412355A](#) [461831](#) [461895](#) [461920](#) [480400](#) [480403](#) [PRC10](#) [PRC15](#) [PRC20](#) [PRC30](#) [700P02](#) [700P27EX](#) [700P29](#) [FLUKE-789](#) [U086](#) [U087](#) [03K30R-MSOTS3](#) [18CK010-150](#) [P5514-70M](#) [P5515-140M](#) [12890](#) [TACH-10](#) [461950](#) [461825](#) [461830](#) [461891](#) [350456](#) [CAL73](#) [DCS025](#)