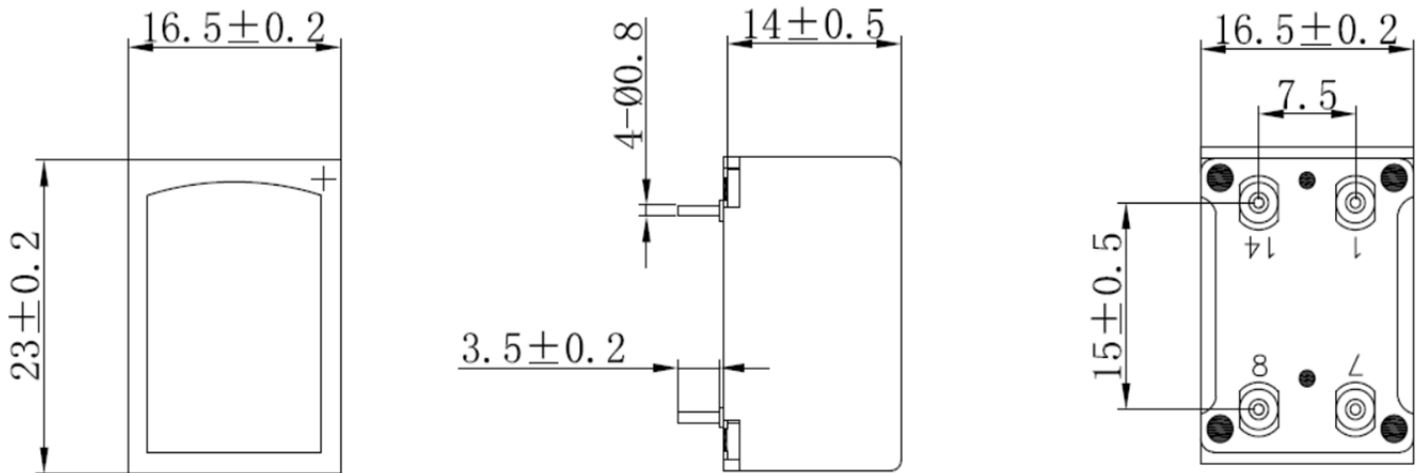


**Specifications:**

Resonant Frequency (Hz)	400 ± 100
Operating Voltage (Vdc)	4 ~ 8
Rated Voltage (Vdc)	6
Current Consumption Max. (mA)	30 at Rated Voltage
Sound Pressure Level Min. (dB)	80 at 30cm at Rated Voltage
Tone/Pulse Rate	Constant
Operating Temperature (°C)	-20 ~ +70
Storage Temperature (°C)	-30 ~ +85
Housing	ABS 757 plastic resin (Color: Black)
Leading Pin	Tin Plated Brass
Condition by Hand Soldering (°C)	350 ± 20° within 5 seconds
Weight (Grams)	8.8
Options	For other options contact factory

**Dimensions:** (units: mm)**ROHS Compliant**

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [sonalert](#) manufacturer:*

Other Similar products are found below :

[PK-27A35EPDBQ](#) [SC250JR](#) [SC628AD](#) [SC648AN](#) [PK-35A29W-24VQ](#) [PK-21A36PQ](#) [SC110D](#) [ZA028LDDP2](#) [PK-35H29W-24VQ](#)  
[SC110NJ](#) [PK-12N40PEDGQ](#) [PK-21N31PQ](#) [SC110P](#) [SC110N](#) [SC648](#) [SC628ANJ](#) [SC628N](#) [SC110](#) [SC628ANP](#)