

SOT-23


1. BASE
2. EMITTER
3. COLLECTOR

MARKING: J3Y
Features

- Complimentary to M8550
- Collector Current: $I_C=0.8A$

Maximum Ratings

(Ratings at 25°C ambient temperature unless otherwise specified.)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	40	V
V_{CEO}	Collector-Emitter Voltage	25	V
V_{EBO}	Emitter-Base Voltage	6	V
I_C	Collector Current -Continuous	0.8	A
P_C	Collector Dissipation	0.2	W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55-150	°C

Electrical Characteristics








(Ratings at 25°C ambient temperature unless otherwise specified).

Parameter	Symbols	Test Condition	Limits		Unit
			Min	Max	
Collector-base breakdown voltage	$V(BR)CBO$	$I_C=100\mu A, I_E=0$	40		V
Collector-emitter breakdown voltage	$V(BR)CEO$	$I_C=1mA, I_B=0$	25		V
Emitter-base breakdown voltage	$V(BR)EBO$	$I_E=100\mu A, I_C=0$	6		V
Collector cut-off current	I_{CBO}	$V_{CB}=35V, I_E=0$		100	nA
Collector cut-off current	I_{CEO}	$V_{CE}=20V, I_B=0$		100	nA
DC current gain	$h_{FE(1)}$	$V_{CE}=1V, I_C=5mA$	45		
	$h_{FE(2)}$	$V_{CE}=1V, I_C=100mA$	80	400	
	$h_{FE(3)}$	$V_{CE}=1V, I_C=800mA$	40		
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C=800mA, I_B=80mA$		0.50	V
Base -emitter saturation voltage	$V_{BE(sat)}$	$I_C=800mA, I_B=80mA$		1.20	V
Transition frequency	f_T	$V_{CE}=6V, I_C=20mA, f=30MHz$	150		MHz

CLASSIFICATION OF $h_{FE(2)}$

RANK	L	H
RANGE	80-350	350-400

Typical characteristics

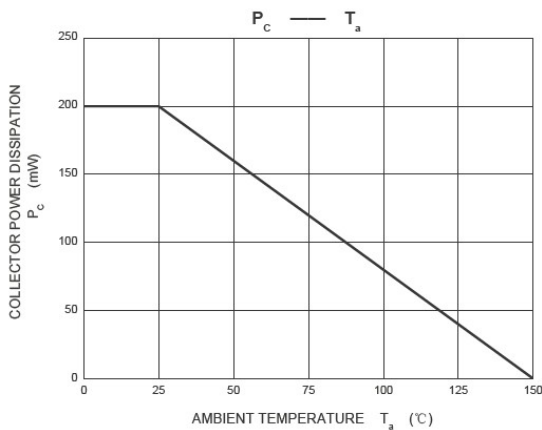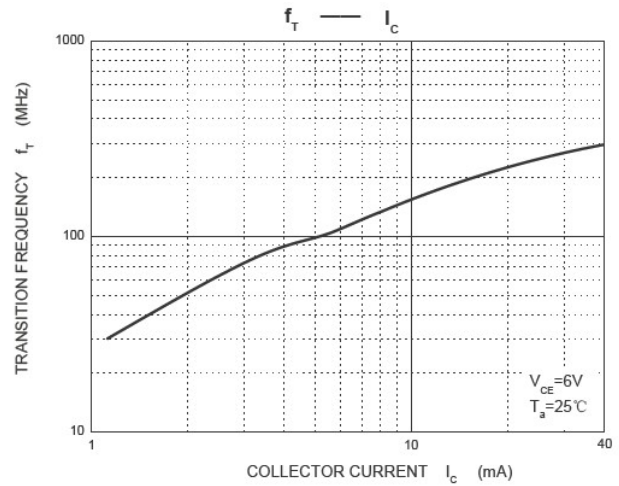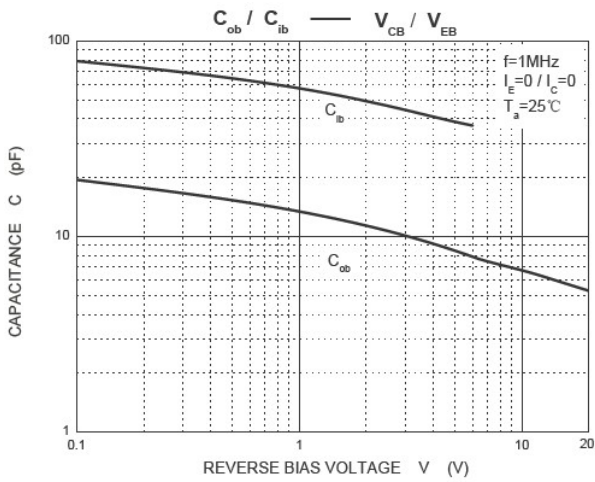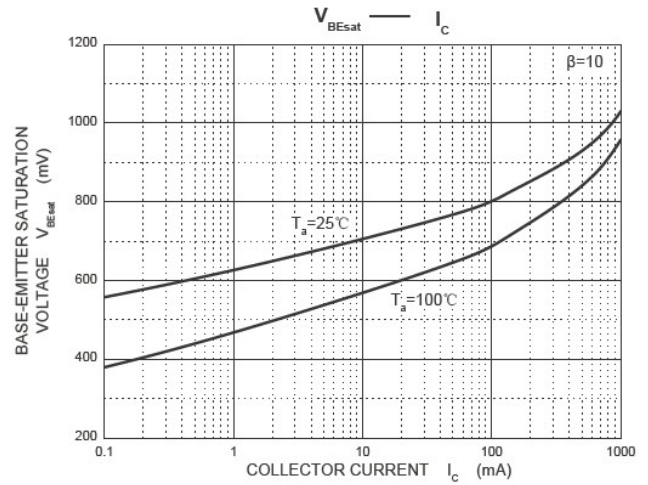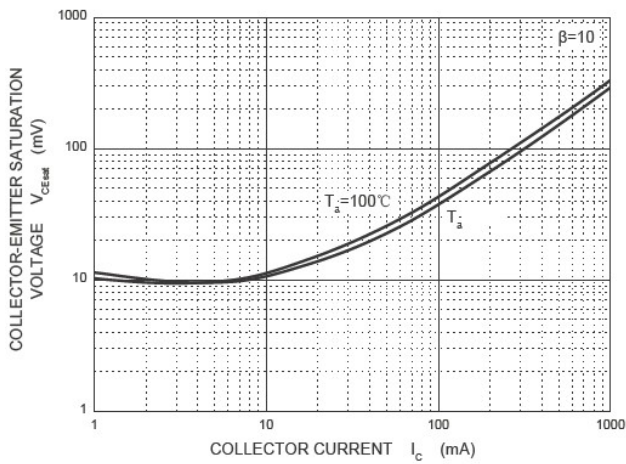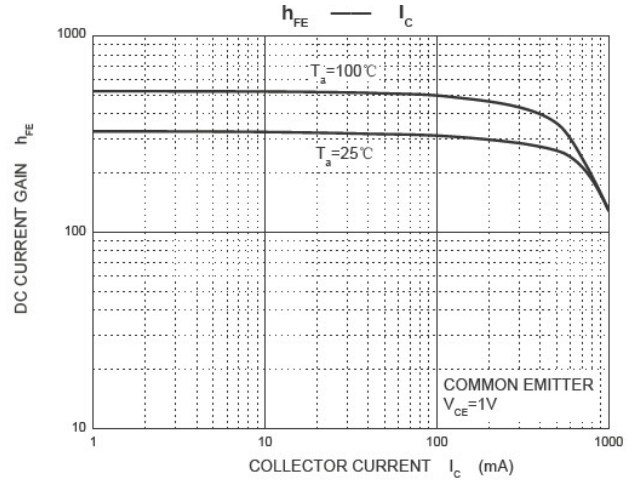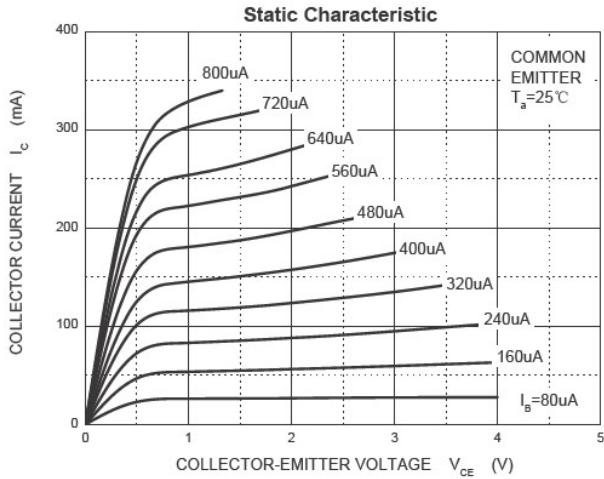

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [Bourne manufacturer](#):

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJL0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJL0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)