


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/10/03	

- DO-IT-YOURSELF (DIY) Ø4mm SHEATH BANANA JACK, SCREW ATTACHMENT
- SPECIFICATIONS:  
INSULATOR BODY: POLYPROPYLENE  
JACK BODY: BRASS, NICKEL PLATED
- RATING:  
VOLTAGE: 1000V CATIII P2 (per INSTRUCTIONS)  
REINFORCED INSULATION, CE MARK  
CURRENT: 36A MAX.  
INTERNAL RESISTANCE: <10mΩ  
TEMPERATURE: -20° TO +80° C.
- MAXIMUM WIRE SIZES:  
CONDUCTOR: Ø.090 (12AWG)  
INSULATION: Ø.16 (4.0) MAX.  
STRIP LENGTH: .25 (6.4)

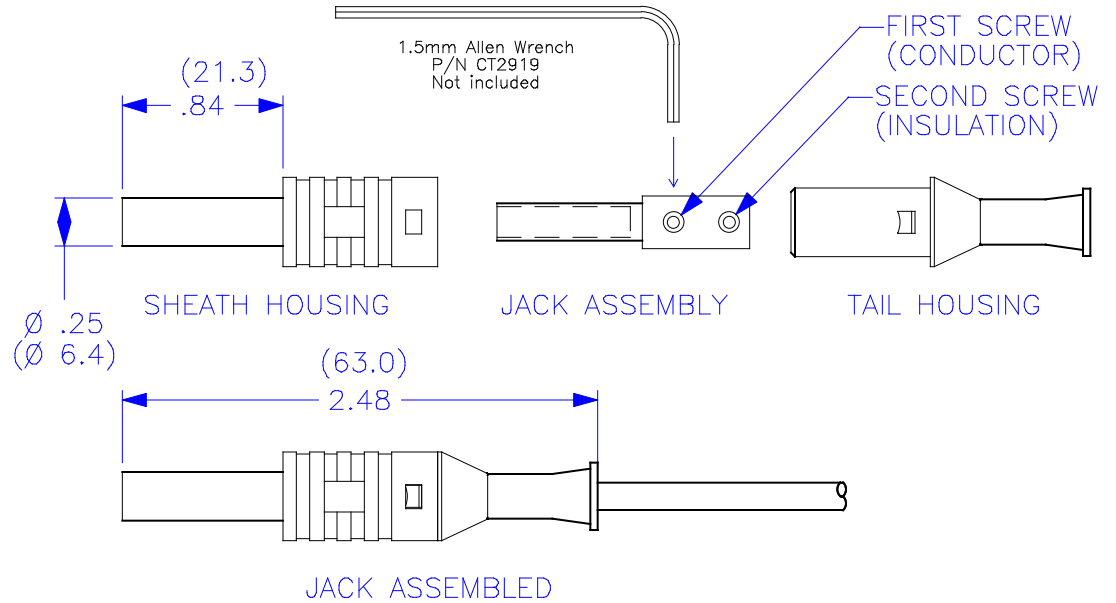

**PART NUMBER**

**CT3134-#**

- COLOR:
- 0 - BLACK
  - 2 - RED
  - 4 - YELLOW
  - 5 - GREEN
  - 6 - BLUE
  - 9 - WHITE

Assembly Instructions:

- Slide wire through Tail Housing.
- Strip wire .25" (6.4mm).
- Insert stripped wire into Jack Assembly and tighten First Set-Screw (conductor). Set-Screws use 1.5mm Allen Wrench (Cal Test P/N CT2919).
- Snug Second Set-Screw on wire insulation.
- Push Jack Assembly into Tail Housing.
- Snap Tail Housing assembly into Sheath Housing.

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS ± 1/32        .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		Cal Test Electronics		22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610				
			APPROVALS	DATE	TITLE						
		MATERIAL	DRAWN	WDH	7/10/03	DIY SHEATH JACK, SCREW ATTACHMENT					
		FINISH	CHECKED			SIZE	CAGE CODE	DWG. NO.	P313400	REV.	-
NEXT ASSY	USED ON		ENGR.			A					
APPLICATION			DESIGN ACTIVITY			SCALE	1:1			SHEET	1 OF 1

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Test Plugs & Test Jacks](#) category:*

*Click to view products by [Cal Test](#) manufacturer:*

Other Similar products are found below :

[01-2601-4-0210](#) [01-2601-4-0212](#) [01-2604-4-0212](#) [01-2604-5-0210](#) [01-2150-1-0312](#) [01-2350-1-02](#) [01-2352-1-02](#) [01-2368-1-02](#) [01-2604-4-0210](#) [01-2604-5-0212](#) [01-2606-4-0210](#) [01-2606-4-0212](#) [01-2606-5-0212](#) [M39024/10-01G](#) [M39024/10-17G](#) [M39024/11-09G](#) [M39024/11-42](#) [M39024/11-43](#) [M39024/12-08](#) [707-5311](#) [707-5402-01-19](#) [707-5410](#) [923739-40-I](#) [R644543000](#) [R948161000](#) [R999351000](#) [1408-4](#) [1499-101](#) [1533-1](#) [1659559](#) [1659567](#) [1663921](#) [1663939](#) [1696-102](#) [174-R825B-EX](#) [NYS508-BU](#) [NYS508-O](#) [211-101](#) [RS100GBL](#) [RS250GBL](#) [251-102](#) [25-2251-2-03](#) [25-2259-2-03](#) [923743-16-I](#) [923743-24-I](#) [923743-28-I](#) [2854-BLU](#) [2970-BLK](#) [30-443G](#) [1680](#)