

Multilayer Ferrite Beads



MECHANICAL SPECIFICATIONS

Solderability: 90 % coverage after 5 second dip in 235 °C solder following 60 second preheat at 120 °C to 150 °C and type R flux dip

Resistance To Solder Heat: 10 seconds in 260 °C solder after preheat and flux per above

Terminal Strength: 1.0 kilograms (2.2 pounds) minimum for 30 seconds

Beam Strength: 2.0 kilograms (4.4 pounds) minimum

STANDARD ELECTRICAL SPECIFICATIONS

IMPEDANCE (Ohms)	TOL.	FREQUENCY (MHz)	DCR MAX. (Ohms)	RATED DC CURRENT (mA)
19	± 25 %	100	0.05	500
26	± 25 %	100	0.05	500
31	± 25 %	100	0.05	500
50	± 25 %	100	0.10	600
60	± 25 %	100	0.10	600
70	± 25 %	100	0.10	600
80	± 25 %	100	0.20	400
90	± 25 %	100	0.20	400
100	± 25 %	100	0.20	400
120	± 25 %	100	0.20	400
150	± 25 %	100	0.20	300
200	± 25 %	100	0.20	300
300	± 25 %	100	0.30	300
500	± 25 %	100	0.30	200
600	± 25 %	100	0.30	200
800	± 25 %	100	0.30	200
1000	± 25 %	100	0.40	200
1200	± 25 %	100	0.40	100
1500	± 25 %	50	0.50	100
2000	± 25 %	30	0.50	100

PACKAGING OPTIONS

- Bulk: 1000 pieces per plastic bag
- Tape and Reel: Paper carrier tape, 3000 pieces per reel

DESCRIPTION

ILB-1206
MODEL

19 Ω
IMPEDANCE
VALUE

± 25 %
IMPEDANCE
TOLERANCE

ER
PACKAGE
CODE

e3
JEDEC LEAD
(Pb)-FREE STANDARD

GLOBAL PART NUMBER

I **L** **B**
PRODUCT FAMILY

1 **2** **0** **6**
SIZE

E **R**
PACKAGE
CODE

1 **9** **0**
IMPEDANCE
VALUE

V
IMPEDANCE
TOLERANCE

FEATURES

- High reliability
- Surface mountable
- Magnetically self shielded
- Nickel barrier plating virtually eliminates silver migration
- 100 % lead (Pb)-free and RoHS compliant



RoHS
COMPLIANT

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature: - 55 °C to + 125 °C

Thermal Shock: 300 cycles, - 40 °C to + 125 °C

Biased Humidity: 85 % RH at 85 °C, 1000 hours at full rated current


DIMENSIONS in inches [millimeters]

Dimensional Outline




A	B	C	D
0.126 ± 0.008 [3.20 ± 0.2]	0.063 ± 0.008 [1.6 ± 0.2]	0.02 ± 0.012 [0.5 ± 0.3]	0.043 ± 0.008 [1.1 ± 0.2]

Suggested Pad Layout




E	F	G	H
0.173 [4.4]	0.055 [1.4]	0.087 [2.2]	0.043 [1.1]

TAPE AND REEL SPECIFICATIONS in inches [millimeters]






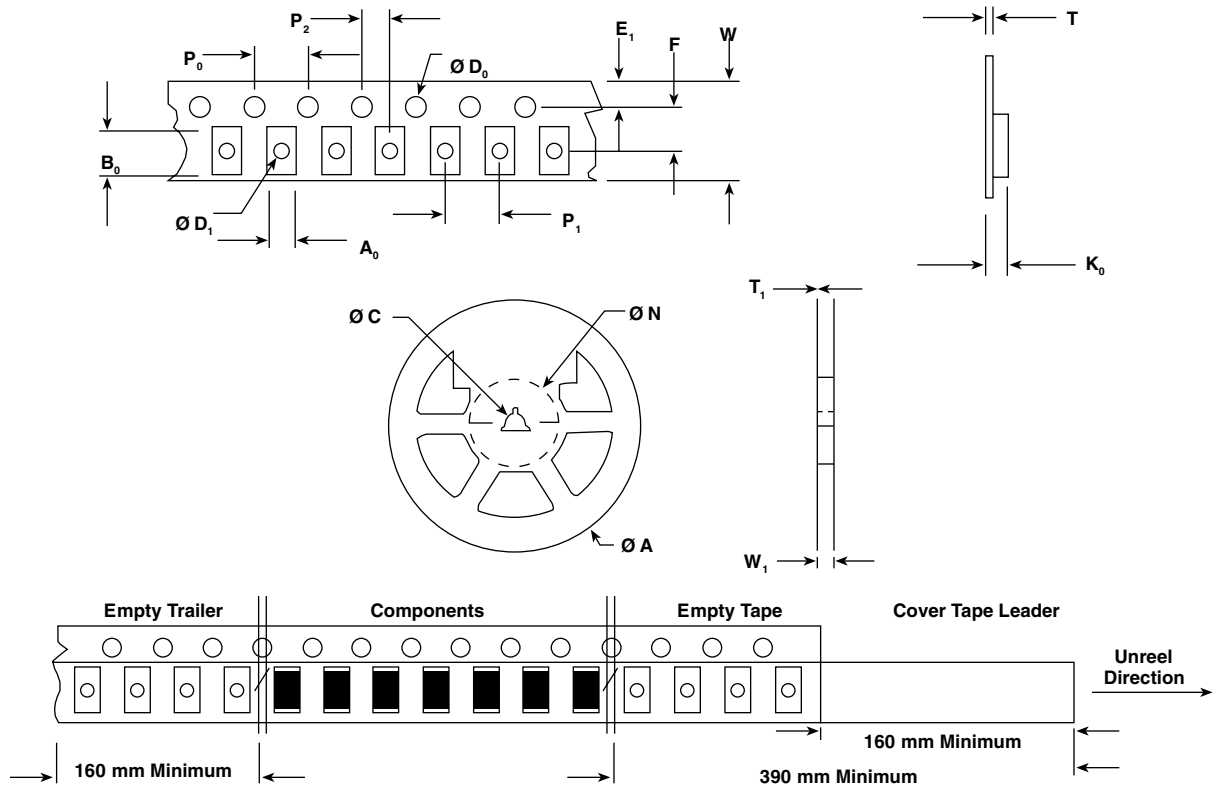


A₀	0.071 ± 0.008 [1.8 ± 0.2]	P₂	0.079 ± .002 [2.00 ± 0.05]
B₀	0.14 ± .006 [3.45 ± 0.15]	W	0.327 Max. [8.3 Max.]
D₀	0.059 + .005/- 0.000 [1.5 + 0.127]	T	0.009 ± .002 [0.2 ± 0.05]
D₁	0.039 Min. [1.0 Min.]	A	7.000 ± .079 [178 ± 2.0]
E₁	0.069 ± .004 [1.75 ± 0.1]	N	2.500 [63.5]
F	0.138 ± .002 [3.50 ± 0.05]	C	0.512 ± .020 [13.00 + 0.50]
K₀	0.049 ± .002 [1.24 ± 0.05]	W₁	0.315 + 0.059/- 0.00 [8.00 + 1.50]
P₀	0.157 ± .004 [4.00 ± 0.1]	T₁	0.079 ± .002 [2.00 ± 0.05]
P₁	0.157 ± .004 [4.00 ± 0.1]		


TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF Z, X AND R

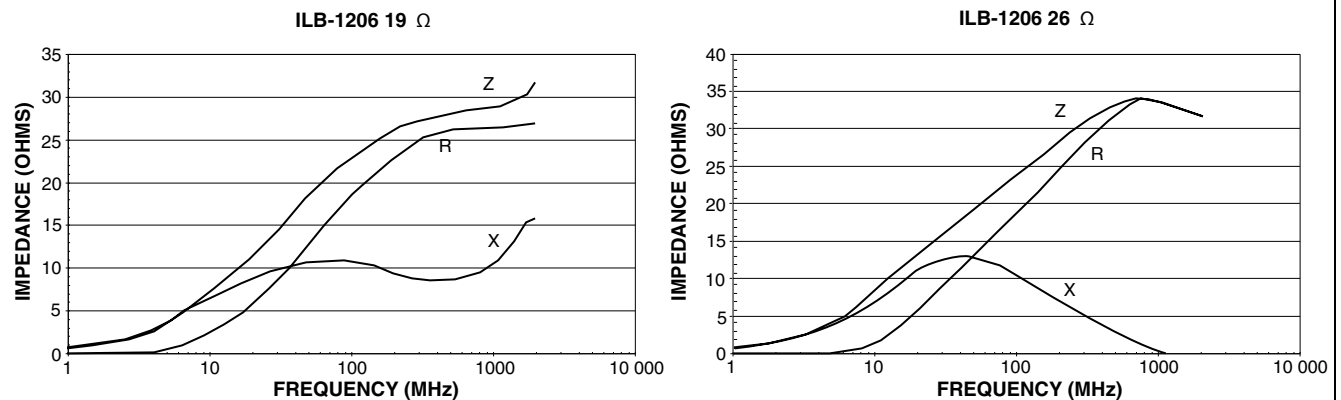

TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF Z, X AND R

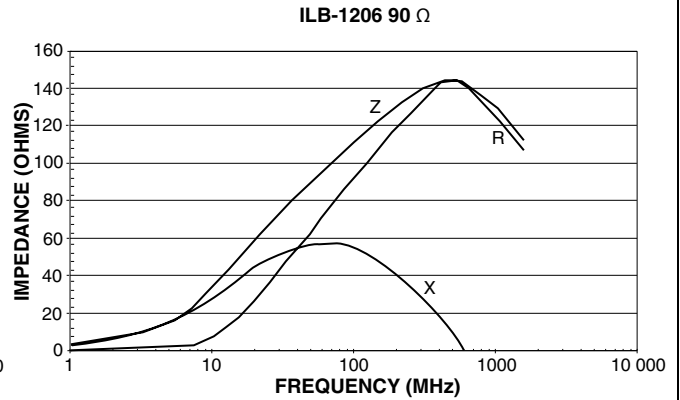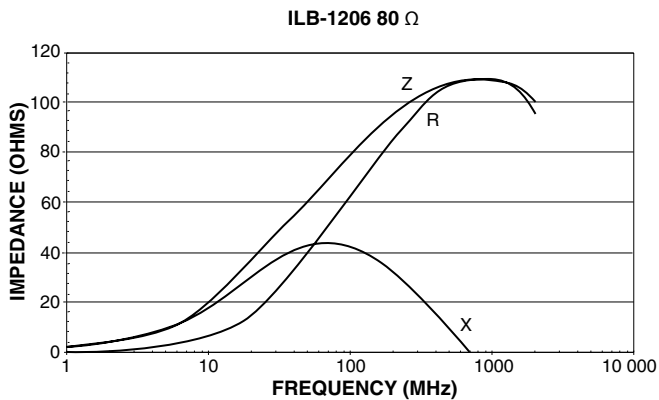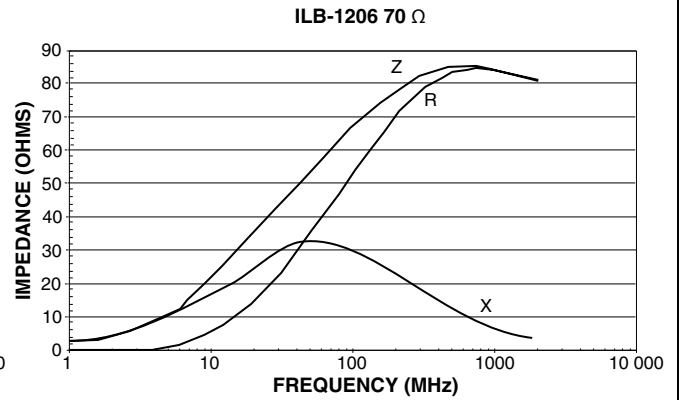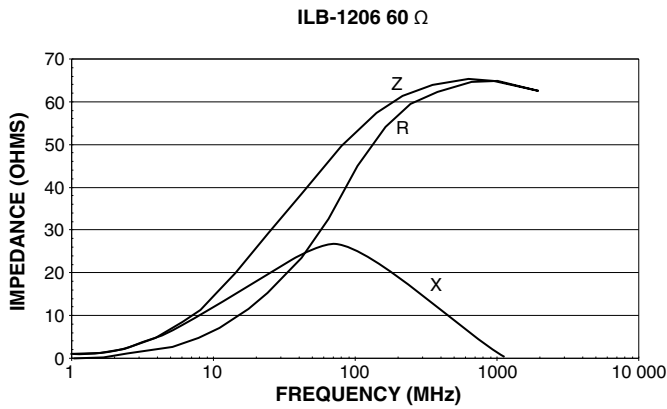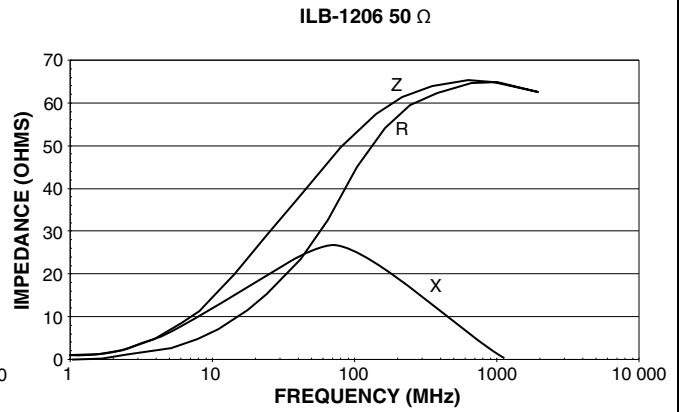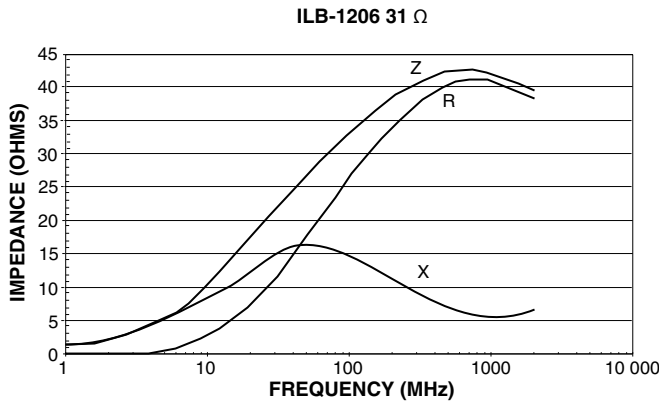


TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF Z, X AND R

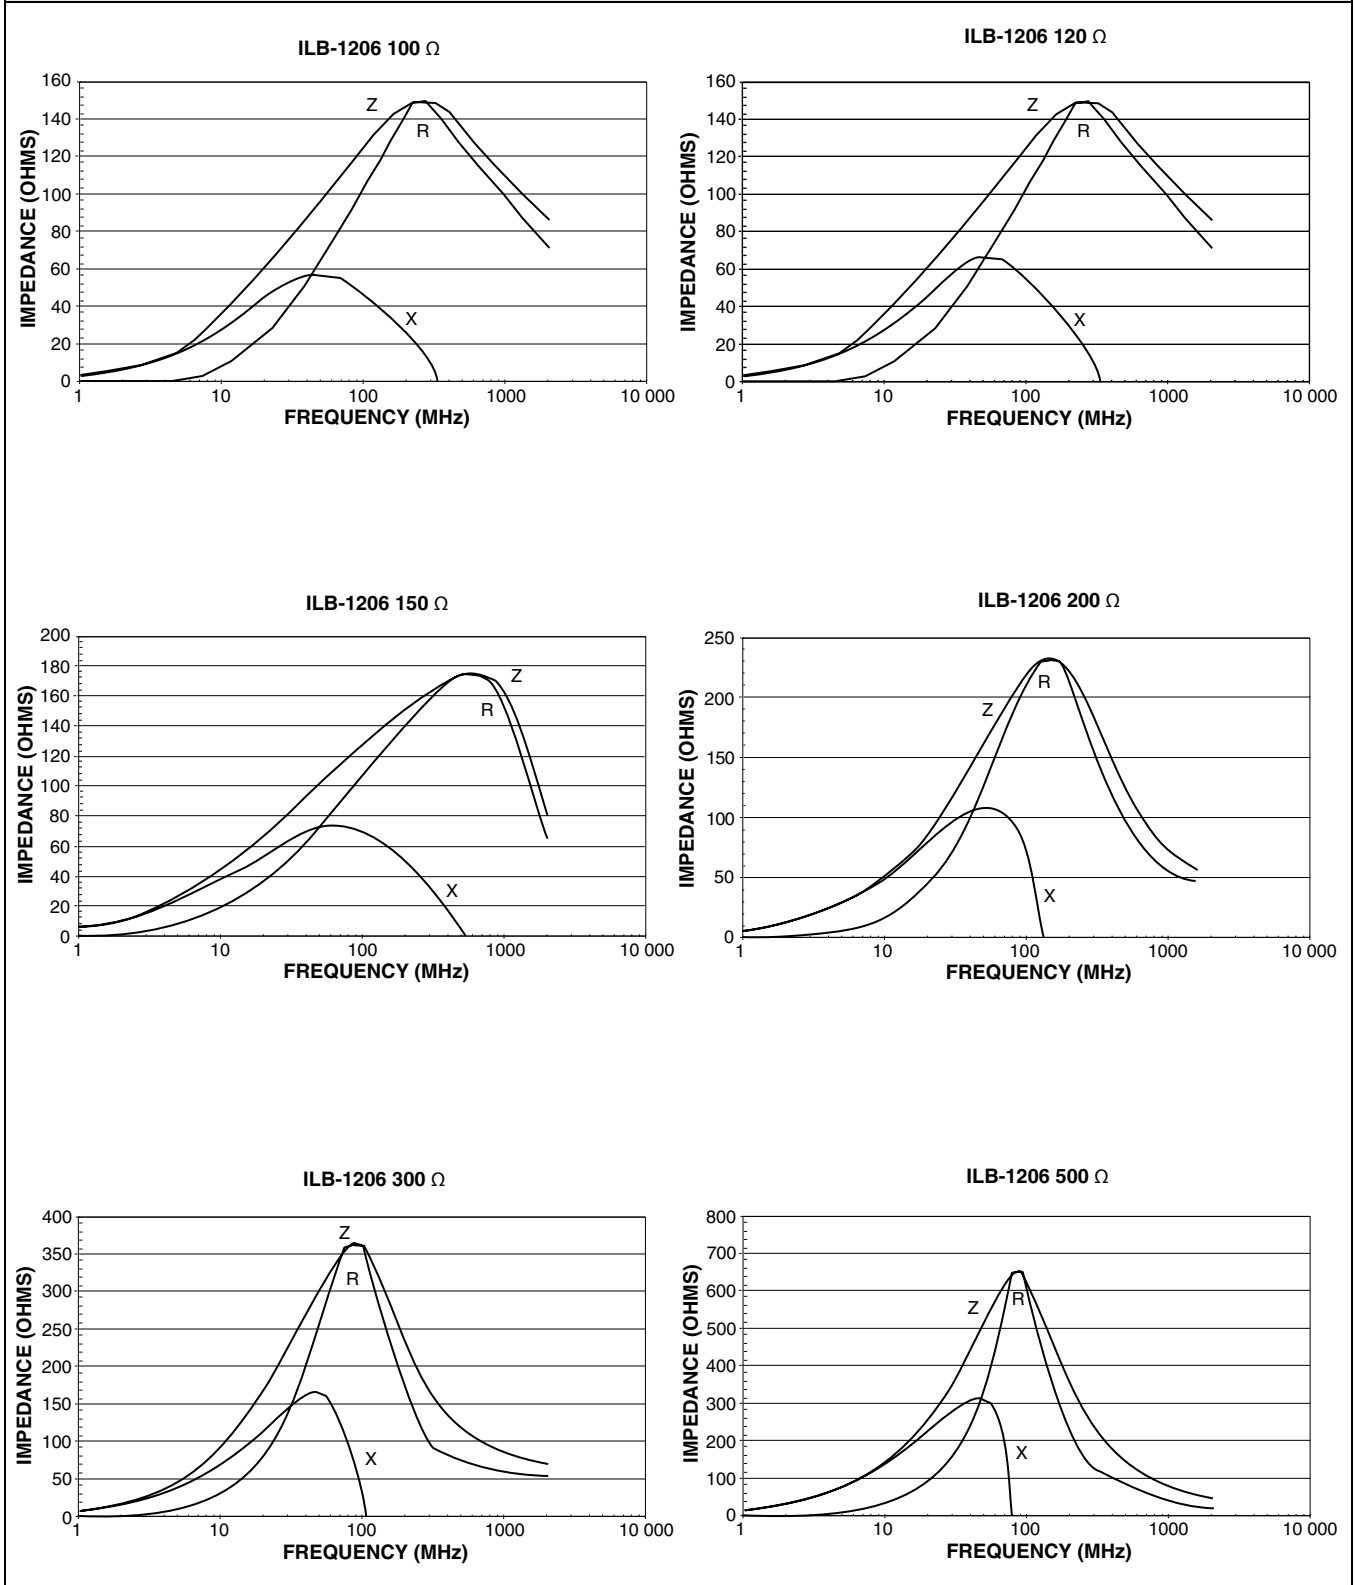


TYPICAL CURVES - FREQUENCY CHARACTERISTICS OF Z, X AND R


ILB-1206 600 Ω

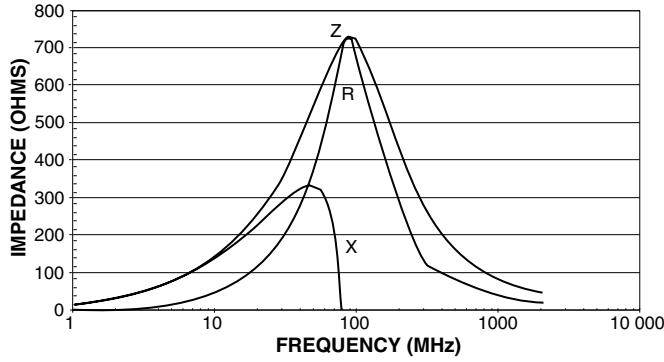


ILB-1206 800 Ω

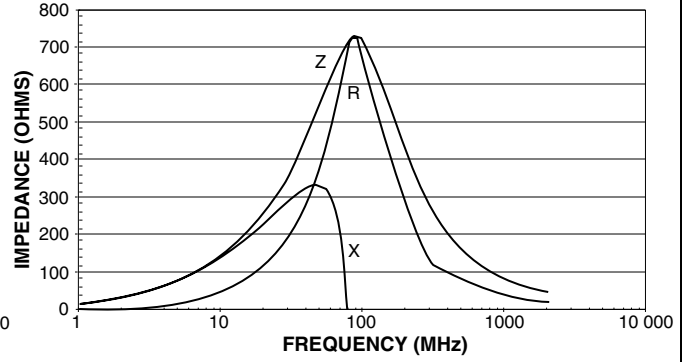


ILB-1206 1000 Ω

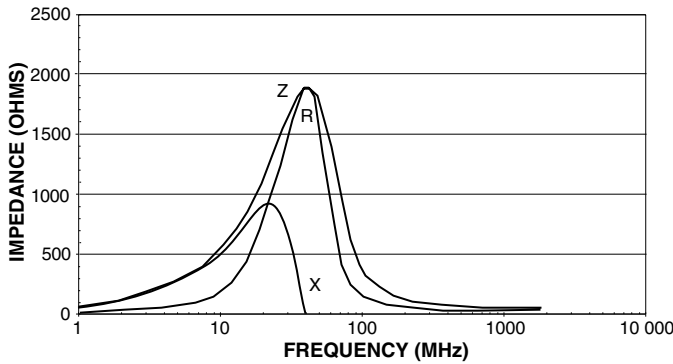


ILB-1206 1200 Ω

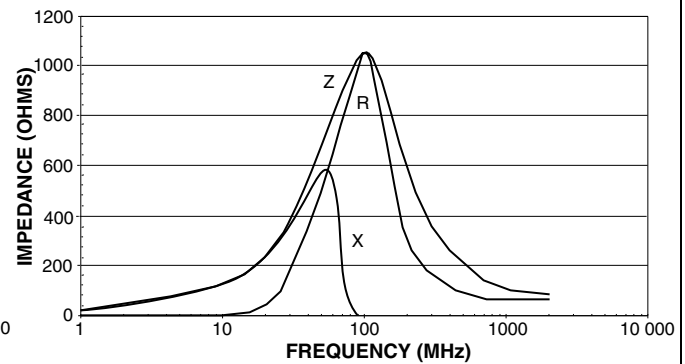

ILB-1206 1500 Ω

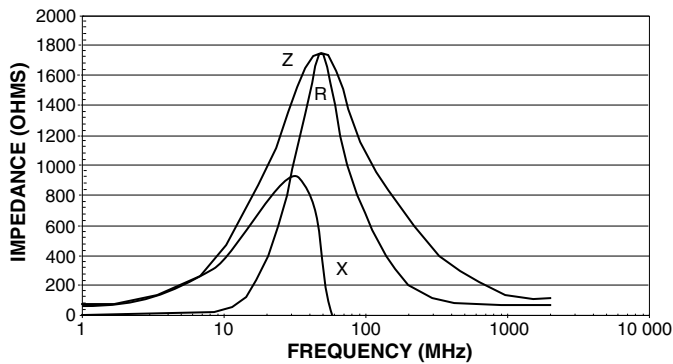

ILB-1206 2000 Ω

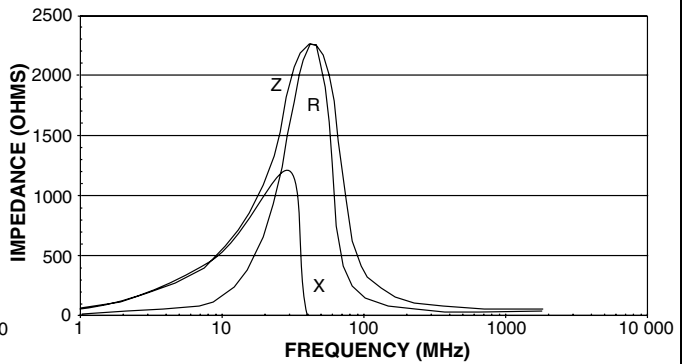



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [EMI Filters](#) / [EMI Suppression](#) category:

Click to view products by [Vishay](#) manufacturer:

Other Similar products are found below :

[CX0805MRX7R7BB473](#) [CZB1EGTTP700P](#) [CZB1JGTTD101P](#) [CZB1JGTTD151P](#) [CZB1JGTTD152P](#) [CZB1JGTTD601P](#)
[CZB2AFTTD800P](#) [CZB2AGTTD121P](#) [CZB2AGTTD601P](#) [CZB2BFTTE600P](#) [PE-0402FB121ST](#) [EMI0805R-11](#) [BMB1J1000LN2](#)
[BMB2A0430RS2](#) [BMB2A0470LN2](#) [ILAS1206ER102V](#) [SMB2.5-1TR](#) [CZB1EGTTP121P](#) [CZB1JGTTD102P](#) [CZB1JGTTD121P](#)
[CZB1JGTTD221P](#) [CZB2AGTTD301P](#) [CZB2BFTTE301P](#) [CZB2BFTTE601P](#) [4221R-1](#) [432703069121](#) [432703069351](#) [ILAS1206ER121V](#)
[4221R-2](#) [4221R-3](#) [4221R-4](#) [432703041941](#) [432703041971](#) [432703069131](#) [EMI0805R-120](#) [EMI0805R-2000](#) [EMI0805R-600](#) [NCB-](#)
[GH0402D121TR060F](#) [NCB-H1812D125TR150F](#) [CZB2AGTTD102P](#) [BMB2A0150AN1](#) [NCB0402P301TR005F](#) [NCB0805A121TR050F](#)
[NCB-H0805A102TR150F](#) [NCB0402P300TR030F](#) [NCB0402P601TR030F](#) [NCB-H0603R121TR300F](#) [NCB-H0805A220TR600F](#)
[432703069091](#) [CX0805MRX7R8BB223](#)