


# CERTUS Configurable Safety Module

CARLO GAVAZZI

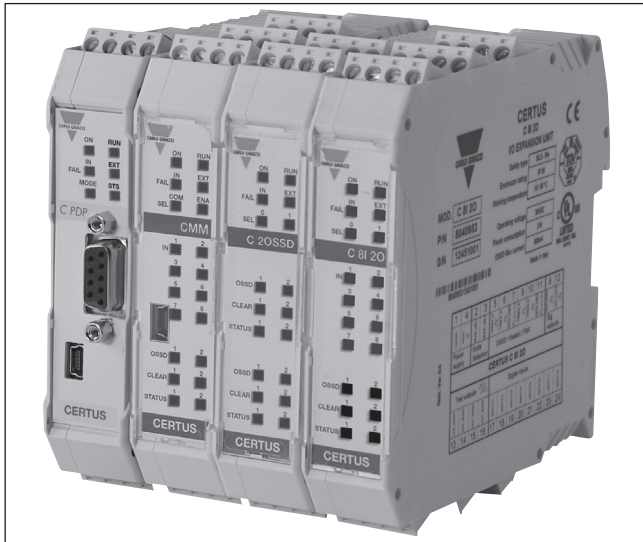

- Reduces the number of components (less footprint and wiring)
- Faster electrical cabinet construction
- Flexible, intuitive and quick logical configuration software
- Easy to set up tamper-proof safety systems
- Simplifies machine maintenance through the Configuration Memory Card, which can be used to transfer the configuration program to a new CERTUS in just a few simple steps
- Ideal for machine designers
- Certified to the highest safety levels: SIL +, SILCL 3, PLe, Cat.4
- Up to 128 inputs and 16 OSSD pairs
- Up to 14 expansion units in addition to the CMM Master, excluding relay modules
- Compact design: single module dimensions (W x H x D) 108 x 22.5 x 114.5

## Product Description

CERTUS is the new Carlo Gavazzi modular configurable safety system. This new safety device is capable of monitoring several safety photocells, emergency stops, safety mats, magnetic or mechanical switches, twohand controls etc.

Thanks to the new CERTUS modular structure, it is possible to adapt its I/O configuration and functionality to the demands of many different applications; making CERTUS a highly versatile and flexible safety system.

## Ordering Key

**C MM**

Model \_\_\_\_\_  
Type \_\_\_\_\_

## Type Selection

<b>CMM</b>	Programmable master unit
<b>C 8I2O</b>	I/O expansion unit
<b>C 8I - C 16I</b>	Input expansion unit
<b>C 12I - C 8TO</b>	I/O expansion unit
<b>C 2OSSD - C 4OSSD</b>	Output expansion unit
<b>C 2R - C 4R</b>	Guided contact relay output expansion unit.
<b>CBT</b>	Bus transfer expansion units

**Diagnostic and data communication family**  
C PDP, C DNET, C CAN, C EIP, C ECAT, C PFNET, C OMMS

**Speed monitoring family**  
C PSS, C ES1T, C ES2T, C ES1H, C ES2H, C ES1S, C ES2S

Expansion units for Diagnostics and Data Communication

Expansion units to monitor speed (PLe): zero, max and range, plus motion direction, rotation/translation

## General Data

<b>Max. number of inputs</b>	128
<b>Max. number of outputs</b>	16
<b>Max. number of expansion units</b>	14
<b>Max. number of expansion units of the same type</b>	4
<b>Rated voltage</b>	24VDC ± 20% Supply from class II (LVLE)

<b>Over voltage category</b>	II
<b>Digital Inputs</b>	PNP active high, according to EN 61131-2
<b>Digital outputs</b>	PNP active high 400mA@24VDC
<b>Response time Master</b>	10,6 to 12,6ms + TInput_filter

## General Data

CMM + 1 Expansion unit	11,8 to 26,5 + TInput_filter	<b>Max. length of connections</b>	100m
CMM + 2 Expansion units	12,8 to 28,7 + TInput_filter	<b>Operating temperature</b>	-10° to 55°C
CMM + 3 Expansion units	13,9 to 30,8 + TInput_filter	<b>Max. surrounding air temperature</b>	55°C
CMM + 4 Expansion units	15 to 33 + TInput_filter	<b>Storage temperature</b>	+20° to 85°C
CMM + 5 Expansion units	16 to 35 + TInput_filter	<b>Relative humidity</b>	10% to 95%
CMM + 6 Expansion units	17 to 37,3 + TInput_filter	<b>Description</b>	Electronic housing max 24 pole, with locking latch mounting.
CMM + 7 Expansion units	18,2 to 39,5 + TInput_filter	<b>Enclosure material</b>	Polyamide
CMM + 8 Expansion units	19,3 to 41,7 + TInput_filter	<b>Enclosure protection class</b>	IP20
CMM + 9 Expansion units	20,4 to 43,8 + TInput_filter	<b>Terminal blocks protection class</b>	IP2X
CMM + 10 Expansion units	21,5 to 46 + TInput_filter	<b>Fastening</b>	Quick coupling to DIN rail according to EN60715
CMM + 11 Expansion units	22,5 to 48,1 + TInput_filter	<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5
CMM + 12 Expansion units	23,6 to 50,3 + TInput_filter		
CMM + 13 Expansion units	24,7 to 52,5 + TInput_filter		
CMM + 14 Expansion units	25,8 to 56,4 + TInput_filter		
<b>Connection cable</b>	C.G. proprietary 5-pole bus		
<b>Connection cable cross section</b>	0,5 to 2,5 mm <sup>2</sup> / AWG 12 to 30 (solid/stranded)		

## Main Unit and Expansion Units Features

- **CMM stand alone main unit:**
  - 8 safety inputs, 2 OSSD pairs - 400mA output current - with separate EDM and Start/Restart, 4 test outputs and 2 programmable status outputs
  - Configurable via PC through USB interface
  - CMC (CERTUS Configuration Memory Card) slot for program storage (optional feature)
- **C 8I 20 expansion unit:**
  - 8 safety inputs, 2 OSSD pairs - 400mA output current - with separate EDM and Start/Restart, 4 test outputs and 2 programmable status outputs (same as CMM but no CPU).
- **C 8I and C 16I expansion units:**
  - 8 and 16 safety inputs, 4 test outputs.
- **C 12I 8TO expansion unit:**
  - 2 safety inputs, 8 test outputs - can control up to 4-wire safety mats.
- **C 2OSSD and C 4OSSD expansion units:**
  - 2 and 4 OSSD pairs - 400mA output current - with separate EDM and Start/Restart, 2/4 programmable status outputs.
- **C 2R and C 4R relay expansion units:**
  - 2 safety relays - 2 NO + 1 NC connectable to 1 OSSD pair.
- 4 safety relays - 4 NO + 2 NC connectable to 2 independent OSSD pairs.
- 2/4 safety relays with 6A 250VAC guided contacts.
- 1/2 NC contacts for External Device Monitoring (EDM).
- **C DDC Data and Diagnostic Communication expansion units for connection to the most common industrial Fieldbus system:**
  - C PDP - Profibus DP
  - C DNET - DeviceNet
  - C CAN - CANopen
  - C EIP - Ethernet IP
  - C ECAT - EtherCAT
  - C PFNET - PROFINET
  - C OMMS - Universal Serial Bus
- **CBT Bus transfer expansion unit, up to 50m length per connection. Maximum of 6 connections per system**
- **Speed Monitoring expansion units to monitor (PLe):**
  - Zero speed
  - Max speed
  - Speed range
  - C EIP - Ethernet IP
  - Motion direction; rotation / translation.

## Characteristic of the Output Circuit

<b>Excitation voltage</b>	17...31 VDC	<b>Maximum switchable voltage (AC)</b>	400VAC
<b>Minimum switchable voltage</b>	10VDC	<b>Maximum switchable current</b>	6A
<b>Minimum switchable current</b>	20 mA	<b>Response time</b>	12ms
<b>Maximum switchable voltage (DC)</b>	250VDC	<b>Mechanical life of contacts</b>	> 20 x 10 <sup>6</sup>

## CERTUS C 8I 20



- I/O expansion unit
- 8 digital inputs
- 2 OSSD pairs with 400mA output current
- 4 test outputs for sensor monitoring
- 2 programmable digital signal outputs
- 2 inputs for Start/Restart interlock and external device monitoring (EDM)
- 24 terminal points in 22.5 mm
- Connectable to CMM via SCC proprietary bus

## General Data

<b>Safety Level</b>	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 PLe - Cat. 4 according to ISO 13849-1.
<b>Safety inputs</b>	8
<b>Safety outputs</b>	2 pairs PNP - 400mA
<b>Programmable signal outputs</b>	2 PNP - 400mA
<b>Test Outputs</b>	4
<b>Start/Restart inputs and external device monitoring (EDM)</b>	24VDC ± 20% Supply from class II (LVLE)

<b>LED signal</b>	Input/output status and fault diagnostics.
<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)
<b>Electrical connection</b>	Removable terminal blocks, screw contact.
<b>Operating temperature</b>	-10° to 55°C
<b>Storage temperature</b>	-20° to 85°C
<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm

## CERTUS C 8I - C 16I



- Input expansion unit:
  - C 8I: 8 digital inputs
  - C 16I: 16 digital inputs
- 4 test outputs for sensor monitoring
- 16 (C 8I) / 24 (C 16I) terminal points in 22.5 mm
- Connectable to CMM via SCC proprietary bus

## General Data

<b>Safety Level</b>	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 PLe - Cat. 4 according to ISO 13849-1.
<b>Safety inputs</b>	8 - 16
<b>Test Outputs</b>	4
<b>LED signal</b>	Input/output status and fault diagnostics.
<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)

<b>Electrical connection</b>	Removable terminal blocks, screw contact.
<b>Operating temperature</b>	-10° to 55°C
<b>Storage temperature</b>	-20° to 85°C
<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm

## CERTUS C 12I 8TO



- Input expansion unit: 12 digital inputs
- 8 test outputs for sensor monitoring: can control up to four 4-wire safety mats
- 24 terminal points in 22.5 mm
- Connectable to CMM via SCC proprietary bus

### General Data

<b>Safety Level</b>	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 PLe - Cat. 4 according to ISO 13849-1.	<b>Electrical connection</b>	Removable terminal blocks, screw contact.
<b>Safety inputs</b>	12	<b>Operating temperature</b>	-10° to 55°C
<b>Test Outputs</b>	8	<b>Storage temperature</b>	-20° to 85°C
<b>LED signal</b>	Input/output status and fault diagnostics.	<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)	<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
		<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm

## CERTUS C 2OSSD and C 4OSSD



- Output expansion units:
  - C 2OSSD - 2 OSSD pairs
  - C 4OSSD - 4 OSSD pairs
- Output current - 400mA
- 2/4 programmable digital signal outputs
- 2/4 inputs for Start/Restart interlock and external device monitoring (EDM)
- 16/24 terminal points in 22.5 mm
- Connectable to CMM via SCC proprietary bus

### General Data

<b>Safety Level</b>	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 PLe - Cat. 4 according to ISO 13849-1.	<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)
<b>Safety outputs</b>	2/4 pairs PNP - 400mA	<b>Electrical connection</b>	Removable terminal blocks, screw contact.
<b>Programmable signal outputs</b>	2/4 PNP - 400mA	<b>Operating temperature</b>	-10° to 55°C
<b>Start/Restart inputs and external device monitoring (EDM)</b>	2/4	<b>Storage temperature</b>	-20° to 85°C
<b>LED signal</b>	Input/output status and fault diagnostics.	<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
		<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
		<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm

## CERTUS C 2R and C 4R



- Safety relay modules
  - C 2R: 2 relays - 2 NO + 1 NC connectable to 1 OSSD pair
  - C 4R: 4 relays - 4 NO + 2 NC connectable to 2 independent OSSD pairs
- 2/4 safety relays with 6A 250VAC guided contacts
- 1/2 NC contacts for External Device Monitoring (EDM)
- 16/24 terminal points in 22.5mm

## General Data

<b>Safety Level</b>	SIL 3 - SILCL 3 according to IEC 61508 - IEC 62061 PLe - Cat. 4 according to ISO 13849-1.	<b>Electrical connection</b>	Removable terminal blocks, screw contact.
<b>Safety relay outputs</b>	2 NO + 1 NC 6A 250VAC 4 NO + 2 NC 6A 250VAC	<b>Operating temperature</b>	-10° to 55°C
<b>Programmable signal outputs</b>	2 PNP - 400mA	<b>Storage temperature</b>	-20° to 85°C
<b>LED signal</b>	Output status	<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)	<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
		<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm

## CERTUS C DDC



- Expansion unit for the connection to the most common industrial Fieldbus system for diagnostic and data communication.
  - C PDP - Profibus DP
  - C DNET - DeviceNet
  - C CAN - CANopen
  - C EIP - Ethernet IP
  - C ECAT - EtherCAT
  - C PFNET - PROFINET
  - C OMMS - Universal Serial Bus

## General Data

<b>LED signal</b>	Diagnostic	<b>Storage temperature</b>	-20° to 85°C
<b>Power supply</b>	24VDC ± 20% Supply from class II (LVLE)	<b>Protection rating</b>	IP 20 for housing IP 2X for terminal blocks
<b>Electrical connection</b>	Removable terminal blocks, screw contact.	<b>Fastening</b>	DIN Rail fastening according to EN 60715 standard
<b>Operating temperature</b>	-10° to 55°C	<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm


## CERTUS Bus Transfer (CBT)

CERTUS CBT is an expansion module which allows the connection of the CMM with other expansion unit modules placed at great distances. Up to 50m per connection. Maximum 6 connections/system.


Through the use of a shielded cable (compatible with RS485 standard) two CBT modules placed at the desired distance can be linked together.

Each CBT2 has two independent connection channel; the connection of two CBT2 can be performed by wiring a channel of your choice.

CBT1 has only one channel and must be connected as the first or last module.

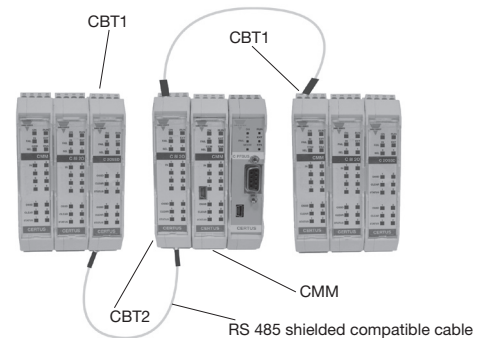


## Electrical Connection

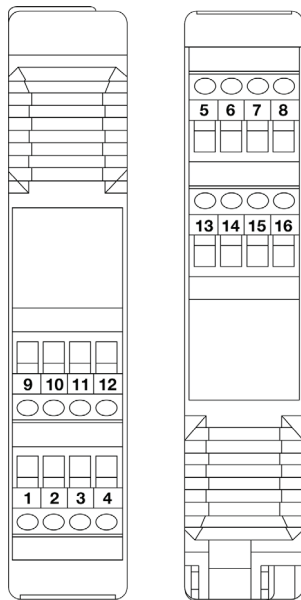

TERMINAL	SIGNAL		TYPE
	CBT1	CBT2	
1	24VDC	24VDC	Power supply 24VDC
2	n.c.	n.c.	-
3		BRAIDING CH2	-
4	0VDC	n.c.	Power supply 24VDC
5	n.c.	n.c.	-
6	n.c.	n.c.	-
7	<b>BRAIDING CH1</b>	<b>n.c.</b>	-
8	n.c.		-
9	n.c.	CH 2 - A	Be sure to connect to the corresponding terminals of the remote CBT: A <-> A B <-> B C <-> C D <-> D BRAIDING <-> BRAIDING You can also connect CH1 with CH2 (CBT2)
10	n.c.	CH 2 - B	
11	n.c.	CH 2 - C	
12	n.c.	CH 2 - D	
13	<b>CH 1 - A</b>	<b>CH 1 - A</b>	
14	<b>CH 1 - B</b>	<b>CH 1 - B</b>	
15	<b>CH 1 - C</b>	<b>CH 1 - C</b>	
16	<b>CH 1 - D</b>	<b>CH 1 - D</b>	

The CERTUS system units are provided with terminal blocks for the electrical connections. Each unit can have 16 or 24 terminals. Each unit also has a rear panel plug-in connector (for communication with the master and with the other expansion units). The C 2R and C 4R are connected via terminal blocks only.

## Signals

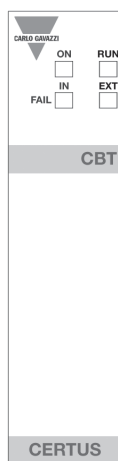


MEANING	LED			
	ON (GREEN)	RUN (GREEN)	IN FAIL (RED)	EXT FAIL (RED)
<b>INITIAL TEST</b>	ON	ON	ON	ON
<b>NORMAL OPERATION</b>	ON	OFF > BLINKING > ON	OFF Operation OK	OFF Operation OK
<b>INTERNAL FAULT DETECTED (Not recoverable. Restart the system)</b>	ON	OFF	BLINKING Follows CMM error codification (see CERTUS MANUAL)	OFF
<b>FAULT DETECTED ON TERMINAL CONNECTION (Recoverable)</b>	ON	OFF	OFF	ON

## Technical Data

<b>Interface module</b>	CERTUS CBT1 CERTUS CBT2	<b>Max length of connection</b>	<100m (each section)
<b>Connection channels</b>		<b>Operating temperature</b>	-10° to 55°C
CERTUS CBT1	1	<b>Storage temperature</b>	-20° to 85°C
CERTUS MC2	2	<b>Relative humidity</b>	10% to 95%
<b>Connection</b>	SCC 5-poles rear connector Terminal block 16 poles.	<b>Dimensions (H x W x D)</b>	108 x 22.5 x 114.5 mm
<b>Modules connections</b>	Max. number of connectable CBT=6. The possible bus module present in the system can be only allocated close to the first remote CBT or to CMM directly.		


## CERTUS Safety Speed Monitoring (C PSS, C ES1 and C ES2)

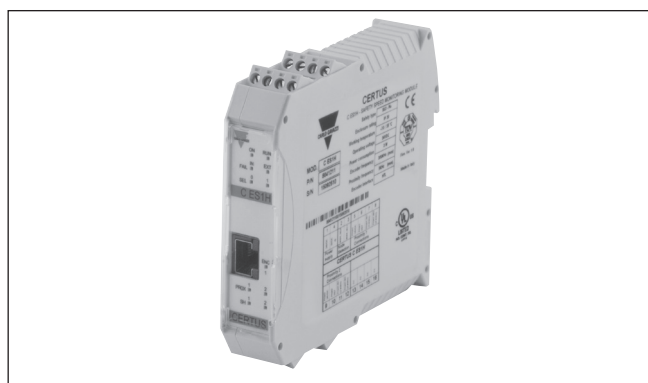

Speed Monitoring expansion units to monitor (PLe):


- Zero speed
- Max speed
- Speed range
- Motion direction; rotation / translation
- Allow the configuration of up to 4 speed thresholds for each logic output (axis). Each unit integrates 2 configurable logic outputs being capable to control up to 2 independent axes. RJ45 for encoder connections (1 of CES1, CES2 of 2) and terminal blocks for connection of proximity (up to 2 proximity switches per module).
- Inputs frequency: Encoder up to 500 KHz (300 KHz for HTL); Proximity up to 5 KHz.

## Electrical Connection

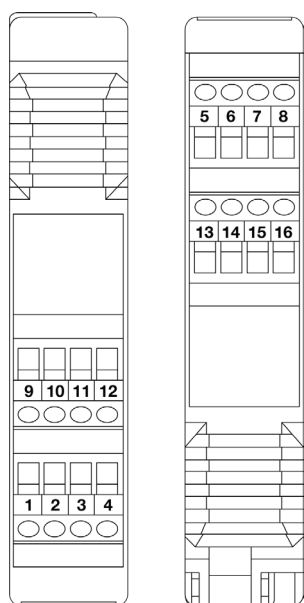

PIN	SIGNAL	IN / OUT	FUNCTION
1	24V	OUT	24VDC Power supply
2	NODE_SEL0	OUT	Node selection
3	NODE_SEL0	OUT	
4	GND	OUT	0VDC Power supply
5	PROXI1_24V	OUT	PROXIMITY 1 connections
6	PROXI_1REF	OUT	
7	PROXI1 IN1 (3 wires)	IN	
8	PROXI1 IN2 (4 wires)	IN	
9	PROXI2_24V	OUT	PROXIMITY 2 connections
10	PROXI2_REF	OUT	
11	PROXI2 IN1 (3 wires)	IN	
12	PROXI2 IN2 (4 wires)	IN	
13	N.C		Not connected
14	N.C		
15	N.C		
16	N.C		

## Encoder Connection with RJ45 Connector (C ES1, C ES2)

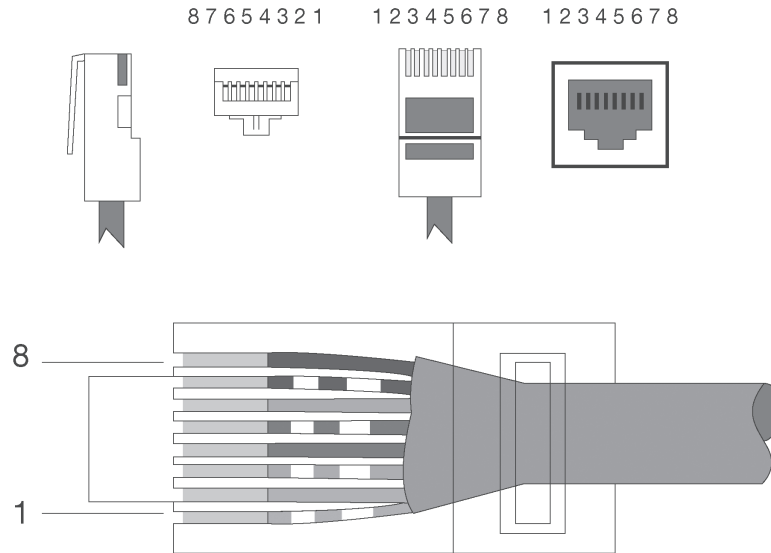

PIN		COLOR	MVT	MVH	MVS
1	INPUT	BROWN	5VDC	N.C.	N.C.
2		WHITE	EXT_0V	EXT_0V	EXT_0V
3		BLUE	N.C.	N.C.	N.C.
4		GREEN	A	A	A
5		YELLOW	A	A	A
6		RED	N.C.	N.C.	N.C.
7		GREY	B	B	B
8		PINK	B	B	B

ON	RUN	IN FAIL	EXT FAIL	SEL	ENC	PROX	SH
GREEN	GREEN	RED	RED	ORANGE	YELLOW	YELLOW	YELLOW
ON Module turned on	OFF the module waits for the first CMM	OFF Operation OK	OFF Operation OK	Brings back the table of signals NODE/SEL0/1	ON Encoder connected and operative	ON Proximity connected and operative	OFF axis normal speed range
	BLINKING configuration does not require INPUT or OUTPUT from module				BLINKING Encoder not connected but requested from the configuration	BLINK 0,5s Proximity not connected but requested from the configuration	BLINKING axis in over-speed
	ON configuration requires INPUT or OUTPUT from module				BLINKING Encoder not connected but requested from the configuration	BLINK 2 s. Proximity malfunction	ON axis in stand still



## Technical Data Concerning Safety



	C PSS	C ES1	C ES2
Device lifetime	20 years		
Safety level	SIL 3 - PLe - Category 4		
PFHd	5,98E-09	7,08E-09 (TTL)	8,18E-09 (TTL)
		7,93E-09 (SIN/COS)	9,89E-09 (SIN/COS)
		6,70E-09 (HTL)	7,42E-09 (HTL)
MTTFd	500,33	337,72 (TTL)	254,88 (TTL)
		269,49 (SIN/COS)	184,41 (SIN/COS)
		380,05 (HTL)	306,40 (HTL)
DCavg	99,0%		

	C PSS	C ES1	C ES2
Rated voltage	-		
Power dissipation max	3W		
Encoder interface	TTL (MV1T - MV2T models) HTL (MV1H - MV2H models)		
Encoder input signals electrically insulated in accordance with	Rated insulation voltage 250V Overvoltage category II Rated impulsewithstand voltage 4.00kv		
Max number of axes	2		
Max number of encoders	0	1	2
max encoder frequency	-	500KHz (HTL: 300KHz)	
Encoder connections	-	RJ45 connector	
Max number of proximity	2		
Max proximity frequency	5KHz		
Proximity connections	Terminal blocks		
Proximity type	PNP/NPN -3/4 wires		
CMM connections	Via MSC Bus		
Operating temperature	-10 ÷ 55°C		
Storage temperature	-20 ÷ 85°C		
Relative humidity max	95%		
Dimensions (H x L x P)	108 x 22,5 x 114,5		

## Configuration Memory Card (CMC)



CMC is a memory card supplied as an accessory to save the CERTUS configuration data for transfer to a new CMM without using a computer.

- Each time CMC is used, carefully check that the chosen configuration is the one that was planned for that particular system.
- If the file inside the CMC does not match the one contained in the CMM, the CMC will overwrite the CMM erasing definitely the old data. **WARNING: ALL DATA PREVIOUSLY CONTAINED IN THE CMM (PASSWORD INCLUDED) WILL BE OVERWRITTEN.**
- Perform again a fully functional test of the system composed of CERTUS plus all devices connected to it.


## Technical Data

<b>Interface module</b>	CERTUS CMM	<b>Storage temperature</b>	-20° to 85°C
<b>Connections</b>	8 poles connector	<b>Relative humidity</b>	10% to 95%
<b>Operating temperature</b>	-10° to 55°C	<b>Dimensions (H x W x D)</b>	21.5 x 2 x 18mm

## CERTUS USB Connection Cable (C USB)

C USB is an interconnection cable necessary to connect CERTUS CMM to the PC with the CCS (CERTUS configuration software) installed.

- Connect the C USB cable only with CCS software installed: the driver necessary to the identification of CMM is contained in the software.
- The cable has two connectors:
  - 1) type "A" USB connector for the connection to the computer
  - 2) type "B" mini-USB connector for the connection to the CMM module.
- The length of the C USB is 1.8m=> DO NOT USE OTHER CABLES OR LONGER THAN 3m.  
The configuration software automatically recognises a connected CMM module and reports it on the status bar.

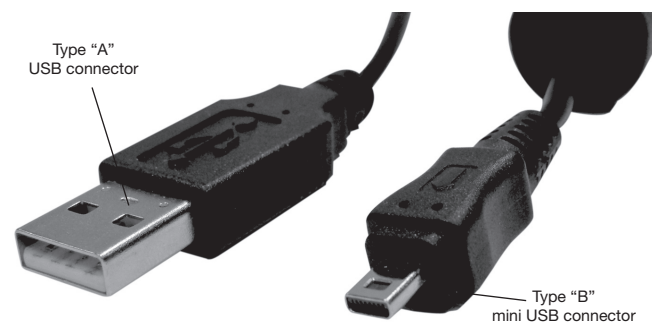

## Technical Data

<b>Nominal current (max)</b>	100mA
<b>Nominal voltage</b>	5VDC
<b>Connections</b>	1 connector type "A" 1 connector type "B"
<b>Length</b>	1.8m

## CERTUS Configuration Software (CCS)




The CERTUS Configuration Software (CCS) is a userfriendly configuration tool to program the CMM in just a few simple steps. By clicking on the functional icons it is easy to “Drag&Drop” configurable safety functions.

The accurate functional test incorporated in the CCS, immediately detects potential configuration errors. This also guarantees that configuration errors do not lead to an unsafe situation and valuable time is not lost during machine commissioning.


In addition, the multi-level password management of CCS gives further security against non-authorized access to the configuration software. Through the MONITOR I/O feature is possible to perform a real time monitoring of the I/Os status and diagnostic of a working CERTUS system.

## CERTUS Safety Communication Connector (SCC)

The SCC is a 5 poles connector that permits the interconnection between the CERTUS modules.

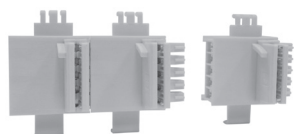

1. Connect the same number of “SCC” 5-pole rear panel connectors as the number of units to be installed (except for the relays modules that do not need this connector).

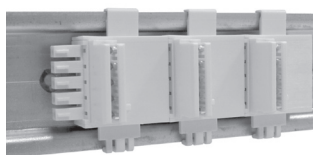

2. Fix the train of connectors to the DIN rail: (hooking them at the top first).  
**THE FEMALE CONNECTOR MUST BE ON THE LEFT (FRONT VIEW).**




3. Fasten the units to the rail, arranging the contacts on the base of the unit on the respective connector.
4. Press the unit gently until it snaps into place.

## Technical Data

Connections	5 poles	Relative humidity	10% to 95%
Operating temperature	-10° to 55°C	Dimensions (H x W x D)	36.5 x 29.2 x 20.5
Storage temperature	-20° to 85°C	Weight	5.2g

### Dimensions

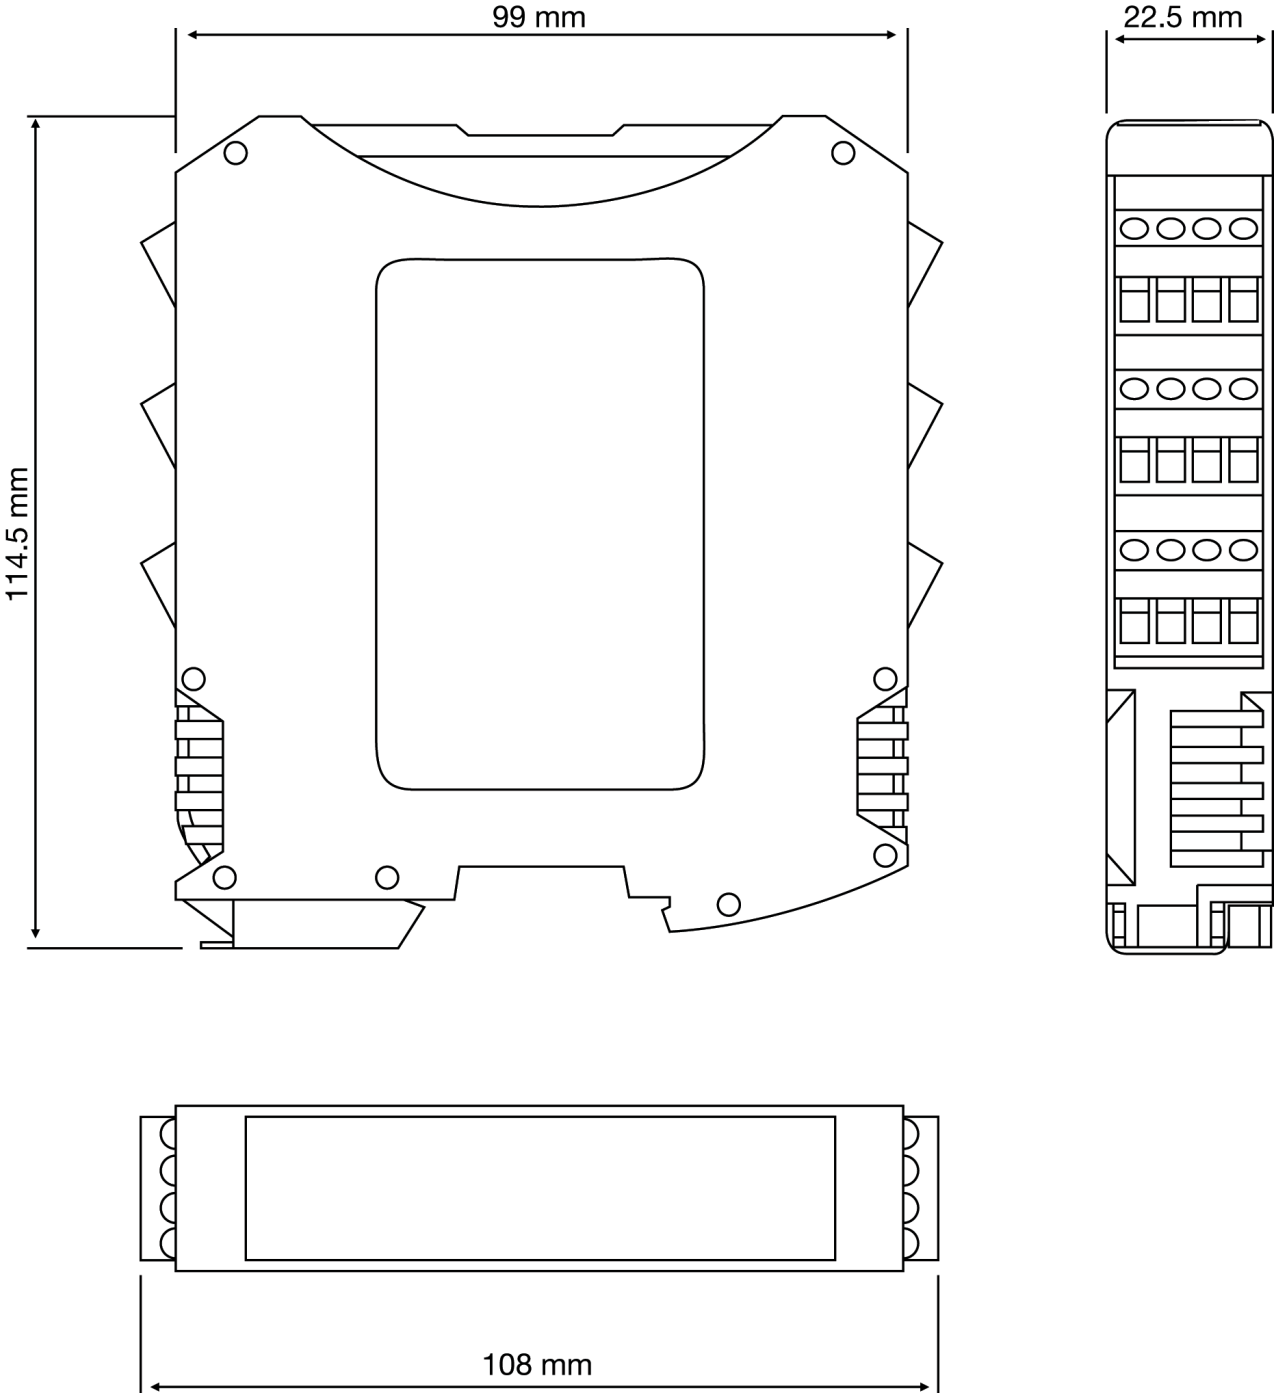

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Carlo Gavazzi](#) manufacturer:*

Other Similar products are found below :

[70L-OAC-L](#) [G21960000700](#) [G34960002700](#) [G88104401](#) [IDC-5B](#) [OACU](#) [C4SWOUT](#) [FC6A-T32K3](#) [SNAP-OAC5MA](#) [FC6A-N16B3](#)  
[FC6A-N32B3](#) [FC6A-T16P3](#) [G3TAOD201SDC24](#) [PB32HQ](#) [PB16T](#) [PB8](#) [PB8H](#) [C200H-OD211](#) [GT1-AD04CST](#) [GT1-DA04](#) [70GRCQ24-](#)  
[HS](#) [M-OAC5](#) [G4OAC24AMA](#) [2736505](#) [6202](#) [6402](#) [IL MOD BK DI8 DO4-PAC](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-N08A11](#) [FC6A-M24BR1](#)  
[FC6A-K4A1](#) [FC6A-T32P3](#) [9-1393028-2](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [WISE-4050/LAN-B](#) [WISE-S614T-A](#) [ADAM-4068-C](#)  
[56475](#) [ADAM-4017+-F](#) [ADAM-4118-C](#) [AMAX-4856-B](#) [WISE-4050-B](#) [ADAM-4051-C](#) [ADAM-4053-F](#) [GT1-AD08MX](#) [TM5SDO6TBFS](#)  
[70Q3446](#)