





REV	E.C.N. NO.	CONTENT	CHK	DATE
V0.0		ORIGINAL		12.11.17
V1.0				

NOTES:

1. Rating:300V 20A(UL/VDE);
2. Insulation Withstands Voltage:AC2000V/MIN;
3. Insulation Resistance:500MΩ or more at DC500V;
4. Using Temperature Range:-40°C--+105°C;
5. Screw Torque Value:0.4N.m;
6. Suitable Electric Wire:12-24AWG(UL),0.34-2.5mm²(VDE);
7. RoHS Compliance;
8. Stripping Length:7-8mm;
9. "★" is critical dimension to be controlled.

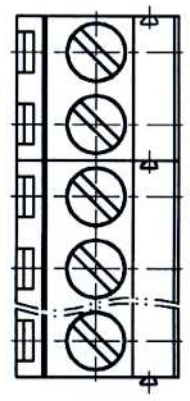

PCB LAYOUT
S=2:1

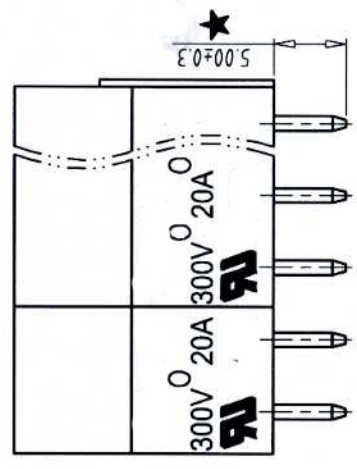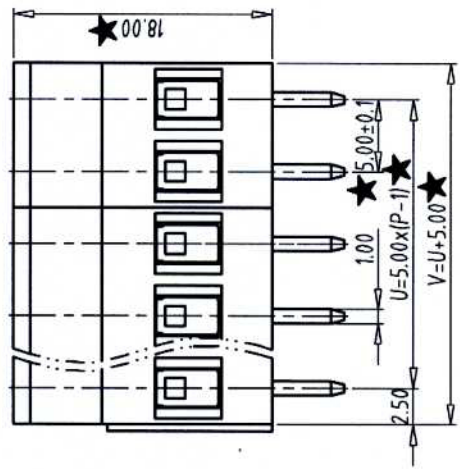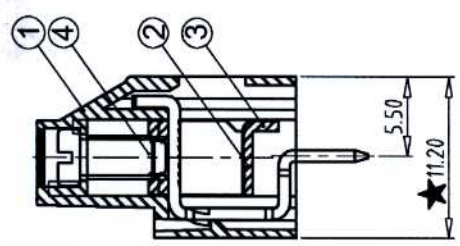

DIM	Total Pitch Tolerances		Nominal dimension range																		
	over	under	0	30	53	70	90	115	150	200	250	300	320	350	400	450	500	550	600	650	
P	±0.18	+0.20	±0.25	±0.3	±0.35	±0.4	±0.45	±0.5	±0.55	±0.6	±0.65	±0.7	±0.75	±0.8	±0.85	±0.9	±0.95	±1.0	±1.05	±1.1	±1.15
U	±0.18	+0.20	±0.25	±0.3	±0.35	±0.4	±0.45	±0.5	±0.55	±0.6	±0.65	±0.7	±0.75	±0.8	±0.85	±0.9	±0.95	±1.0	±1.05	±1.1	±1.15
V	±0.18	+0.20	±0.25	±0.3	±0.35	±0.4	±0.45	±0.5	±0.55	±0.6	±0.65	±0.7	±0.75	±0.8	±0.85	±0.9	±0.95	±1.0	±1.05	±1.1	±1.15

4	SCREW	P	STEEL	M3/Zn Plated	
3	SOLDERPIN	P	COPPER	Tin Plated	
2	BLOCK	P	STEEL	Zn Plated	
1	HOUSING	/	PA66(V0)	GREEN	
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DATE	DATE	UNITS	MM	SHEET/OF
CHK	DATE	DATE	SCALE	2:1	A4
APP.	DATE	DATE	NAME	20.700M-XX-P	
					DWGNO.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for imo manufacturer:

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [LDC18RRS](#) [SFSYE0111](#) [21.1500M/6-E](#) [20.3304M/2-E](#)
[21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#) [MSSTC11DA06](#) [20.2500M/4-E](#)
[20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-SL-12VDC](#)
[QYE21XXF24DC](#) [20.920M/5-E](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [MC10N-S-10110AC](#) [21.95MV/3](#) [MB09-S-1024](#) [MA05-S-](#)
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [SRGA-1A-SL-24VDC](#) [21.1500M/3-E](#) [21.95MHF/6-E](#) [20.95MV/2-E](#)
[20.155MV/4-E](#) [ER2.5BEIGE](#) [20.950M/2-E](#) [MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#)