

Energy Management Energy Analyzer Type EM11 DIN



• Other versions available (not certified, option X): see “how to order” on the next page

- Class 1 (kWh) according to EN62053-21
- Class B (kWh) according to EN50470-3
- Class 2 (kvarh) according to EN62053-23
- Accuracy ± 0.5 RDG (current/voltage)
- Energy analyzer
- Instantaneous variables readout: 4 DGT
- Energies readout: 6 DGT
- Instantaneous variables: V, A, W, Wdmd, Wdmd max, var, PF, Hz
- Single phase variables: VLL, VLN, A, VA, W, var, PF
- Energy measurements: total kWh and kvarh
- TRMS measurements of distorted sine waves (voltages/currents)
- Self power supply
- Dimensions: 1-DIN module
- Protection degree (front): IP40
- 1 pulse output on request
- 1 alarm output on request
- Certified according to MID Directive (option PF only): see “how to order” below

Product Description

One-phase energy analyzer with built-in configuration push button and LCD data displaying; particularly indicated for active and reactive energy metering and for cost allocation. Housing for DIN-rail mounting, IP40 (front) protection degree. Direct connection up to


32A. Moreover the meter can be provided with either pulse output proportional to the active energy being measured or alarm control on the available instantaneous variables.



Certified according to MID Directive, Module B and Module D of Annex II, for legal metrology relevant to active electrical energy meters (see Annex V, MI003, of MID). Can be used for fiscal (legal) metrology.


How to order

EM11 DIN AV8 1 X O1 PF

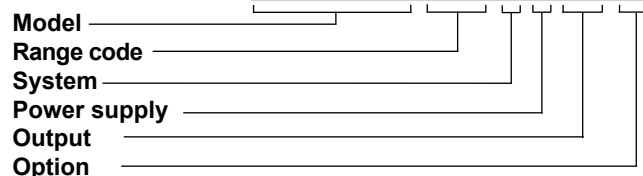

Type Selection

| Range code | System | Power supply | Option |
|--|---|--|--|
| AV8: 230V _{LN} AC - 5(32)A (direct connection) | 1: 1-phase | X: Self power supply (from 48 to 62Hz). The instrument works on the range from -20% to +20% of the measuring input nominal voltage. | PF: Certified according to MID Directive. Can be used for fiscal (legal) metrology. |
| | Output | | |
| | O1: Pulse type (open collector output) | | |

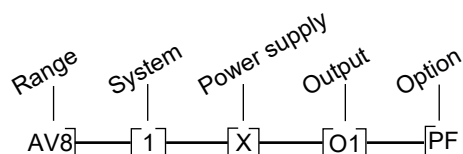

NOTE: please check the availability of the needed code on the verification path diagram on left before order.




STANDARD

Not certified according to MID directive. Cannot be used for fiscal (legal) metrology.

How to order



EM11 DIN AV8 1 X O1 X

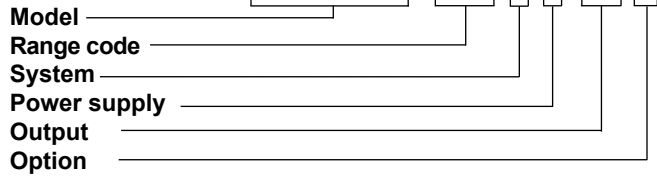

Type Selection

| Range code | System | Power supply | Option |
|---|---|---|----------------|
| AV7: 120V _{LN} AC - 5(32)A (direct connection) | 1: 1-phase | X: Self power supply (from 48 to 62Hz). The instrument works on the range from -20% to +20% of the measuring input nominal voltage. | X: none |
| AV8: 230V _{LN} AC - 5(32)A (direct connection) | Output | | |
| | O1: Pulse type (open collector output) | | |
| | R1: Alarm type (relay output) | | |

NOTE: please check the availability of the needed code on the verification path diagrams below before order.

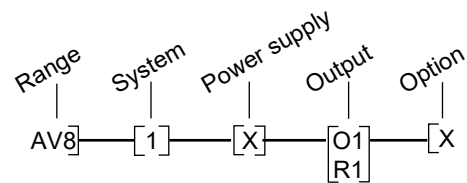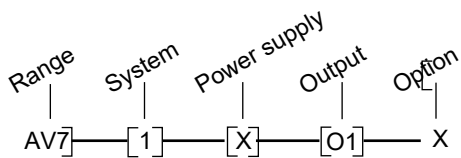

Input specifications

| | | | |
|--|--|----------------------------------|---|
| Rated inputs | System: 1 | Type | LCD, h 7mm |
| Current range (by shunt) | AV7 and AV8: 5(32) A | Instantaneous variables read-out | 4 DGT (V and A) 3 DGT (W, var, Wdmd, Wdmd max, Hz, PF) |
| Voltage range | AV7: 120 VLN AC AV8: 230 VLL AC | Min. Max. indication | Max. 9 999; Min. 0 (0.0) |
| Accuracy (Display) (@25°C ±5°C, R.H. ≤60%, 48 to 62Hz) | | Energies | Total: 6 DGT |
| AV7 model | Ib: 5A, I _{max} : 32A; Un: 120VLN (-20% +20%) | LEDs | Red LED (Energy consumption), 1000 pulses/kWh (Max Frequency 16 Hz) according to EN62053-11 |
| AV8 model | Ib: 5A, I _{max} : 32A; Un: 230VLN (-20% +20%) | Measurements | See "Measuring variables and Min. Max. indications" |
| Current | From 0.04Ib to 0.2Ib, PF=1: ±(0.5% RDG +3DGT) From 0.2Ib to I _{max} , PF=1: ±(0.5% RDG +1DGT). | Method | TRMS measurements of distorted wave forms |
| Voltage | In the Un range: ±(0.5% RDG +2DGT) | Coupling type | Direct |
| Frequency | ±0.1Hz (48 to 62Hz) | Crest factor | Ib 5A ≤4 (45A max. peak) |
| Active power | ±(1%RDG +2DGT) | Current Overload | |
| Reactive power | ±(2%RDG +2DGT) | Continuous | 32A, @ 50Hz |
| Active energy | Class 1 according to EN62053-21 and Class B according to EN50470-3. | For 10ms | 960A, @ 50Hz |
| Reactive energy | Class 2 according to EN62053-23. | Voltage Overload | |
| Reference values | Ib: 5A, I _{max} : 32A, 0.1 Ib: 0.5A | Continuous | 1.2 Un |
| Start up current: | 20mA | For 500ms | 2 Un |
| Energy additional errors | | Input impedance | |
| Influence quantities | According to EN62053-21, EN62053-23 | 120VL-N (AV7) | >720KΩ |
| Temperature drift | ≤200ppm/°C | 230VL-N (AV8) | >720KΩ |
| Sampling rate | 4096 samples/s @ 50Hz 4096 samples/s @ 60Hz | 5(32) A (AV7-AV8) | < 0.5VA |
| Display refresh time | 1 sec. | Frequency | 48 to 62 Hz |
| Display | 1 line (max: 6 DGT) | Key-pad | 1 push-button for variable selection and programming of the instrument working parameters. Not available in case of "PF" option. |

Output specifications

| | | | |
|-----------------------|---|----------------------|---|
| Digital output | | Alarm modes | DC 13-1.5A @ 24VDC |
| Number of outputs | 1, open collector programmable, from 0.001 to 1 kWh for each pulse. | Controlled variables | Up alarm or down alarm kW, kWdmd, kvar, PF, A, V, Hz |
| X Option | Fixed, 0,001 kWh/pulse | Set-point adjustment | Programmable on all the measuring range (see "Measuring variables and Min. Max. indications") |
| PF option | V _{ON} 1.2 VDC/ max. 100 mA | Hysteresis | programmable on all the measuring range (see "Measuring variables and Min. Max. indications") |
| Signal | V _{OFF} 30 VDC max. | On-time delay | 0 to 9999s (166min) |
| Pulse duration | ≥100ms < 120msec (ON), ≥120ms (OFF), according to EN62052-31 | Off-time delay | 0 to 9999s (166min) |
| Insulation | By means of optocouplers, 4000 VRMS output to measuring inputs | Min. response time | 1s, set-point on-time delay: "0 s" |
| Alarm output | Not available in case of PF option. | Insulation | 4000 VRMS output to measuring inputs |
| Number of outputs | 1 | | |
| Type | Relay, SPST type AC 1-5A @ 250VAC DC 12-5A @ 24VDC AC 15-1.5A @ 250VAC | | |

Software functions (Not available in case of PF option)

| | | | |
|-----------------|---|-------------------|---|
| Password | Numeric code of max. 4 digits; 2 protection levels of the programming data: | Displaying | 1 variable per page (See «Measuring variables and Min. Max. indications») |
| 1st level | Password "0", no protection; | Reset | By means of the front key-pad: |
| 2nd level | Password from 1 to 9999, all data are protected | | - W dmd max; - energies: kWh, kvarh |

General specifications


| | | | |
|---|--|------------------------------------|--|
| Operating temperature | -25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23 | Surge | 80MHz On current and voltage measuring input circuits: 4kV; |
| Storage temperature | -30°C to +70°C (-22°F to 140°F) (R.H. < 90% non-condensing @ 40°C) according to EN62053-21, EN50470-1 and EN62053-23 | Radio frequency suppression | According to CISPR 22 |
| Installation category | Cat. III (IEC60664, EN60664) | Standard compliance | |
| Insulation (for 1 minute) | 4000 VRMS between measuring inputs and digital output (O1 and R1). | Safety | IEC60664, IEC61010-1 EN60664, EN61010-1 (EN62052-11) EN50470-1, EN62053-21, EN62053-23, EN50470-3. |
| Dielectric strength | 4000 VRMS for 1 minute | Metrology | DIN43864, IEC62053-31 |
| CMRR Noise rejection | 100 dB, 48 to 62 Hz | Pulse output Approvals | CE, cULus (X option) MID (PF option) |
| EMC | According to EN62052-11 | Connections | Screw-type |
| Electrostatic discharges | 8kV air discharge; | Cable cross-section area | Measuring inputs: min. 2.5 mm ² , max. 10 mm ² ; |
| Immunity to irradiated electromagnetic fields | Test with applied current: 10V/m from 80 to 2000MHz; Test without any applied current: 30V/m from 80 to 2000MHz; | | Min./Max. screws tightening torque: 0.5 Nm / 1.1 Nm |
| Burst | On current and voltage measuring input circuits: 4kV | | Other terminals: 1.5 mm ² . |
| Immunity to conducted disturbances | 10V/m from 150KHz to | DIN Housing | Screws tightening torque: 0.5 Nm |
| | | Dimensions (WxHxD) | 17.5 (+0.5 -0) x 90 x 67.5 mm |
| | | Material | Nylon PA66, self-extinguishing: UL 94 V-0 |
| | | Mounting | DIN-rail |
| | | Protection degree | |
| | | Front | IP40 |
| | | Screw terminals | IP20 |
| | | Weight | Approx. 100 g (packing included) |

Power supply specifications


| | | | |
|------------------------------|--|--------------------------|-------|
| Self supplied version | 120VLN (AV7), 230 VLN (AV8) (-20% +20%) 48-62Hz | Power consumption | ≤ 3VA |
|------------------------------|--|--------------------------|-------|

Accuracy (according to EN50470-3 and EN62053-23)

kWh, accuracy (RDG) depending on the current

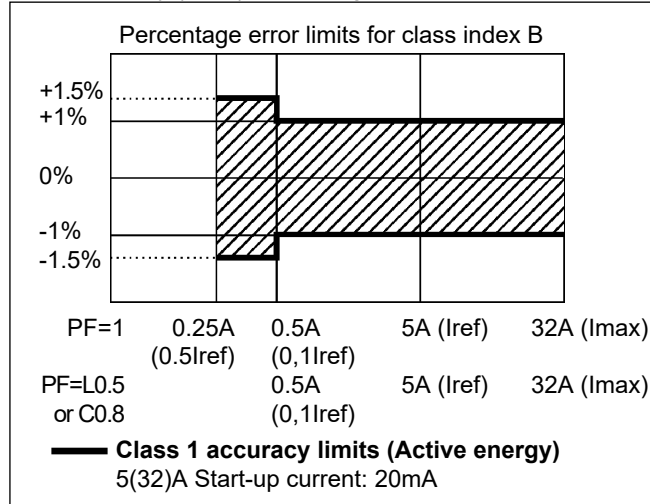

kvarh, accuracy (RDG) depending on the current

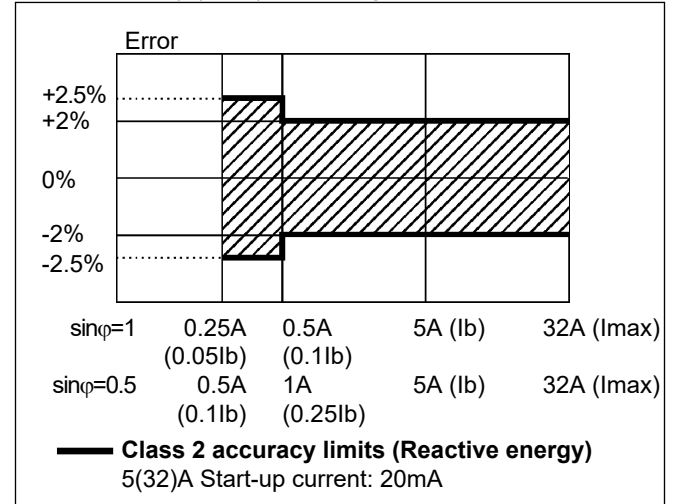

MID compliance (PF option only)

Accuracy

0.9 Un ≤ U ≤ 1.1 Un;
0.98 fn ≤ f ≤ 1.02 fn;
fn: 50 or 60Hz;
cosφ: 0.5 inductive to 0.8
capacitive.
Class B
I st: 0.02A; I min: 0.25A;
I tr: 0.5A; I ref: 5A;
I max: 32A.

EMC compliance

E2

Mechanical compliance

M2

Protection degree

in order to achieve the protection against dust and water required by the norms harmonized to MID, the meter must be used only installed in IP51 (or better) cabinets.

Operating temperature

-25°C to +55°C (-13°F to 131°F) (R.H. from 0 to 90% non-condensing @ 40°C)

Used calculation formulas

Phase variables

Instantaneous effective voltage

$$V_{1N} = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i^2}$$

Instantaneous active power

$$W_1 = \frac{1}{n} \cdot \sum_{i=1}^n (V_{1N})_i \cdot (A_1)_i$$

Instantaneous power factor

$$\cos\phi_1 = \frac{W_1}{VA_1}$$

Instantaneous effective current

$$A_1 = \sqrt{\frac{1}{n} \cdot \sum_{i=1}^n (A_1)_i^2}$$

Instantaneous apparent power

$$VA_1 = V_{1N} \cdot A_1$$

Instantaneous reactive power

$$\text{var}_1 = \sqrt{(VA_1)^2 - (W_1)^2}$$

Where: n= sample number

Energy metering

$$kWh_1 = \int_{t_1}^{t_2} P_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} P_1(j)$$

$$k \text{ var } h_1 = \int_{t_1}^{t_2} Q_1(t) dt \cong \Delta t \sum_{j=n_1}^{n_2} Q_1(j)$$

Where:

P= active power;

Q= reactive power;

t₁, t₂ =starting and ending time points of consumption recording;

n_j= time unit;

Δt= time interval between two

successive power consumptions;

n₁, n₂ = starting and ending discrete

time points of consumption recording

Measuring variables and Min. Max. indications



| Page number | Variable | Min. Max. Indication | Notes |
|-------------|------------|-----------------------------------|--|
| 1 | kWh | from 0.01 to 999999, autoranging. | Total (only consumed energy) |
| 2 | kvarh | from 0.0 to 99999.9 | Total (only consumed energy) |
| 3 | kW | from 0.00 to 9.99 | |
| 4 | kW dmd | from 0.00 to 9.99 | Integration time programmable from 1 to 30 minutes |
| 5 | kW dmd max | from 0.00 to 9.99 | Max value with data storage (in EEPROM) |
| 6 | V | from 0.0 to 999.9 | |
| 7 | A | from 0.0 to 32.00 | |
| 8 | Hz | from 48.0 to 62.0 | |
| 9 | PF (cosφ) | from L/C. 00 to L/C. 99 | |
| 10 | kvar | from 0.00 to 9.99 | |

Note: In case of X option all the variables above can be scrolled using the front push button, in case of PF option the push button is not available and the variables are automatically scrolled.

Insulation between inputs and outputs


| | Measuring inputs | Relay output | Open collector output | AC self-power supply |
|-----------------------|------------------|--------------|-----------------------|----------------------|
| Measuring inputs | - | 4kV | 4kV | 0kV |
| Relay output | 4kV | - | 4kV | 4kV |
| Open collector output | 4kV | 4kV | - | 4kV |
| AC self-power supply | 0kV | 4kV | 4kV | - |

Wiring diagrams and relay output (R1)

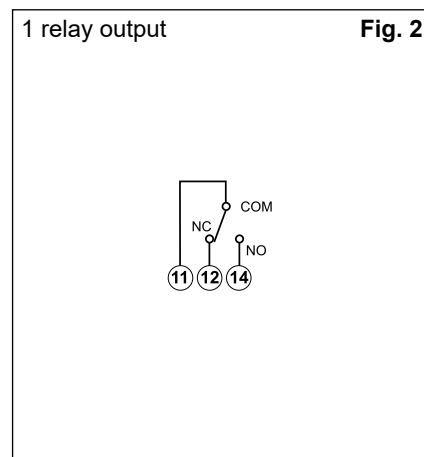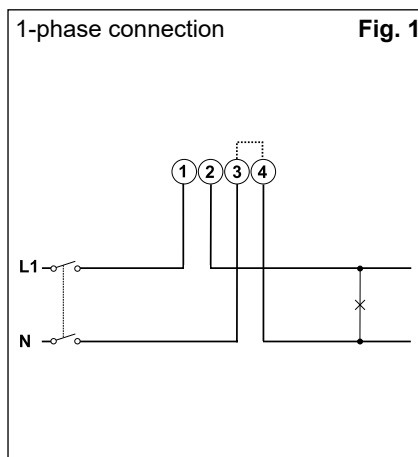


NOTE: The 3 and 4 terminals, in the instrument, are wired together

Wiring diagrams and open collector output (O1)

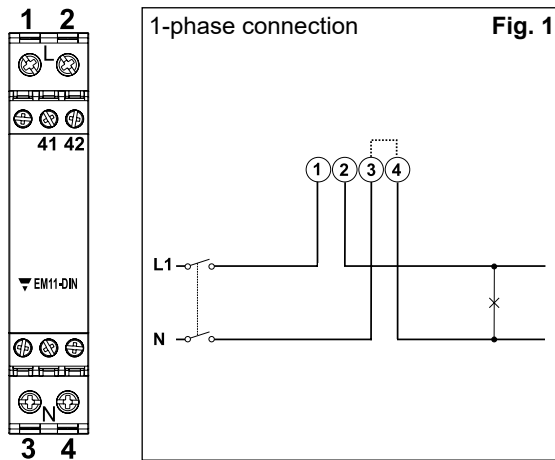


NOTE: The 3 and 4 terminals, in the instrument, are wired together

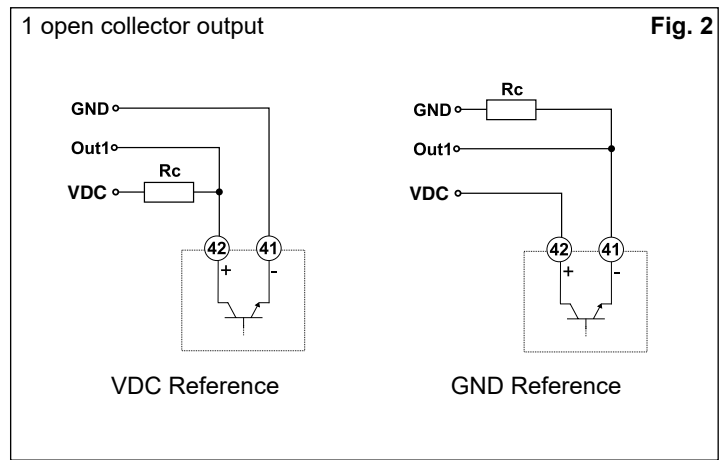


The load resistances (Rc) must be designed so that the close contact current is lower than 100mA; the VDC voltage must be lower than or equal to 30VDC.

Frontal panel description

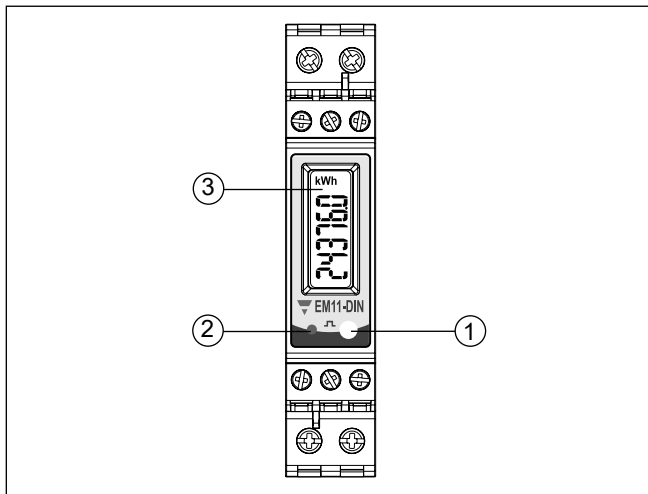

- 1. Push button**
To program the configuration parameters and the display of the variables.
Not available in case of PF option.
- 2. LED**
Red LED to show the consumed energy.
- 3. Display**
LCD-type with alphanumeric indication to:
 - display configuration parameters;
 - display all the measured variables.

Dimensions and panel cut-out

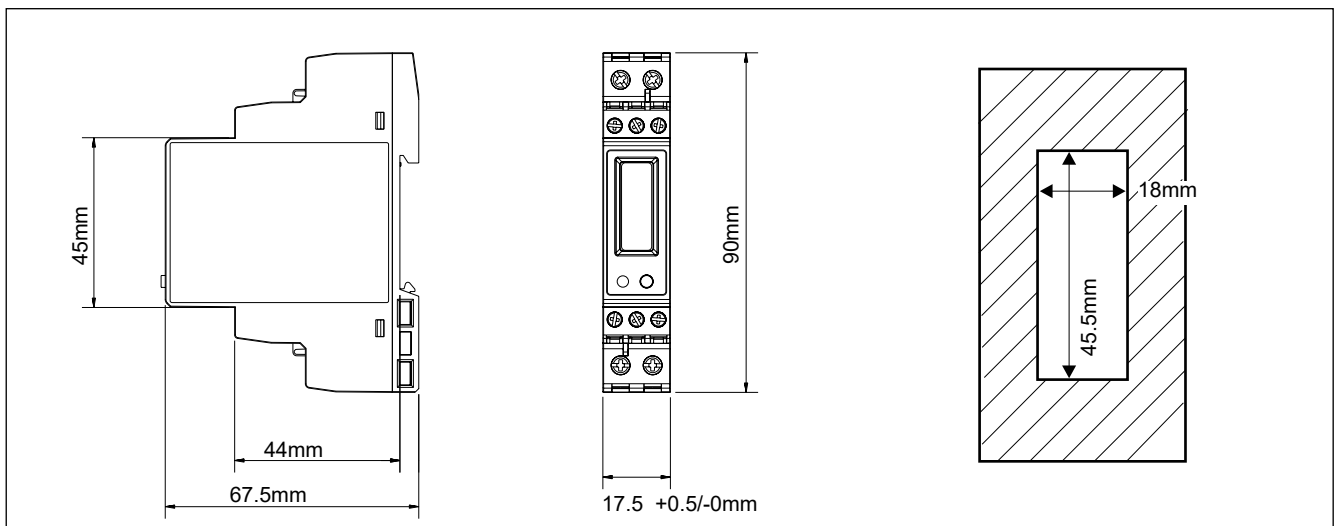

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Digital Panel Meters](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[M00558-00](#) [01.098.1658.1](#) [70.360.4828.0](#) [72331-00](#) [85310-25](#) [86642-00](#) [87268-13](#) [87316-00](#) [87719-26](#) [98107-56](#) [HB8260-R36-90](#) [DMS-20ACV-3-R-C](#) [EM11DINAV81XR1X](#) [25.325.3253.1](#) [25.325.4253.1](#) [25.330.0453.1](#) [20046-20](#) [20182-23](#) [AP1021](#) [25.320.5053.0](#)
[25.350.3453.1](#) [25.394.3653.1](#) [25.521.3253.0](#) [28006-01](#) [04.630.1080.0](#) [20078-20](#) [EM11DINAV81XO1X](#) [85874-26](#) [87166-00](#) [87895-00](#)
[28000-03](#) [K3GN-NDT1-FLK 24VDC](#) [82322K-11](#) [86641-00](#) [87004-00](#) [HB8280R2490](#) [HB8260R4890](#) [SCE016MD3MV0W10](#) [20125-21](#)
[86640-00](#) [PG-100-103GP](#) [PG-100-102RP](#) [PG-100B-102R-H](#) [PG-100B-103R](#) [PG-100B-102R](#) [PG-100N-103R-W](#) [PG-100N-103R](#) [PG-100N-102R](#) [PG-100-102GH](#) [PG-100-103RP](#)