

Transmitter for Digital Signals Type G 5010 1106



- Single channel transmitter
- Contact input
- Input pulse prolongation
- Codeable LED output e.g. for feedback purposes
- Supplied by Dupline®, no external supply required
- Mini-E housing
- Direct wall or DIN-rail mounting
- Channel coding by GAP 1605

Product Description

Dupline®-powered single-channel transmitter in Mini-E housing with contact input. Especially well suited in places where no power supply is available. On the input, there is a built-in pulse-prolongation which ensures that even short input pulses are transmitted. Upon activation of the input

a short charge current pulse ensures that the contacts are kept clean. On the front of the module, there is a red LED which can be coded for any Dupline® channel address for indication of channel ON status. There are only 4 terminals on the module: 2 for Dupline® and 2 for the input.

Type Selection

Supply

Supplied by Dupline®

Ordering No.
1 channel
Contact

G 5010 1106

Input Specifications

Inputs

Open loop voltage
Short-circuit current
Operating time for signal "1"
Operating time for signal "0"
Contact resistance
Input pulse prolongation
Cable length
Dielectric voltage
Input - Dupline®

1 contact
2.5 VDC
17 µA
< 1 pulse train + 10 ms
< 1 pulse train + 500 ms
< 1 kΩ
min. 272 ms
< 3 m
None

Ordering Key

G 5010 1106

Type: Dupline®
Mini-E housing
Function
No. of channels
Input type

Supply Specifications

Power supply

Current consumption
with LED OFF
with LED ON

Supplied by Dupline®

Typ. 450 µA
Typ. 1.2 mA

General Specifications

Environment

Degree of protection IP 20
Pollution degree 3 (IEC 60664)
Operating temperature -20° to +50°C (-4° to +122°F)
Storage temperature -50° to +85°C (-58° to +185°F)

Humidity (non-condensing)

20 to 80%

Mechanical resistance

Shock 15 G (11 ms)
Vibration 2 G (6 to 55 Hz)

Dimensions

Material

49 x 22.5 x 56 mm (L x W x H)
PC/ABS blend

Mode of Operation

Dupline®-powered 1-channel transmitter with contact input. There is a built-in pulse-prolongation on the input to ensure that even short input pulses are transmitted. On the front of the module there is a red LED which can be coded to indicate the status of any Dupline®-channel. The input and the LED output can be coded individually by means of the code programmer GAP 1605. For details, please refer to the

respective data sheet. Please note that a special cable (GAP-TPH-CAB) is required to connect the GAP 1605 to the programming plug behind the front plate of G 5010 1106.

The channel address for the input is selected under I/O-1 on the GAP 1605 and the channel address for the LED output under I/O-5.


If an address is assigned to I/O-3 or I/O-4, this address will be activated continuously.

Accessories


Programming cable to GAP 1605

GAP-TPH-CAB

Wiring Diagram

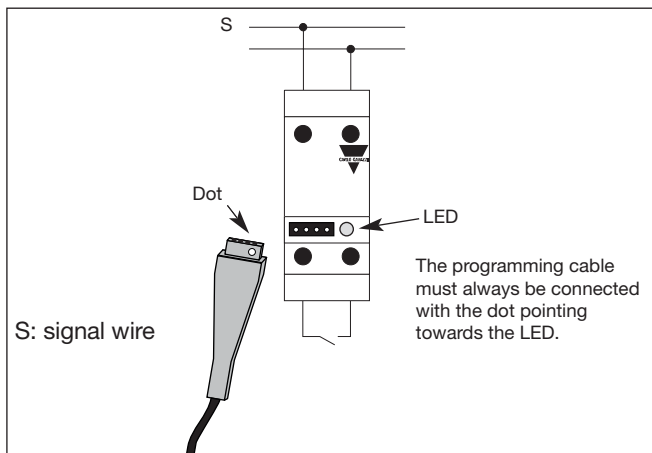

Dimensions (mm)

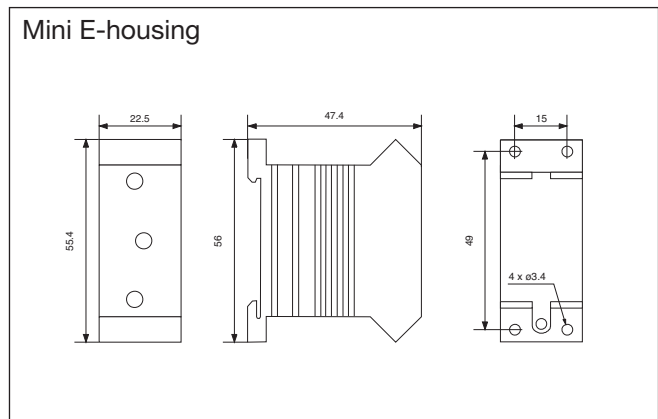

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [G88104401](#) [OACU](#) [C4SWOUT](#) [PB16H](#)
[G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [G78-16-E](#) [DA5](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#)
[C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [GT1-DA04](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-](#)
[OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#)
[GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-](#)
[S614-A](#) [C200H-OD211](#)