


# Proximity Magnetic Sensors Rectangular Body, MM series

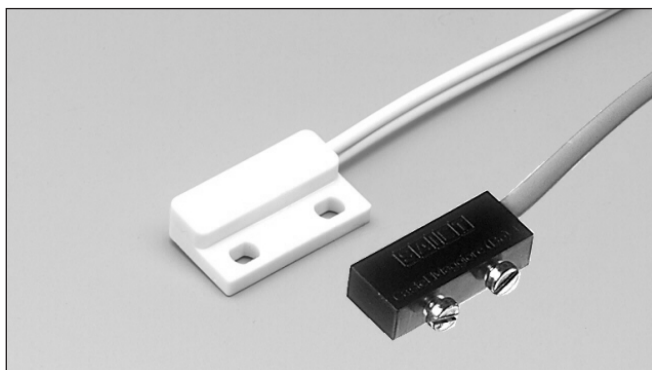

- Plastic rectangular case
- Extremely small dimensions
- High sensibility contacts
- NO or CO output functions

## Product Description

The micro-miniature types are characterized by extremely small dimensions.

The MM.A.6 model contains, in a very small case, a very high sensibility contact, with

low hysteresis.

The two fixing holes, suited for M3 screws, allow simple mounting procedure over a large variety of applications.

## Ordering Key

**MM.A.3**

Type \_\_\_\_\_  
 Output Function \_\_\_\_\_  
 Reed contact Type \_\_\_\_\_

## Type Selection

Output function	External dimensions	Output connection	Reference
NO	14 x 23,5 x 6,1	Twin lead cable	MM.A.6
	7 x 27 x 11	PVC Cable	MM.A.3
Change-over			MM.S.1

## General specification

Case	Plastic
Protection degree	IP67
Operating temperature	-25 to +75 °C


## Electrical specifications

Contacts	3	6	S.1
Max switching voltage	500 Vac	100 Vdc	100 Vac
Max switching current	0,5 A	1 A	0,25 A
Max switching power	10 VA	10 VA	5 VA


## Operating distance

Magnetic Units	CL.1	CL.2	CL.3	CL.4
MM.S.1, MM.A.3	10	15	22	35
MM.A.6	14	20	30	40

## Dimensions

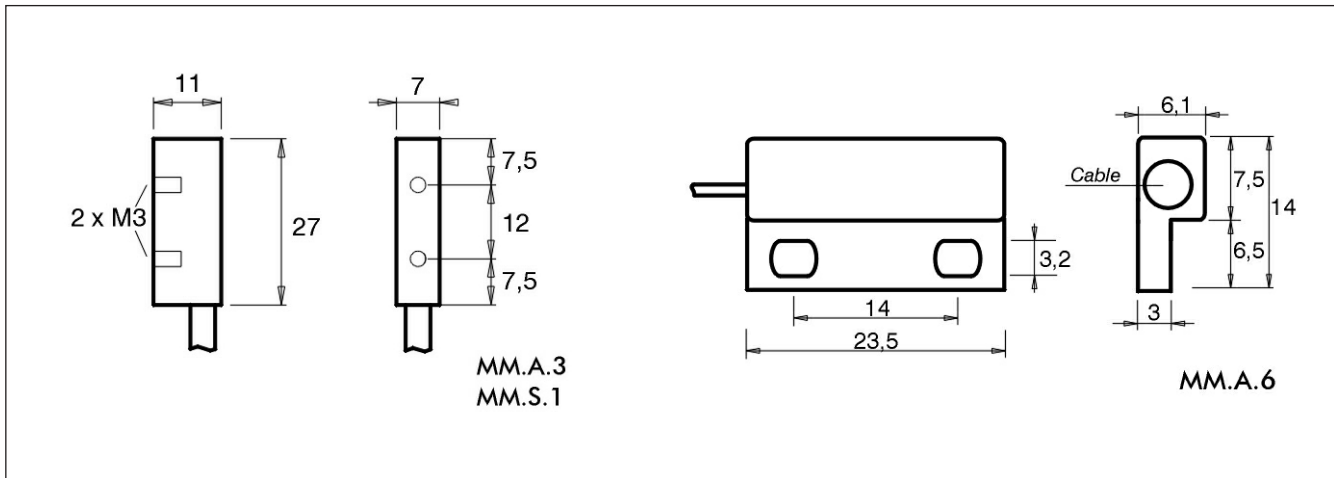

## Wiring Diagrams

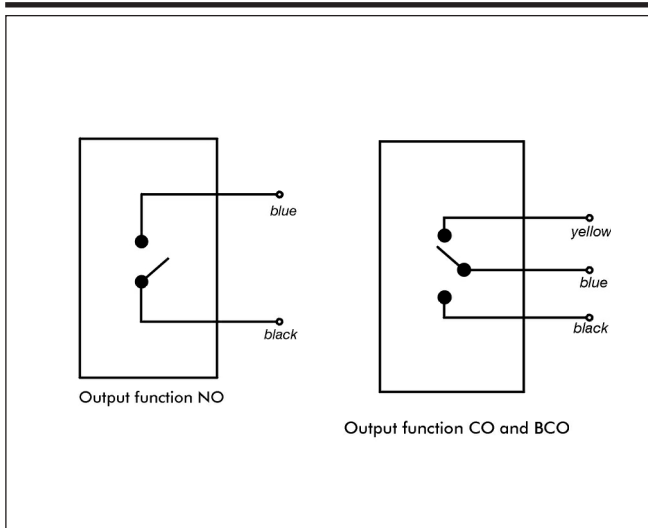

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Photoelectric Sensors](#) category:*

*Click to view products by [Carlo Gavazzi](#) manufacturer:*

Other Similar products are found below :

[7442AD2X5FRX](#) [EX-19B-LP](#) [7443AR0X5FRX](#) [7452AD4D4NNX](#) [F3WD052C5M](#) [7655AR-04-F-1-2-RX](#) [7694ADE04DS2X](#) [FE7C-FRC6S-M](#) [PM-R24-R](#) [Q45VR2FPQ](#) [13104RQD07](#) [E3JUXM4MN](#) [E3L2DC4](#) [E3S3LE21](#) [E3SCT11M1J03M](#) [E3SDS20E21](#) [E3VDS70C43S](#)  
[E3XNM16](#) [BR23P](#) [HOA6563-001](#) [OJ-3307-30N8](#) [OS-311A-30](#) [P32013](#) [P34036](#) [P43004](#) [P56001](#) [P60001](#) [PB10CNT15PO](#) [S14132](#) [935286-000](#) [S52101](#) [S56258](#) [SH-21E](#) [FD-SN500](#) [FE7B-FDRB6-M](#) [SU-79](#) [T36342](#) [T40300](#) [T60001](#) [PD60CNX20BP](#) [FX2-A3R](#) [FX-302-HY](#) [FZS](#)  
[PM-T64W](#) [PX-22](#) [PZ2-51P](#) [CX-491-P-J](#) [CYNUTX10](#) [UZH802](#) [UZH803](#)