

Timers

True delay on release

Types DBB02, PBB02

CARLO GAVAZZI



DBB02



PBB02

- Time range 60 s to 10 h - battery powered
- 3 time ranges selectable by DIP-switches
- Knob-adjustable time setting
- Automatic start after drop-out of power supply
- Repeatability: $\leq 0.2\%$
- Output: 8 A SPDT or 8 A DPDT relay
- For mounting on DIN-rail in accordance with DIN/EN 50 022 or Plug-in
- 22.5 mm Euronorm or 36 mm Plug-in module housing
- Combined AC and DC power supply
- LED indication for power supply ON


Product Description

Multi voltage true delay on release timer with 3 time ranges from 60 s to 10 h selectable by DIP-switches. The built-in battery (NiCd)

will be charged while the power supply is applied. For mounting on DIN-rail (DBB02) or Plug-in (PBB02).

Ordering key

DBB 02 C M24

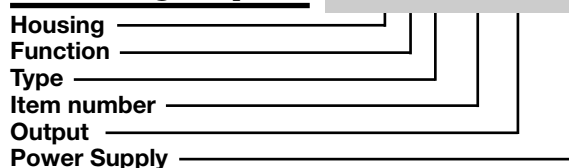

Type Selection

Mounting	Output	Housing	Supply: 24 to 240 VAC/DC
For DIN-rail	SPDT DPDT	D - Housing D - Housing	DBB 02 C M24 DBB 02 D M24
Plug-in	SPDT DPDT	P - Housing P - Housing	PBB 02 C M24 PBB 02 D M24

Time Specifications

Time ranges Selectable by DIP-switches	60 to 600 s 0.1 to 1 h 1 to 10 h	Time variation Within rated battery voltage $\leq 1\%$ Within rated power supply $\leq 0.05\%$ Within ambient temperature $\leq 0.2\%$
Repeatability	$\leq 0.2\%$	Reset Power supply applied for min. 200 ms

Output Specifications

Output	SPDT or DPDT relay
Rated insulation voltage	250 VAC (RMS)
Contact Ratings(AgNi)	μ
Resistive loads	AC 1 8 A @ 250 VAC DC 12 5 A @ 24 VDC
Small inductive loads	AC 15 2.5 A @ 250 VAC DC 13 2.5 A @ 24 VDC
Mechanical life	$\geq 2 \times 10^6$ operations
Electrical life	AC 1 $\geq 10^5$ operations (at 8 A, 250 V, $\cos \varphi = 1$)
Operating frequency	< 3600 operations / h
Dielectric strength	
Dielectric voltage	2 kVAC (RMS)
Rated impulse withstand voltage	4 kV (1.2/50 ∞ s)

Supply Specifications

Power supply	Overvoltage cat. III (IEC 60664, IEC 60038)
Rated operational voltage through terminals: (DBB02) A1, A2 (PBB02) 2, 10	24 to 240 VAC/DC +10% -15%, 45 to 65 Hz
Voltage interruption	≤ 40 ms
Rated operational power	AC supply: 3.7 VA DC supply: 1.3 W
Built-in battery for time function	
Nominal voltage	4.8 VDC
Min./max. battery voltage	4.2 VDC/6.2 VDC
Charging current	2 mA
Discharging current	0.5 mA
Capacity	80 mA/h



General Specifications

Power ON delay	≤ 200 ms	Housing	
Power OFF delay	≤ 100 ms	Dimensions	DBB02: 22.5 x 80 x 99.5 mm PBB02: 36 x 80 x 94 mm
Indication for Power supply ON	LED, green	Weight	Approx 130 g
Environment	(EN 60529) IP 20 Pollution degree 3 (DBB02), 2 (PBB02) (IEC 60664)	Screw terminals	(DBB02) Max 0.5 Nm according to IEC EN 60947
Operating temperature up to 265 VAC, 135 VDC from 135 VDC @5A	0 to 60 °C, R.H. < 95%	Approval	UL, CSA
Storage temperature	0 to 45 °C, R.H. < 95% -30 to 80 °C, R.H. < 95%	CE Mark	Yes
		EMC	Electromagnetic Compatibility According to EN 61000-6-2 According to EN 61000-6-3
		Timer Specifications	According to EN 61812-1

Mode of Operation

The relay(s) operates as soon as the power supply is applied.

When the power supply is interrupted the time period starts and, at the expiration of the set time period, the relay releases.

If the power supply is reapplied before the relay released the time is reset and the relay remains ON.

The built-in battery (NiCd) will be charged while the power supply is applied.

Note:
DBB02 and PBB02 should not be operated by pulses shorter than 200 ms.
For these purposes the relays DMB01 or PMB01, operated by external contact function, should be used.


The battery test is performed on terminals + and A2 or 7 and 10.

It is recommended to connect DBB02 and PBB02 to the power supply for 42 h before it is put into regular service in order to compensate for energy losses due to, for example, a long storage period.


Range/Time Setting

Adjust the time range setting the DIP-switches 1 and 2 as shown below.
To access the DIP-switches open the plastic cover using a screwdriver as shown below.




Centre knob:
Time setting on relative scale: 1 to 10 with respect to the chosen range.

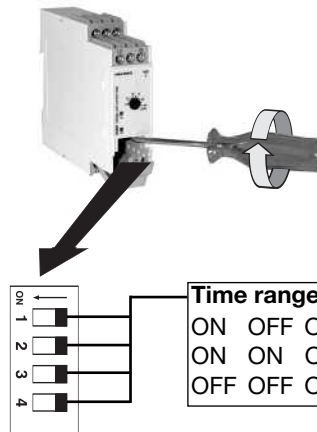

Operation Diagram

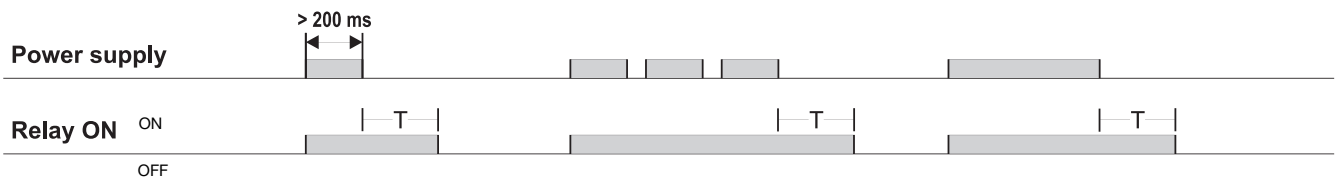

Curves

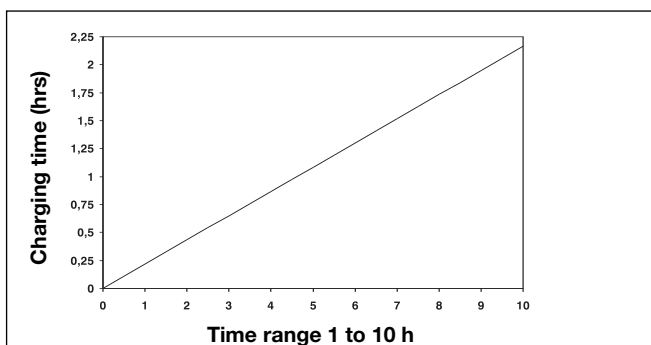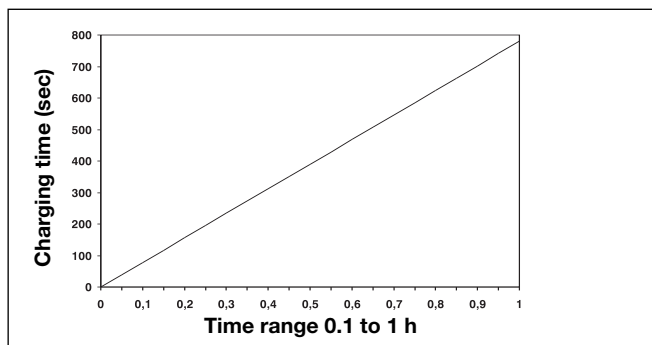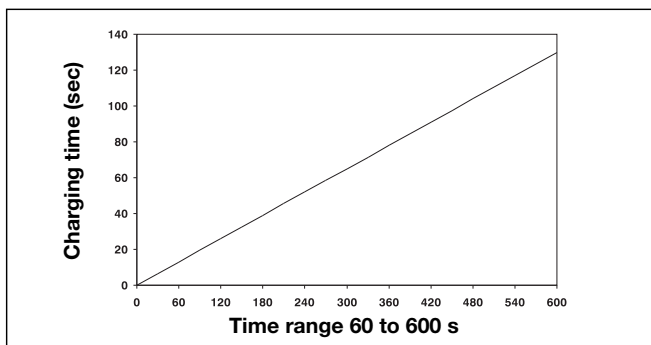


The tables indicate the charging time needed to keep the built-in battery fully charged for a certain adjusted time period.

Example
Adjusted time period 10h, battery charging time will be about 2.2 h.



At 5 operations: 5 x 10 h, battery charging will be 5 x 2,2 h. If the calculated charging time cannot be obtained, then the battery voltage has to be checked, as it must not drop below 4.2 VDC (min. battery voltage).

Test can be performed on terminals + and A2 or 7 and 10.

Wiring Diagrams

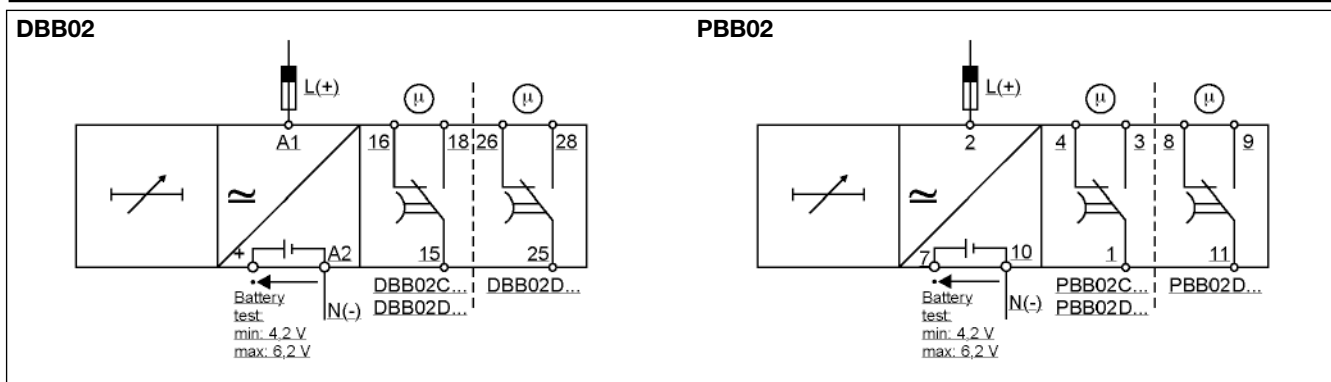

Dimensions

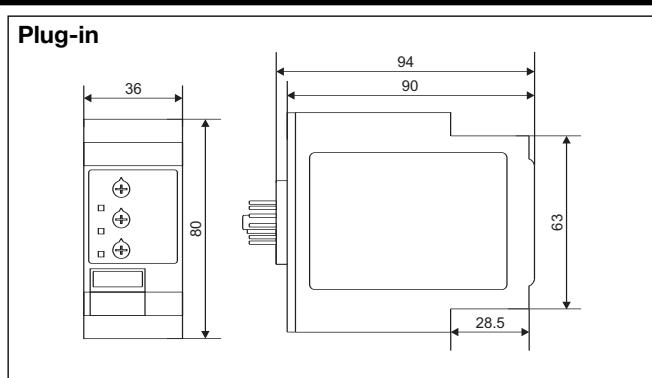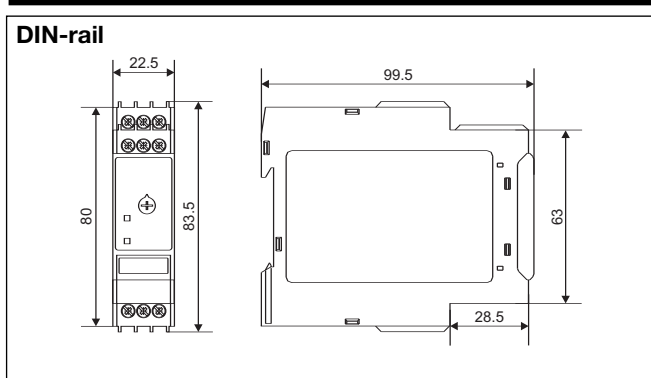

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Time Delay & Timing Relays](#) category:

Click to view products by [Carlo Gavazzi](#) manufacturer:

Other Similar products are found below :

[5NO30](#) [614-11B-0A2](#) [614-11B-0A3](#) [614-11B-0A4](#) [614-11B-0A6](#) [614-11B-0A8](#) [614-11C-0A1](#) [614-11C-0A2](#) [614-11C-0A5](#) [614-11Q-0A3](#) [614-11Q-0A6](#) [614-11T-0A3](#) [614-11T-0A6](#) [614-11T-0A7](#) [614-12B-4A1](#) [614-12C-400](#) [614-12Q-400](#) [614-12T-600](#) [614-22T-4A1](#) [614-43B-400](#) [614-43C-100](#) [614-43F-200](#) [614-43Q-0A2](#) [614-43Q-100](#) [614-43Q-600](#) [614-43T-0A9](#) [614-43T-600](#) [614-43U-400](#) [614-43U-4A1](#) [614-43U-6A2](#) [615-21T-200](#) [655-11T-100](#) [655-11U-500](#) [655-12T-300](#) [655-22T-400](#) [655-22T-600](#) [CUA-41-30001](#) [CUA-41-30030](#) [CUA-41-70180](#) [CUA-41-71038](#) [CUA-42-30005](#) [CUA-42-30010](#) [CUA-42-30120](#) [CUA-42-70120](#) [CUA-99-72502](#) [CUC-41-30030](#) [CUF-42-30010](#) [CUH-41-31006](#) [7012AFX](#) [7012GD](#)