


# Wirewound Resistors, Commercial Coated, Axial Lead



### FEATURES

- High performance for low cost
- High temperature silicone coating
- Complete welded construction
- Excellent stability in operation
- High power to size ratio
- Lead (Pb)-free version is RoHS compliant

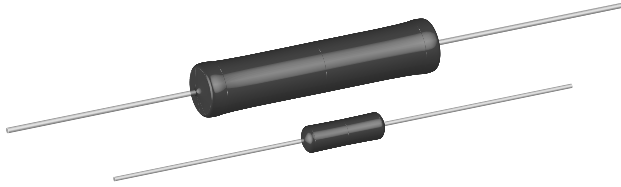

RoHS\* COMPLIANT

### STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING** $P_{25^\circ\text{C}}$ W |                           | RESISTANCE RANGE $\Omega$<br>$\pm 5\%$ , $\pm 10\%$ *** | WEIGHT (Max.)<br>g |
|--------------|------------------|---|---------------------------|---|--------------------|
|              |                  | Characteristic U + 250 °C               | Characteristic V + 350 °C |   |                    |
| CW1/2        | CW-1/2           | 0.5                                     | -                         | 0.1 - 1.77K   | 0.21               |
| CW001        | CW-1             | 1.0                                     | -                         | 0.1 - 6.37K   | 0.34               |
| CW01M        | CW-1M            | 1.0                                     | -                         | 0.1 - 3.3K  | 0.3                |
| CW002        | CW-2             | 4.0                                     | 5.5                       | 0.1 - 28.7K   | 2.1                |
| CW02M        | CW-2M            | 3.0                                     | 3.75                      | 0.1 - 12K   | 0.65               |
| CW02B        | CW-2B            | 3.0                                     | 3.75                      | 0.1 - 15K   | 0.7                |
| CW02B...13   | CW-2B-13         | 4.0                                     | 6.0                       | 0.1 - 6.8K  | 0.9                |
| CW02C        | CW-2C            | 2.5                                     | 3.25                      | 0.1 - 19.9K   | 1.8                |
| CW02C...14   | CW-2C-14         | 2.5                                     | 3.25                      | 0.1 - 19.9K   | 1.2                |
| CW005        | CW-5             | 5.0                                     | 6.5                       | 0.1 - 58.5K   | 4.2                |
| CW005...2    | CW-5-2           | 4.0                                     | 5.0                       | 0.1 - 40.3K   | 4.2                |
| CW005...3    | CW-5-3           | 5.0                                     | 6.5                       | 0.1 - 58.5K   | 4.2                |
| CW007        | CW-7             | 7.0                                     | 9.0                       | 0.1 - 95.2K   | 4.7                |
| CW010        | CW-10            | 10.0                                    | 13.0                      | 0.1 - 167K  | 9.0                |
| CW010...3    | CW-10-3          | 10.0                                    | 13.0                      | 0.1 - 167K  | 9.0                |

\*\* Vishay Dale CW models have two power ratings, depending on operating temperature and stability requirements  
 \*\*\* 3% tolerance available

• Shaded areas indicate most popular models

### TECHNICAL SPECIFICATIONS

| PARAMETER                       | UNIT     | CW RESISTOR CHARACTERISTICS  |
|---------------------------------|----------|--|
| Temperature Coefficient         | ppm/°C   | $\pm 90$ for below 1.0 $\Omega$ , $\pm 50$ for 1.0 $\Omega$ to 9.9 $\Omega$ , $\pm 30$ for 10 $\Omega$ and above   |
| Dielectric Withstanding Voltage | $V_{AC}$ | 1000   |
| Short Time Overload             | -        | 5 x rated power for 5 sec. for 3.75 W size and smaller,<br>10 x rated power for 5 sec. for 4 W size and greater  |
| Terminal Strength               | lb       | 10 minimum   |
| Maximum Working Voltage         | V        | $(P \times R)^{1/2}$   |
| Operating Temperature Range     | °C       | Characteristic U = - 65/+ 250, Characteristic V = - 65/+ 350   |
| Power Rating                    | -        | Characteristic U = + 250 °C max. hot spot temperature, $\pm 0.5\%$ max. $\Delta R$ in 2000 hrs. load life<br>Characteristic V = + 350 °C max. hot spot temperature, $\pm 3.0\%$ max. $\Delta R$ in 2000 hrs. load life |

### GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: CW02C10K00JB1214 (preferred part numbering format)

C W 0 2 C 1 0 K 0 0 J B 1 2 1 4

**GLOBAL MODEL**  
 (See Standard Electrical Specifications Global Model column for options)

**RESISTANCE VALUE**  
 R = Decimal  
 K = Thousand  
 1R500 = 1.5  $\Omega$   
 1K500 = 1.5 k $\Omega$

**TOLERANCE CODE**  
 H =  $\pm 3\%$   
 J =  $\pm 5\%$   
 K =  $\pm 10\%$

**PACKAGING**  
 E70 = Lead (Pb)-free, Tape/Reel 1k pcs  
 E73 = Lead (Pb)-free, Tape/Reel 500 pcs  
 E12 = Lead (Pb)-free, Bulk  
 D18 = Lead (Pb)-free, R1R80 Tape/Reel  
 CW02B...13 pack code for Europe use only  
 S70 = Tin/Lead, Tape/Reel 1k pcs  
 S73 = Tin/Lead, Tape/Reel 500 pcs  
 B12 = Tin/Lead, Bulk


**SPECIAL**  
 (Dash Number)  
 (up to 3 digits)  
 From 1-999 as applicable

Historical Part Number example: CW-2C-14 10 k $\Omega$  5% B12 (will continue to be accepted)



\* Pb containing terminations are not RoHS compliant, exemptions may apply

**DIMENSIONS**

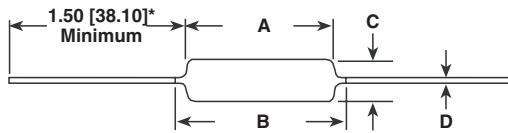

\* On some standard reel pack methods, the leads may be trimmed to a shorter length than shown.

**MATERIAL SPECIFICATIONS**

**Element:** Copper-nickel alloy or nickel-chrome alloy, depending on resistance value

**Core:** Ceramic: Steatite or alumina, depending on physical size


**Coating:** Special high temperature silicone

**Standard Terminals:** Tinned Copperweld®

**End Caps:** Stainless steel

**Part Marking:** DALE, Model, Wattage\*\*, Value, Tolerance, Date Code

\*\* Wattage marked on resistor will be “V” characteristic, CW1/2 will not be marked with wattage

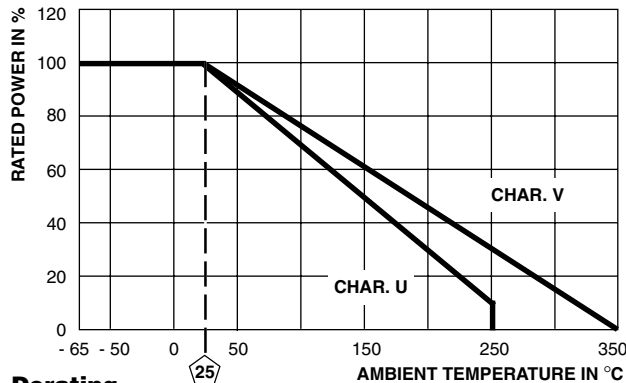

**Derating**

| MODEL      | DIMENSIONS in inches [millimeters] |                  |                                 |                                  |
|------------|------------------------------------|------------------|---------------------------------|----------------------------------|
|            | A                                  | B (Maximum)***   | C                               | D                                |
| CW1/2      | 0.250 ± 0.031<br>[6.35 ± 0.787]    | 0.281<br>[7.14]  | 0.085 ± 0.020<br>[2.16 ± 0.508] | 0.020 ± 0.002<br>[0.508 ± 0.051] |
| CW001      | 0.406 ± 0.031<br>[10.31 ± 0.787]   | 0.437<br>[11.10] | 0.094 ± 0.031<br>[2.39 ± 0.787] | 0.020 ± 0.002<br>[0.508 ± 0.051] |
| CW01M      | 0.285 ± 0.025<br>[7.24 ± 0.635]    | 0.311<br>[7.90]  | 0.110 ± 0.015<br>[2.79 ± 0.381] | 0.020 ± 0.002<br>[0.508 ± 0.051] |
| CW002      | 0.625 ± 0.062<br>[15.87 ± 1.57]    | 0.765<br>[19.43] | 0.250 ± 0.032<br>[6.35 ± 0.813] | 0.040 ± 0.002<br>[1.02 ± 0.051]  |
| CW02M      | 0.500 ± 0.062<br>[12.70 ± 1.57]    | 0.562<br>[14.27] | 0.185 ± 0.015<br>[4.70 ± 0.381] | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW02B      | 0.562 ± 0.062<br>[14.27 ± 1.57]    | 0.622<br>[15.80] | 0.188 ± 0.032<br>[4.78 ± .813]  | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW02B...13 | 0.500 ± 0.062<br>[12.70 ± 1.57]    | 0.563<br>[14.30] | 0.188 ± 0.032<br>[4.78 ± 0.813] | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW02C      | 0.500 ± 0.062<br>[12.70 ± 1.57]    | 0.593<br>[15.06] | 0.218 ± 0.032<br>[5.54 ± 0.813] | 0.040 ± 0.002<br>[1.02 ± 0.051]  |
| CW02C...14 | 0.500 ± 0.062<br>[12.70 ± 1.57]    | 0.593<br>[15.06] | 0.218 ± 0.032<br>[5.54 ± .813]  | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW005      | 0.875 ± 0.062<br>[22.22 ± 1.57]    | 1.0<br>[25.40]   | 0.312 ± 0.032<br>[7.92 ± 0.813] | 0.040 ± 0.002<br>[1.02 ± 0.051]  |
| CW005...2  | 0.875 ± 0.062<br>[22.22 ± 1.57]    | 1.0<br>[25.40]   | 0.250 ± 0.032<br>[6.35 ± .813]  | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW005...3  | 0.875 ± 0.062<br>[22.22 ± 1.57]    | 1.0<br>[25.40]   | 0.312 ± 0.032<br>[7.92 ± 0.813] | 0.032 ± 0.002<br>[0.813 ± 0.051] |
| CW007      | 1.218 ± 0.062<br>[30.94 ± 1.57]    | 1.281<br>[32.54] | 0.312 ± 0.032<br>[7.92 ± 0.813] | 0.040 ± 0.002<br>[1.02 ± 0.051]  |
| CW010      | 1.781 ± 0.062<br>[45.24 ± 1.57]    | 1.875<br>[47.62] | 0.375 ± 0.032<br>[9.52 ± 0.813] | 0.040 ± 0.002<br>[1.02 ± 0.051]  |
| CW010...3  | 1.781 ± 0.062<br>[45.24 ± 1.57]    | 1.875<br>[47.62] | 0.375 ± 0.032<br>[9.52 ± 0.813] | 0.032 ± 0.002<br>[0.813 ± 0.051] |

\*\*\* B (Maximum) dimension is clean lead to clean lead.

| PERFORMANCE****                 |   |                                |
|---------------------------------|---|--------------------------------|
| TEST                            | CONDITIONS OF TEST  | TEST LIMITS (CHARACTERISTIC V) |
| Thermal Shock                   | Rated power applied until thermally stable, then a minimum of 15 minutes at - 55 °C     | ± (2.0 % + 0.05 Ω) ΔR          |
| Short Time Overload             | 5 x rated power (3.75 W and smaller), 10 x rated power (4 W and larger) for 5 sec.      | ± (2.0 % + 0.05 Ω) ΔR          |
| Dielectric Withstanding Voltage | 1000 V <sub>rms</sub> , one minute  | ± (0.1 % + 0.05 Ω) ΔR          |
| Low Temperature Storage         | - 65 °C for 24 hours  | ± (2.0 % + 0.05 Ω) ΔR          |
| High Temperature Exposure       | 250 hours at + 350 °C   | ± (4.0 % + 0.05 Ω) ΔR          |
| Moisture Resistance             | MIL-STD-202 Method 106, 7b not applicable   | ± (2.0 % + 0.05 Ω) ΔR          |
| Shock, Specified Pulse          | MIL-STD-202 Method 213, 100 g's for 6 milliseconds, 10 shocks                           | ± (0.2 % + 0.05 Ω) ΔR          |
| Vibration, High Frequency       | Frequency varied 10 to 2000 Hz, 20 g peak, 2 directions 6 hours each                    | ± (0.2 % + 0.05 Ω) ΔR          |
| Load Life                       | 2000 hours at rated power, + 25 °C, 1.5 hours “ON”, 0.5 hours “OFF”                     | ± (3.0 % + 0.05 Ω) ΔR          |
| Terminal Strength               | 5 to 10 second 10 pound pull test; torsion test - 3 alternating directions, 360 °C each | ± (1.0 % + 0.05 Ω) ΔR          |

\*\*\*\* All ΔR figures shown are maximum, based upon testing requirements per MIL-PRF-26 at a maximum operating temperature of + 350 °C. ΔR maximum figures are considerably lower when tested at a maximum operating temperature of + 250 °C.



## Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [vishay](#) manufacturer:*

Other Similar products are found below :

[M39006/22-0577H](#) [Y00892K49000BR13L](#) [VSKT250-16PBF](#) [M8340109M6801GGD03](#) [NTCALUG01A103F291L](#) [ITU1341SM3](#) [VS-MBRB1545CTPBF](#) [1KAB100E](#) [1KAB20E](#) [CP0005150R0JE1490](#) [S472M69Z5UR84K0R](#) [MKP1848C65090JY5L](#) [562R5GAD47RR](#)  
[CRCW1210360RFKEA](#) [VSMF4720-GS08](#) [TSOP34438SS1V](#) [CRCW04024021FRT7](#) [001789X](#) [CRCW08054K00FKTA](#) [LVR10R0200FE03](#)  
[CRCW12063K30FKEAHP](#) [009923A](#) [CRCW2010331JR02](#) [CRCW25128K06FKEG](#) [CS6600552K000B8768](#) [CSC07A0110K0GPA](#)  
[M34C156K100BZSS](#) [M39003/01-2289](#) [M39003/01-2784](#) [M39006/25-0133](#) [M39006/25-0228](#) [M64W101KB40](#) [M64Z501KB40](#)  
[CW001R5000JS73](#) [CW0055R000JE12](#) [CW0056K800JB12](#) [CW0106K000JE73](#) [672D826H075EK5C](#) [CWR06JC105KC](#) [CWR06NC475JC](#)  
[MAL219699001E3](#) [MCRL007035R00JHB00](#) [92MT80KPBF](#) [PTF56100K00QYEK](#) [PTN0805H1502BBTR1K](#) [RCWL1210R130JNEA](#)  
[RH005220R0FE02](#) [RH005330R0FC02](#) [RH010R0500FC02](#) [132B20103](#)