



FUSES FOR SEMICONDUCTOR PROTECTION

EUROPEAN STANDARD


SIZES 000 AND 00

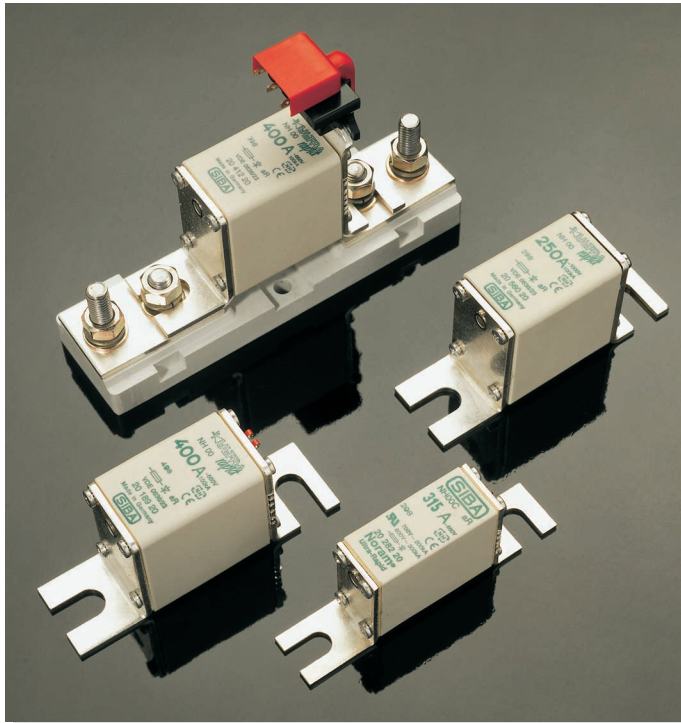

Class: aR
Voltage rating: AC 660 V – AC 1000 V
Current rating: 10 A to 400 A
Approvals: 
Standards: DIN 43653
IEC 60269-1 and -4
DIN VDE 0636-40
UL 248-13

Features / Benefits

- ▶ Extremely high interrupting rating 100 kA – 300 kA
- ▶ Voltage rating AC 660 V – AC 1000 V
- ▶ Protection of Power Semiconductors according to IEC 60269-1 and -4
- ▶ Complies with DIN 43653 – sizes 000 and 00 with or without Topindicator and trip microswitch
- ▶ aR class 10 A–400 A according to IEC 60269-4 and DIN VDE 0636-40
- ▶ Fuse Bases and Accessories are available

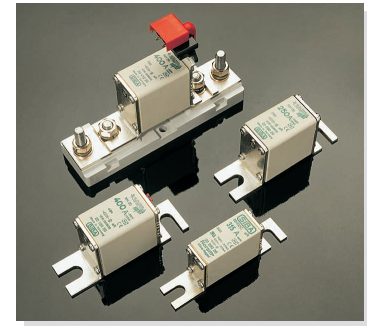

FUSES FOR SEMICONDUCTOR PROTECTION


EUROPEAN STANDARD

SIZES 000 AND 00

Selection Guide

Size	Rated Voltage AC	Fixing Center	Indicator *	Part No. Type	Selector Guide Page	Techn. Data Page
000	660 V	3,15" (80 mm)	with Topindicator	20 282 04	URB 3	URB 10
000	660 V	3.15" (80 mm)	without Topindicator	20 282 41	URB 3	URB 10
000	660 V	3.15" (80 mm)	with microswitch fitting	20 558 04	URB 4	URB 10
000	690/700 V	3.15" (80 mm)	with Topindicator	20 282 20	URB 3	URB 11
000	690/700 V	3.15" (80 mm)	without Topindicator	20 282 21	URB 3	URB 11
000	690/700 V	3.15" (80 mm)	with microswitch fitting	20 558 20	URB 4	URB 11
00	660 V	3.15" (80 mm)	with Topindicator	20 189 04	URB 5	URB 12
00	660 V	3.15" (80 mm)	without Topindicator	20 189 41	URB 5	URB 12
00	660 V	3.15" (80 mm)	with microswitch fitting	20 412 04	URB 6	URB 12
00	690/700 V	3.15" (80 mm)	with Topindicator	20 189 20	URB 5	URB 13
00	690/700 V	3.15" (80 mm)	without Topindicator	20 189 21	URB 5	URB 13
00	690/700 V	3.15" (80 mm)	with microswitch fitting	20 412 20	URB 7	URB 13
00	1000 V	3.15" (80 mm)	with Topindicator	20 560 20	URB 8	URB 14
00	1000 V	3.15" (80 mm)	without Topindicator	20 560 21	URB 8	URB 14
00	1000 V	3.15" (80 mm)	with microswitch fitting	20 562 20	URB 9	URB 14
Fuse Base	1000 V			21 189 01		URB 15
Microswitch	250 V			28 002 05		URB 15

* Minimum operating voltage for Topindicator 6.5 V

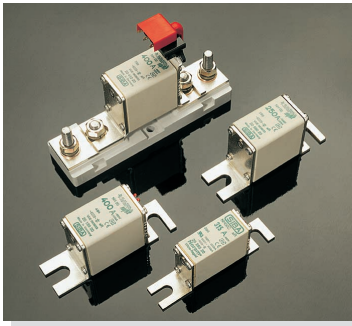


FUSES FOR SEMICONDUCTOR PROTECTION
EUROPEAN STANDARD

SIZES 000 AND 00

Size 00	Rated voltage AC 690/700 V	Standard DIN 43653
--------------------------	---	-------------------------------------

Rated current	Part No. Topindicator and fitting for microswitch	UL Rec.	Weight (kg/100)	Pack
32 A	20 412 20		21	3
35 A	20 412 20		21	3
40 A	20 412 20		21	3
50 A	20 412 20		21	3
63 A	20 412 20		21	3
80 A	20 412 20		21	3
100 A	20 412 20		21	3
125 A	20 412 20		21	3
160 A	20 412 20	✓	21	3
200 A	20 412 20	✓	21	3
250 A	20 412 20	✓	21	3
315 A	20 412 20	✓	21	3
350 A	20 412 20	✓	21	3
400 A	20 412 20		21	3

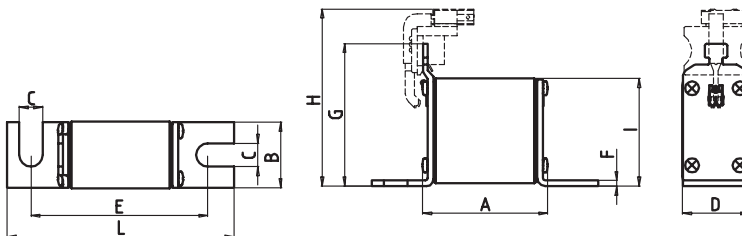


A	2.17" (55 mm)	F	0.10" (2.5 mm)
B	1.13" (28.8 mm)	G	2.48" (63 mm)
C	0.40" (10.3 mm)	H	3.15" (80 mm)
D	1.16" (29.5 mm)	I	1.54" (39 mm)
E	3.07" (78 mm)	L_(max)	4.13" (105 mm)





Size 00	Rated voltage AC 690/700 V	Operating class aR	Rated breaking capacity 600 V / 300 kA · 700 V / 200 kA
--------------------------	---	-------------------------------------	--

Rated current	Part No. with Topindicator	Part No. without Topindicator	Part No. Topindicator and fitting for microswitch	Power loss W	Pre-arcing I ² t-value A ² s	Total I ² t-value @ 660 V A ² s
35 A	20 189 20	20 189 21	20 412 20	8	66	360
40 A	20 189 20	20 189 21	20 412 20	10	90	500
50 A	20 189 20	20 189 21	20 412 20	12	140	770
63 A	20 189 20	20 189 21	20 412 20	14	250	1,400
80 A	20 189 20	20 189 21	20 412 20	17	470	2,600
100 A	20 189 20	20 189 21	20 412 20	21	730	4,000
125 A	20 189 20	20 189 21	20 412 20	25	1,300	7,200
160 A	20 189 20	20 189 21	20 412 20	31	2,800	15,400
180 A	20 189 20	20 189 21	20 412 20	34	4,200	23,100
200 A	20 189 20	20 189 21	20 412 20	37	5,000	27,500
250 A	20 189 20	20 189 21	20 412 20	44	8,500	46,800
315 A	20 189 20	20 189 21	20 412 20	53	15,600	86,000
350 A	20 189 20	20 189 21	20 412 20	57	20,000	110,000
400 A	20 189 20	20 189 21	20 412 20	68	28,400	156,000


Cut-off-characteristics

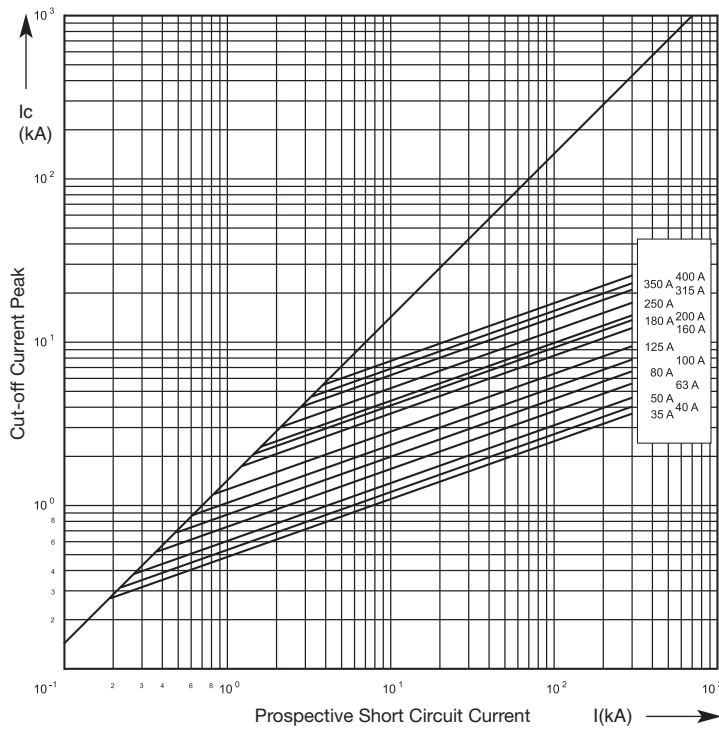

Time / Current Characteristics

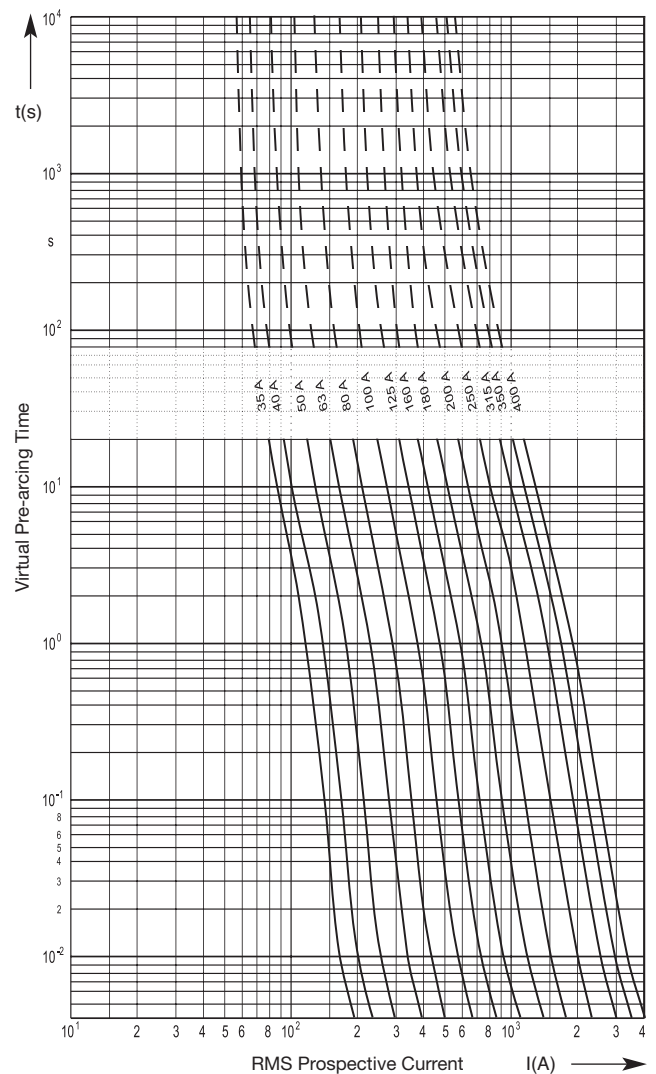


Fuse Base 400 A	Size 000 and 00	Rated voltage AC 1000 V	Standard DIN 43653
---------------------------	---------------------------	-----------------------------------	------------------------------

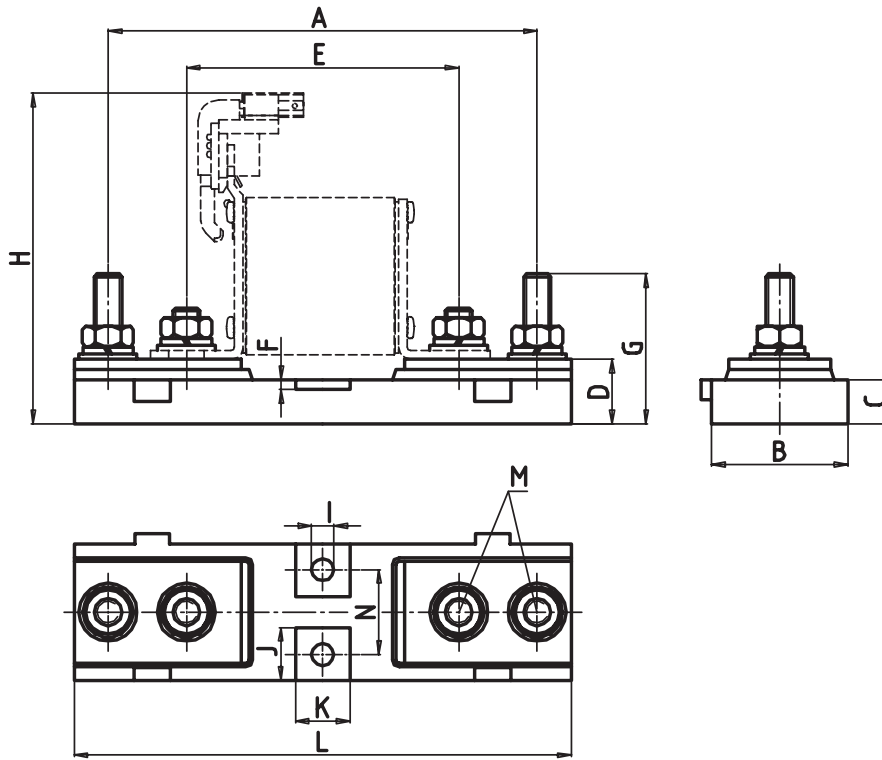

RU 600 V
Part No. 21 189 01
Rated Current: 400 A
Rated Power Acceptance: 34 W
Nut Torque: 22 Nm

A	4.96" (126 mm)
B	1.57" (40 mm)
C	0.50" (13 mm)
D	0.75" (19 mm)
E	3.15" (80 mm)
F	0.12" (3 mm)
G	1.73" (44 mm)
H	3.82" (97 mm)
I	0.26" (6,5 mm)
J	0.60" (15,5 mm)
K	0.63" (16 mm)
L_(max)	5.75" (146 mm)
M	M 8
N	0.98" (25 mm)

Microswitch	Rated voltage AC 250 V
--------------------	----------------------------------

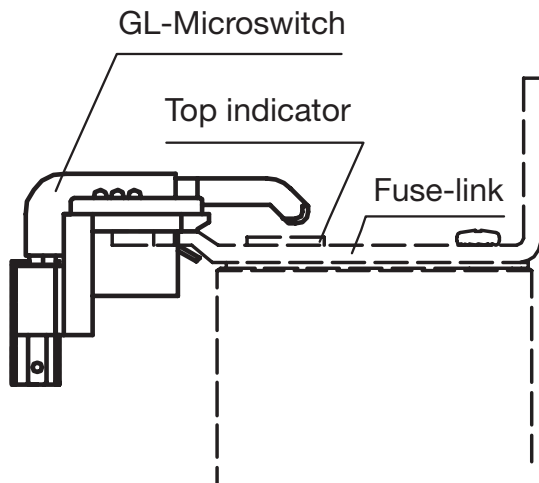

Part No. 28 002 05

Rated voltage	Breaking capacity	
	non inductive Load	inductive Load
AC 250 V	5 A	5 A

Rated voltage	Breaking capacity	
	non inductive Load	inductive Load (L/R = 25 ms)
DC 60 V	500 mA	200 mA
DC 24 V	2 A	2 A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Specialty Fuses](#) category:

Click to view products by [Siba](#) manufacturer:

Other Similar products are found below :

[63NZ02GL](#) [714125](#) [722134](#) [80NH00GR-6](#) [FWH-200A](#) [FWP-32A14F](#) [FWP-50](#) [HBM-25](#) [12LCT](#) [12TDLSJ63](#) [REN-3](#) [15.5CAVH2E](#) [ECF-2](#)
[ECF-4](#) [ECF-6](#) [170M0213](#) [170M1314](#) [170M1369-D](#) [170M3809D](#) [BK/F02A-2AS](#) [BK/F02B-1A](#) [N-2-1/2](#) [N-3-2/10](#) [NITD2](#) [20D16](#) [20D16SC](#)
[20D27FB](#) [KAA-3](#) [KAB-2](#) [KAB-30](#) [KAJ-60](#) [KAW-3](#) [2D16](#) [LKN-125B](#) [16D27SB](#) [170M1564D](#) [170M2616](#) [170M2668](#) [170M4161](#)
[170M4241](#) [170M4699](#) [ESD63](#) [ABS-25](#) [ABS-30](#) [ABS-8](#) [ACF-15](#) [ACF-30](#) [ACO-30](#) [SSD10](#) [200NH1M](#)