




JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD

SOT-23 Plastic-Encapsulate Transistors

2SA1037 TRANSISTOR (PNP)**FEATURES**

- Excellent h_{FE} linearity.
- Complements the 2SC2412

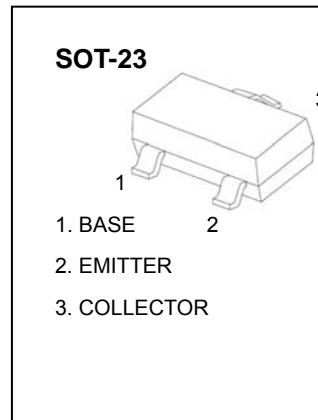MARKING : FQ, FR, FS**MAXIMUM RATINGS (T_a=25°C unless otherwise noted)**

Symbol	Parameter	Value	Unit
V _{CBO}	Collector-Base Voltage	-60	V
V _{CEO}	Collector-Emitter Voltage	-50	V
V _{EBO}	Emitter-Base Voltage	-6	V
I _c	Collector Current -Continuous	150	mA
P _c	Collector Power Dissipation	200	mW
T _J	Junction Temperature	150	°C
T _{stg}	Storage Temperature	-55-150	°C

ELECTRICAL CHARACTERISTICS (T_a=25°C unless otherwise specified)









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage	V _{(BR)CBO}	I _c =-50μA,I _e =0	-60			V
Collector-emitter breakdown voltage	V _{(BR)CEO}	I _c =-1mA,I _b =0	-50			V
Emitter-base breakdown voltage	V _{(BR)EBO}	I _e =-50μA,I _c =0	-6			V
Collector cut-off current	I _{CBO}	V _{CB} =-60V,I _e =0			-0.1	μA
Emitter cut-off current	I _{EBO}	V _{EB} =-6V,I _c =0			-0.1	μA
DC current gain	h _{FE}	V _{CE} =-6V,I _c =-1mA	120		560	
Collector-emitter saturation voltage	V _{CE(sat)}	I _c =-50mA,I _b =-5mA			-0.5	V
Transition frequency	f _T	V _{CE} =-12V,I _c =-2mA,f=30MHz		140		MHz
Collector output capacitance	C _{ob}	V _{CB} =-12V,I _e =0,f=1MHz		4.0	5.0	pF

CLASSIFICATION OF h_{FE}

Rank	Q	R	S
Range	120 - 270	180 - 390	270 - 560

Typical Characteristics

2SA1037

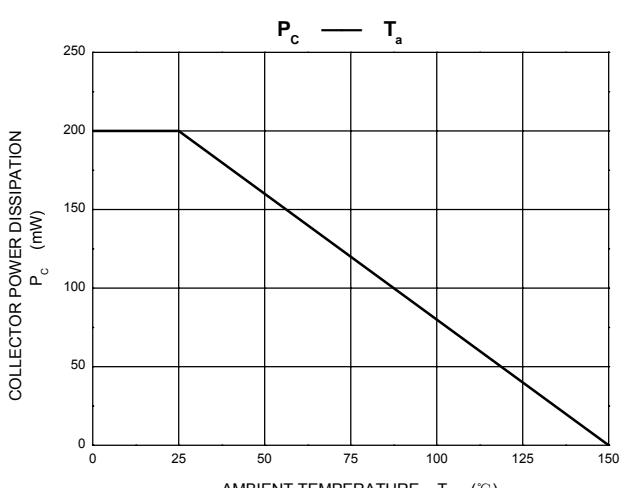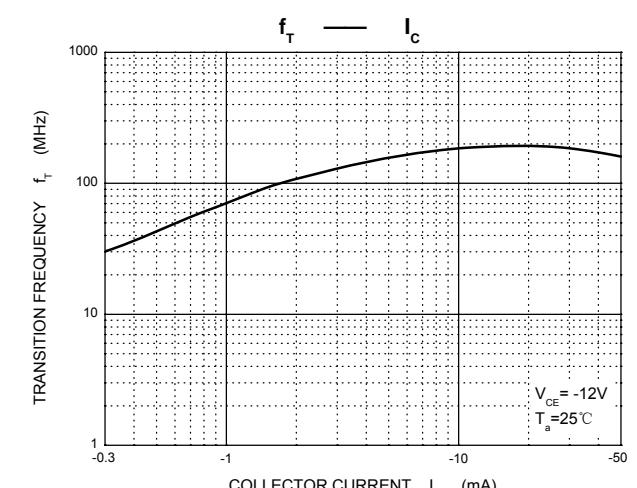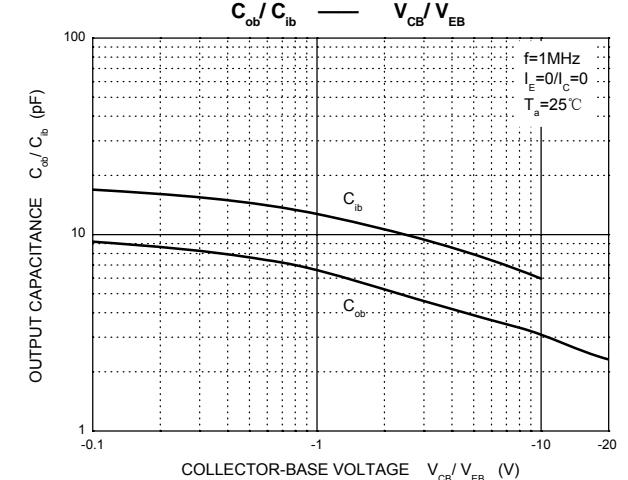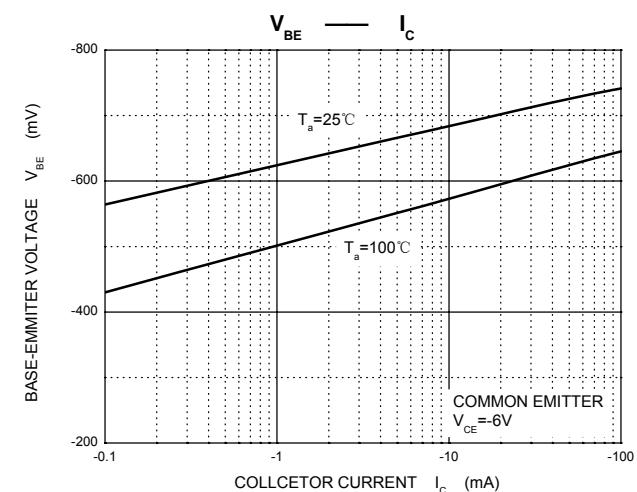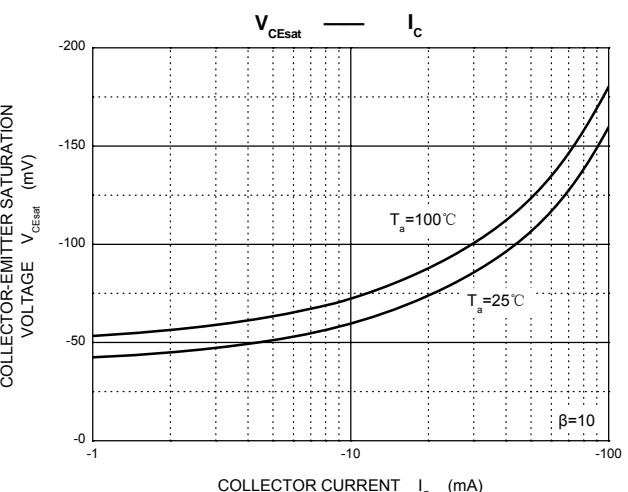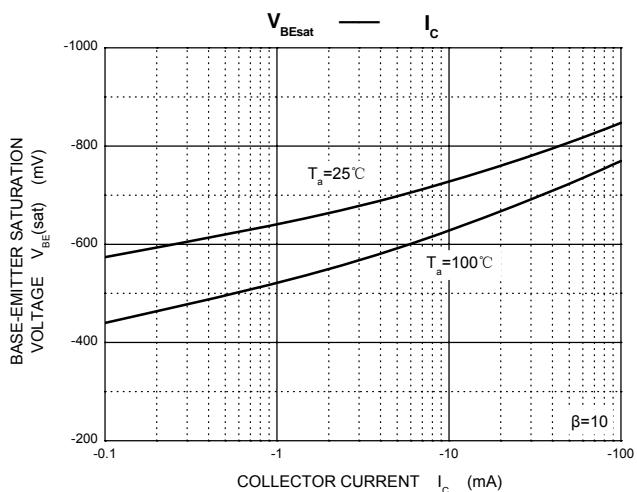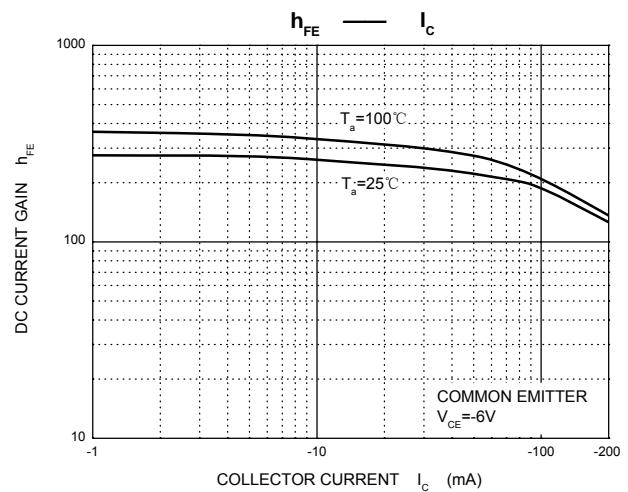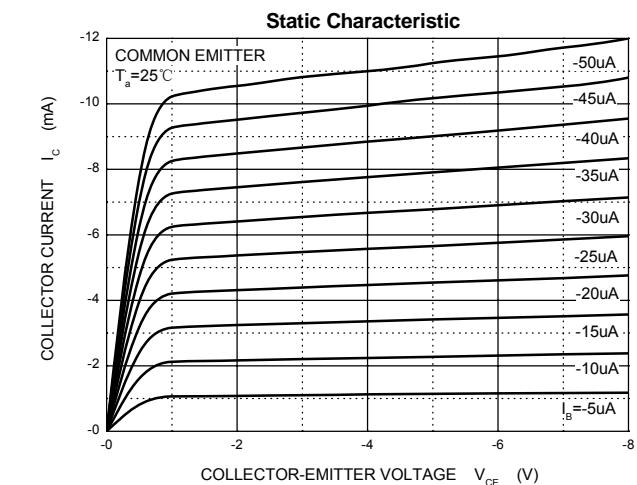

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Changjiang manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)
[MJE340](#) [US6T6TR](#) [NJK0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)
[NJK0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [STX83003-AP](#)