




SOD-323 Plastic-Encapsulate Diodes

B0520WS/B0530WS/B0540WS

SCHOTTKY BARRIER DIODE

SOD-323



FEATURES

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- High Conductance
- Also Available in Lead Free Version

MARKING: B0520WS: SD

B0530WS: SE

B0540WS: SF

Maximum Ratings @Ta=25°C

| Parameter | Symbol | B0520WS | B0530WS | B0540WS | Unit |
|--|-----------------|---------|----------|---------|------------|
| Peak repetitive peak reverse voltage | V_{RRM} | | | | |
| Working peak reverse voltage | V_{RWM} | 20 | 30 | 40 | V |
| DC blocking voltage | V_R | | | | |
| RMS reverse voltage reverse voltage (DC) | $V_{R(RMS)}$ | 14 | 21 | 28 | V |
| Average rectified output current | I_o | | 0.5 | | A |
| Forward current surge peak | I_{FSM} | | 5.5 | | A |
| Power dissipation | P_D | | 200 | | mW |
| Thermal resistance junction to ambient | $R_{\theta JA}$ | | 500 | | °C/W |
| Junction temperature | T_j | | 125 | | °C |
| Storage temperature | T_{STG} | | -55~+150 | | °C |
| Voltage rate of change | dv/dt | | 1000 | | V/ μ s |


Electrical Characteristics @Ta=25°C

| Parameter | Symbol | B0520WS | B0530WS | B0540WS | Unit | Conditions |
|-------------------------------------|------------|---------|---------|---------|---------|-----------------|
| Minimum reverse b-breakdown voltage | $V_{(BR)}$ | 20 | -- | -- | V | $I_R=250\mu A$ |
| | | -- | 30 | -- | | $I_R=500\mu A$ |
| | | -- | -- | 40 | | $I_R=20\mu A$ |
| Forward voltage | V_{F1} | 0.33 | 0.36 | -- | V | $I_F=0.1A$ |
| | V_{F2} | 0.39 | 0.45 | 0.510 | | $I_F=0.5A$ |
| | V_{F3} | -- | -- | 0.62 | | $I_F=1A$ |
| Reverse current | I_{R1} | 75 | -- | -- | μA | $V_R=10V$ |
| | I_{R2} | -- | 80 | -- | | $V_R=15V$ |
| Reverse current | I_{R3} | 250 | 100 | 10 | μA | $V_R=20V$ |
| | I_{R4} | -- | 500 | -- | | $V_R=30V$ |
| | I_{R5} | -- | -- | 20 | | $V_R=40V$ |
| Capacitance between terminals | C_T | 170 | 170 | 170 | pF | $V_R=0, f=1MHz$ |


Typical Characteristics

B0540WS


Forward Characteristics

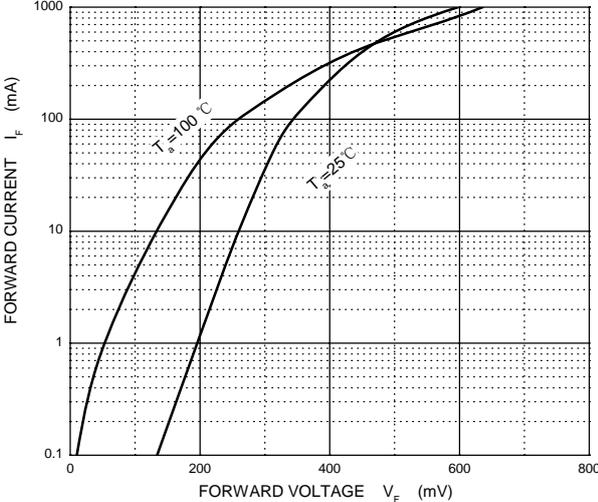


Reverse Characteristics

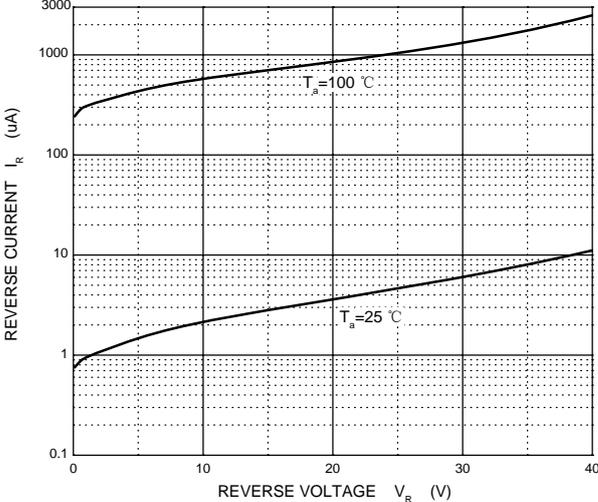

Capacitance Characteristics

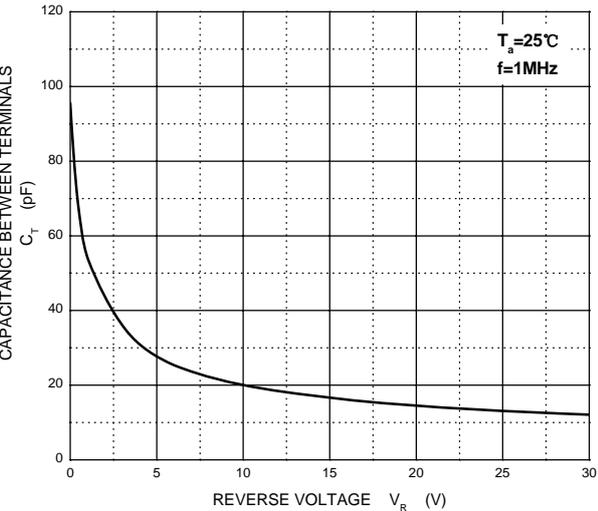

Power Derating Curve

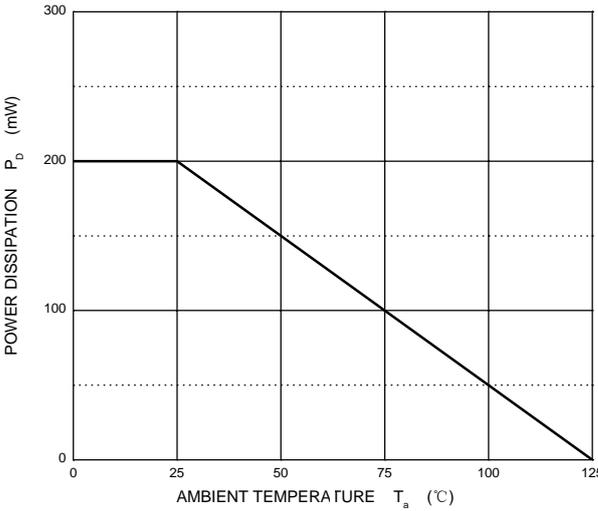

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [Changjiang](#) manufacturer:

Other Similar products are found below :

[CUS06\(Te85L,Q,M\)](#) [MA4E2039](#) [D1FH3-5063](#) [MBR0530L-TP](#) [MBR10100CT-BP](#) [MBR30H100MFST1G](#) [MMBD301M3T5G](#) [PMAD1103-LF](#) [PMAD1108-LF](#) [RB160M-50TR](#) [RB520S-30](#) [RB551V-30](#) [DD350N18K](#) [DZ435N40K](#) [DZ600N16K](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#) [IDL02G65C5XUMA1](#) [NSR05F40QNXT5G](#) [NSVR05F40NXT5G](#) [JANS1N6640](#) [SB07-03C-TB-H](#) [SB1003M3-TL-W](#) [SBAT54CWT1G](#) [SBM30-03-TR-E](#) [SBS818-TL-E](#) [SK32A-LTP](#) [SK33A-TP](#) [SK34A-TP](#) [SK34B-TP](#) [SMD1200PL-TP](#) [ACDBN160-HF](#) [SS3003CH-TL-E](#) [STPS30S45CW](#) [PDS3100Q-7](#) [GA01SHT18](#) [CRS10I30A\(Te85L,QM\)](#) [MBR1240MFST1G](#) [MBRB30H30CT-1G](#) [BAS28E6433HTMA1](#) [BAS 70-02L E6327](#) [HSB123JTR-E](#) [JANTX1N5712-1](#) [VS-STPS40L45CW-N3](#) [DD350N12K](#) [SB007-03C-TB-E](#) [SB10015M-TL-E](#) [SB1003M3-TL-E](#) [SK110-LTP](#)