



Slide Switches

HOW TO ORDER SEE PAGE 1



SPECIFICATIONS:

Contact rating: see page 1 or 38

Contact resistance: $10m\Omega$ max. initial @ 2-4VDC, 100mA for both

coin silver and gold plated contacts

Electrical life: 30.000 actuations at full load

Insulation resistance: $1.000M\Omega$ min.

Dielectric strengths: 1.500V RMS @ sea level

Operation temperature: -30 °C to 85 °C

MATERIALS:

Slide handel: nylon (UL 94V-0)

Housing: stainless steel


Case: diallyl phthalate (DAP) (UL 94V-0)

Terminal seal: epoxy

Switch support: brass, tin plated Contact materials: see page 1 or 38

SPDT_TYPE_1105S1M1RE2



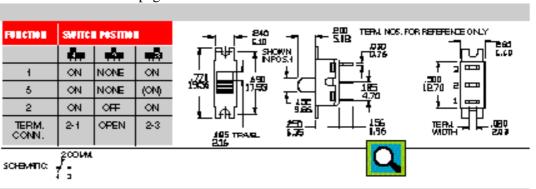


DPDT_TYPE_2105S1M1QE2



FUNCTION	SMITCE POSITION			* ⁷⁷⁰
		MS.	***	1271 3-04N
1	ON	NONE	ON	
2	ON	OFF	ON	
TERM. CONN.	2-1 5-4	OPEN	2-3 5-6	590 - 195 - 195 - 196 - 197 -
9 0-ЕИЧТ С	200 /4 /		ι	Q are


SPDT_TYPE_1105S1M6RE2



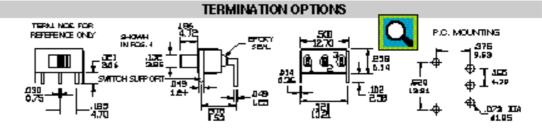

DPDT_TYPE_2105S1M6RE2



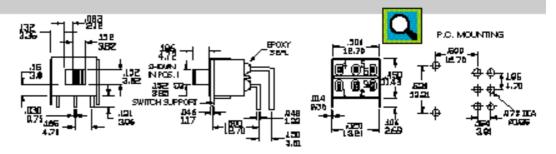



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Slide Switches category:

Click to view products by IC Switches manufacturer:

Other Similar products are found below:

6-1437581-1 M43R MHS123K15D MHSS1104A MMD GH49S010001 GH49WW00001 1437576-8 EPS1PC1 1825074-1 1825160-3

1825167-2 25139NLDB 25436NLDB 25449NAH 25536NA L101011ML04B SLB1240R45 SLSA12004 1825078-1 1825080-4 1825081-1

1825269-1 1825270-2 STS141RA04 T2215BEN506 GF-124-0204 GH46P000001 GH46W000001 GH49P010001 25339NA 25436NLDH

CST91246FK TG36P000000 TG36P000050 47227LFE 49331L MHSS1105A 50208L HW4S-5LF22N3 L202091MS02Q 4-1437581-7

48BFSP3M2QT 49329L 1101M1S3ZB8E2 1-1437581-1 EG1218REDACTUATOR TG39W000000 1825075-1 TG36WS80065