



TO-92 Plastic-Encapsulate Transistors

BC327/ BC328

TRANSISTOR (PNP)

FEATURES

Power dissipation

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)


Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage BC327	-50	V
	BC328	-30	
V_{CEO}	Collector-Emitter Voltage BC327	-45	V
	BC328	-25	
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current -Continuous	-800	mA
P_C	Collector Power Dissipation	625	mW
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55-150	°C

TO-92

1. COLLECTOR

2. BASE

3. Emitter



ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$ unless otherwise specified)









Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
Collector-base breakdown voltage BC327 BC328	V_{CBO}	$I_C = -100\mu\text{A}, I_E = 0$	-50 -30			V
Collector-emitter breakdown voltage BC327 BC328	V_{CEO}	$I_C = -10\text{mA}, I_B = 0$	-45 -25			V
Emitter-base breakdown voltage	V_{EBO}	$I_E = -10\mu\text{A}, I_C = 0$	-5			V
Collector cut-off current BC327 BC328	I_{CBO}	$V_{CB} = -45\text{ V}, I_E = 0$ $V_{CB} = -25\text{V}, I_E = 0$			-0.1 -0.1	uA
Collector cut-off current BC327 BC328	I_{CEO}	$V_{CE} = -40\text{ V}, I_B = 0$ $V_{CE} = -20\text{ V}, I_B = 0$			-0.2 -0.2	uA
Emitter cut-off current	I_{EBO}	$V_{EB} = -4\text{ V}, I_C = 0$			-0.1	uA
DC current gain	$h_{FE(1)}$	$V_{CE} = -1\text{ V}, I_C = -100\text{mA}$	100		630	
	$h_{FE(2)}$	$V_{CE} = -1\text{ V}, I_C = -300\text{mA}$	40			
Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$I_C = -500\text{mA}, I_B = -50\text{mA}$			-0.7	V
Base-emitter saturation voltage	$V_{BE(\text{sat})}$	$I_C = -500\text{mA}, I_B = -50\text{mA}$			-1.2	V
Base-emitter voltage	V_{BE}	$V_{CE} = -1\text{ V}, I_C = -300\text{mA}$			-1.2	V
Transition frequency	f_T	$V_{CE} = -5\text{V}, I_C = -10\text{mA}$ $f = 100\text{MHz}$	260			MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = -10\text{V}, I_E = 0$ $f = 1\text{MHz}$		12		pF

CLASSIFICATION OF h_{FE}

Rank	16	25	40
Range	100-250	160-400	250-630

Typical Characteristics

BC327/BC328

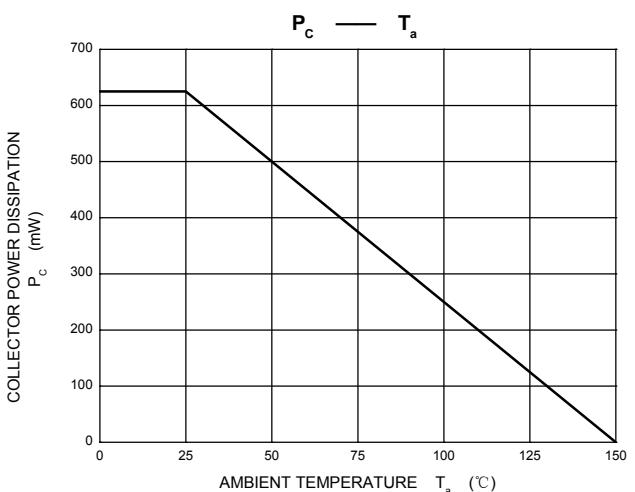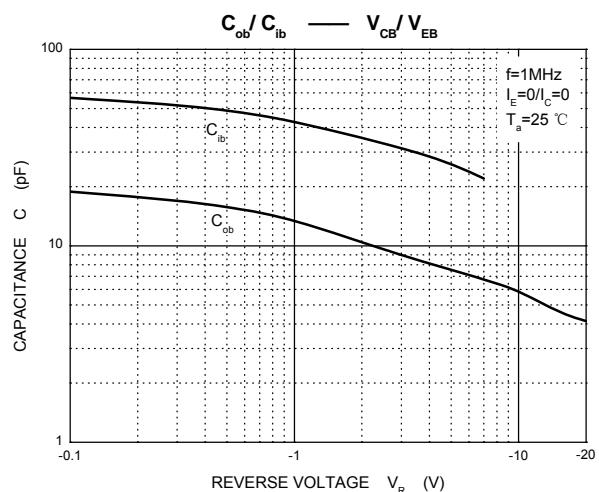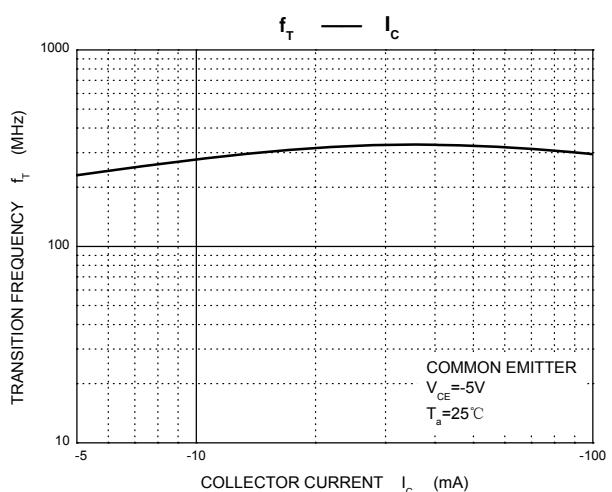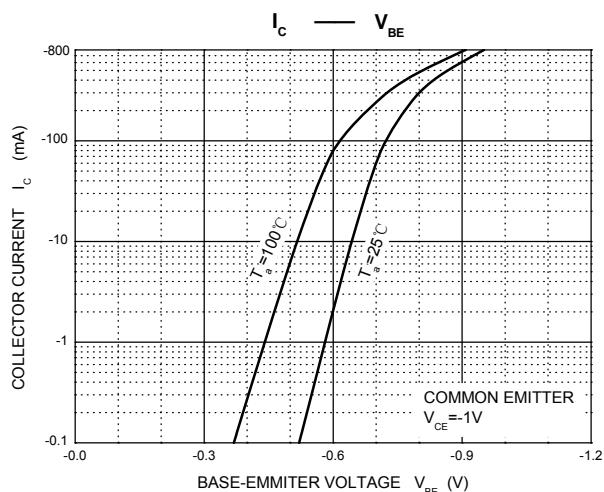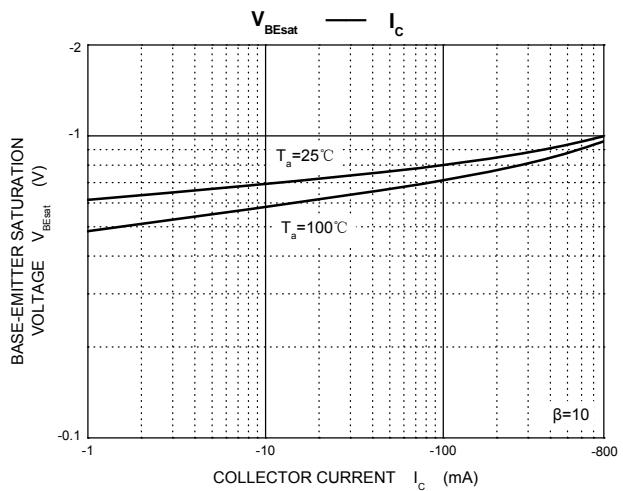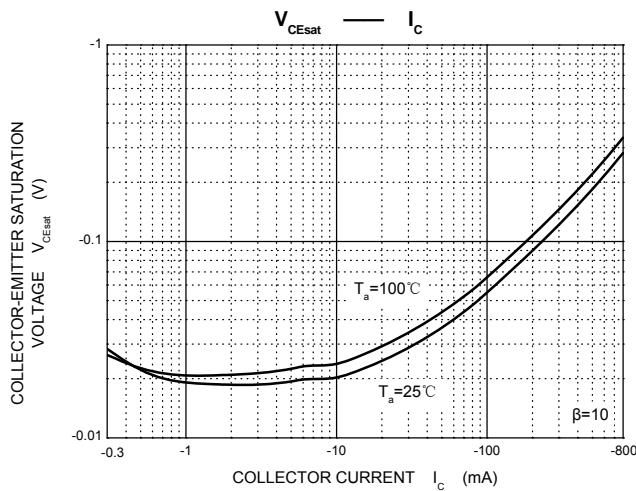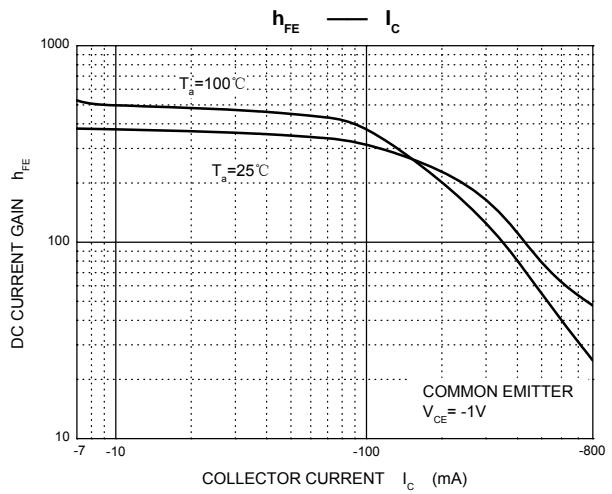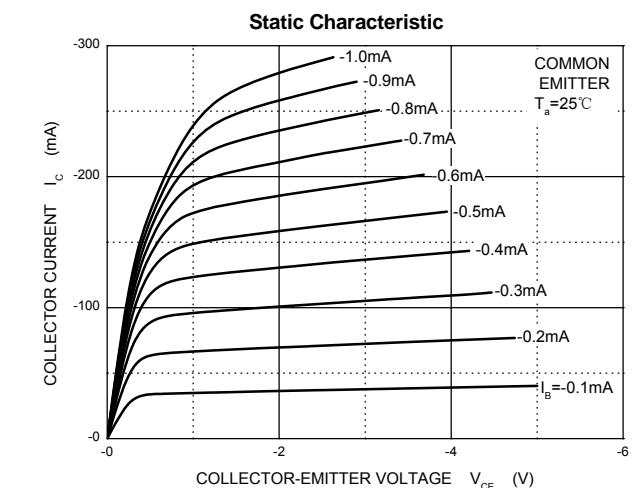

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Bipolar Transistors - BJT category:

Click to view products by Changjiang manufacturer:

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MJ15024/WS](#) [MJ15025/WS](#) [BC546/116](#) [BC556/FSC](#) [BC557/116](#) [BSW67A](#) [HN7G01FU-A\(T5L,F,T\)](#)
[NJVMJD148T4G](#) [NSVMMBT6520LT1G](#) [NTE187A](#) [NTE195A](#) [NTE2302](#) [NTE2330](#) [NTE2353](#) [NTE316](#) [IMX9T110](#) [NTE63](#) [NTE65](#)
[C4460](#) [SBC846BLT3G](#) [2SA1419T-TD-H](#) [2SA1721-O\(TE85L,F\)](#) [2SA1727TLP](#) [2SA2126-E](#) [2SB1202T-TL-E](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#)
[2SD2150T100R](#) [SP000011176](#) [FMC5AT148](#) [2N2369ADCSM](#) [2SB1202S-TL-E](#) [2SC2412KT146S](#) [2SC4618TLN](#) [2SC5490A-TL-H](#)
[2SD1816S-TL-E](#) [2SD1816T-TL-E](#) [CMXT2207 TR](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#) [BC557B](#) [TTC012\(Q\)](#) [BULD128DT4](#) [JANTX2N3810](#)
[Jantx2N5416](#) [US6T6TR](#) [KSF350](#) [068071B](#)