



JIANGSU CHANGJIANG ELECTRONICS TECHNOLOGY CO., LTD


SOT-23 Plastic-Encapsulate MOSFETs

CJ2302 N-Channel 20-V(D-S) MOSFET

FEATURE

TrenchFET Power MOSFET


SOT-23

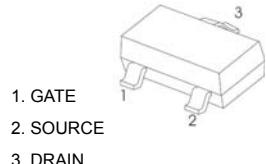

APPLICATIONS

- Load Switch for Portable Devices
- DC/DC Converter

MARKING: S2



Maximum ratings ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Value | Unit |
|--------------------------------------------------------------------|-----------------|-----------|--------------------|
| Drain-Source Voltage | V_{DS} | 20 | V |
| Gate-Source Voltage | V_{GS} | ± 8 | |
| Continuous Drain Current | I_D | 2.1 | A |
| Continuous Source-Drain Current(Diode Conduction) | I_S | 0.6 | |
| Power Dissipation | P_D | 0.35 | W |
| Thermal Resistance from Junction to Ambient ($t \leq 5\text{s}$) | $R_{\theta JA}$ | 357 | $^\circ\text{C/W}$ |
| Operating Junction | T_J | 150 | $^\circ\text{C}$ |
| Storage Temperature | T_{STG} | -55 ~+150 | |

Electrical characteristics ($T_a=25^\circ\text{C}$ unless otherwise noted)

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units |
|-------------------------------------------|-----------------------------|---------------------------------------------------------------------------------------------------------------------|------|-------|-----------|---------------|
| Static | | | | | | |
| Drain-source breakdown voltage | $V_{(\text{BR})\text{DSS}}$ | $V_{\text{GS}} = 0\text{V}, I_D = 10\mu\text{A}$ | 20 | | | V |
| Gate-threshold voltage | $V_{\text{GS}(\text{th})}$ | $V_{\text{DS}} = V_{\text{GS}}, I_D = 50\mu\text{A}$ | 0.65 | 0.95 | 1.2 | |
| Gate-body leakage | I_{GSS} | $V_{\text{DS}} = 0\text{V}, V_{\text{GS}} = \pm 8\text{V}$ | | | ± 100 | nA |
| Zero gate voltage drain current | I_{DSS} | $V_{\text{DS}} = 20\text{V}, V_{\text{GS}} = 0\text{V}$ | | | 1 | μA |
| Drain-source on-resistance ^a | $r_{\text{DS}(\text{on})}$ | $V_{\text{GS}} = 4.5\text{V}, I_D = 3.6\text{A}$ | | 0.045 | 0.060 | Ω |
| | | $V_{\text{GS}} = 2.5\text{V}, I_D = 3.1\text{A}$ | | 0.070 | 0.115 | |
| Forward transconductance ^a | g_{fs} | $V_{\text{DS}} = 5\text{V}, I_D = 3.6\text{A}$ | | 8 | | S |
| Diode forward voltage | V_{SD} | $I_S = 0.94\text{A}, V_{\text{GS}} = 0\text{V}$ | | 0.76 | 1.2 | V |
| Dynamic | | | | | | |
| Total gate charge | Q_g | $V_{\text{DS}} = 10\text{V}, V_{\text{GS}} = 4.5\text{V}, I_D = 3.6\text{A}$ | | 4.0 | 10 | nC |
| Gate-source charge | Q_{gs} | | | 0.65 | | |
| Gate-drain charge | Q_{gd} | | | 1.5 | | |
| Input capacitance ^b | C_{iss} | $V_{\text{DS}} = 10\text{V}, V_{\text{GS}} = 0\text{V}, f = 1\text{MHz}$ | | 300 | | pF |
| Output capacitance ^b | C_{oss} | | | 120 | | |
| Reverse transfer capacitance ^b | C_{rss} | | | 80 | | |
| Switching^b | | | | | | |
| Turn-on delay time | $t_{\text{d}(\text{on})}$ | $V_{\text{DD}} = 10\text{V}, R_L = 5.5\Omega, I_D \approx 3.6\text{A}, V_{\text{GEN}} = 4.5\text{V}, R_g = 6\Omega$ | | 7 | 15 | ns |
| Rise time | t_r | | | 55 | 80 | |
| Turn-off delay time | $t_{\text{d}(\text{off})}$ | | | 16 | 60 | |
| Fall time | t_f | | | 10 | 25 | |


Notes :

- a. Pulse Test : Pulse width $\leq 300\mu\text{s}$, duty cycle $\leq 2\%$.
- b. These parameters have no way to verify.




Typical Characteristics

CJ2302

Output Characteristics

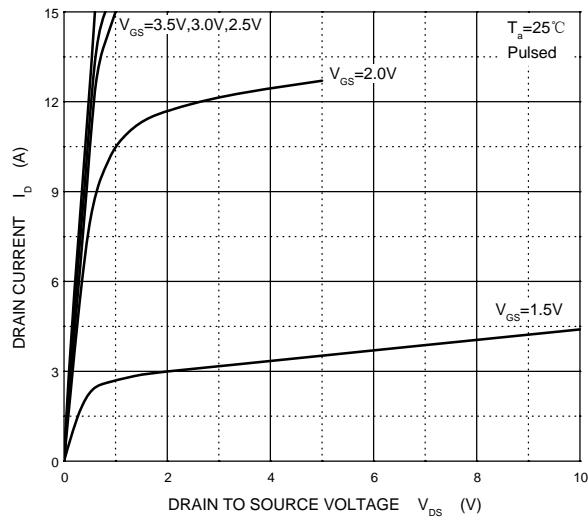

Transfer Characteristics

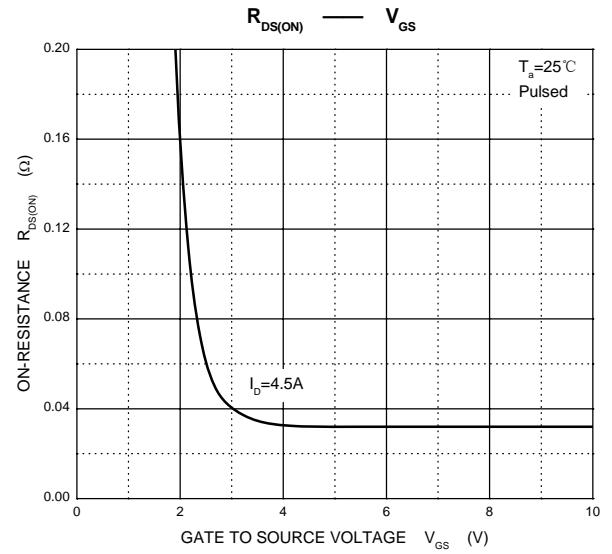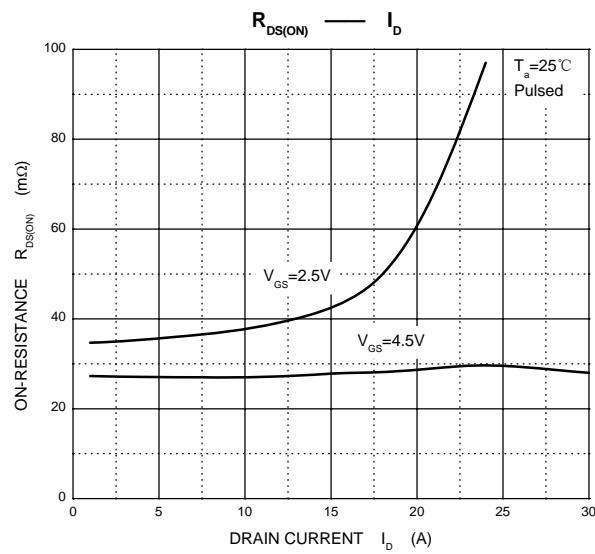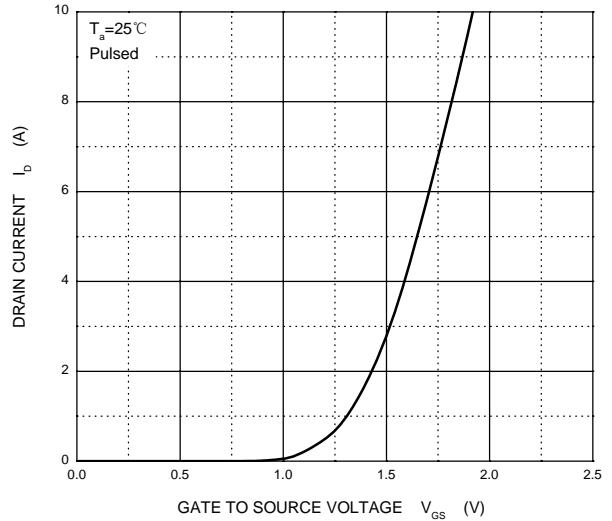

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MOSFET category:

Click to view products by Changjiang manufacturer:

Other Similar products are found below :

[614233C](#) [648584F](#) [MCH3443-TL-E](#) [MCH6422-TL-E](#) [FDPF9N50NZ](#) [FW216A-TL-2W](#) [FW231A-TL-E](#) [APT5010JVR](#) [NTNS3A92PZT5G](#)
[IRF100S201](#) [JANTX2N5237](#) [2SK2464-TL-E](#) [2SK3818-DL-E](#) [FCA20N60_F109](#) [FDZ595PZ](#) [STD6600NT4G](#) [FSS804-TL-E](#) [2SJ277-DL-E](#)
[2SK1691-DL-E](#) [2SK2545\(Q,T\)](#) [D2294UK](#) [405094E](#) [423220D](#) [MCH6646-TL-E](#) [TPCC8103,L1Q\(CM](#) [367-8430-0972-503](#) [VN1206L](#)
[424134F](#) [026935X](#) [051075F](#) [SBVS138LT1G](#) [614234A](#) [715780A](#) [NTNS3166NZT5G](#) [751625C](#) [873612G](#) [IRF7380TRHR](#)
[IPS70R2K0CEAKMA1](#) [RJK60S3DPP-E0#T2](#) [RJK60S5DPK-M0#T0](#) [APT5010JVFR](#) [APT12031JFLL](#) [APT12040JVR](#) [DMN3404LQ-7](#)
[NTE6400](#) [JANTX2N6796U](#) [JANTX2N6784U](#) [JANTXV2N5416U4](#) [SQM110N05-06L-GE3](#) [SIHF35N60E-GE3](#)