


GaAlAs Infrared Emitting Diodes

T-1 $\frac{3}{4}$ (5 mm) Plastic Package — 880 nm

VTE1291-1H, 1291-2H



PACKAGE DIMENSIONS inch (mm)

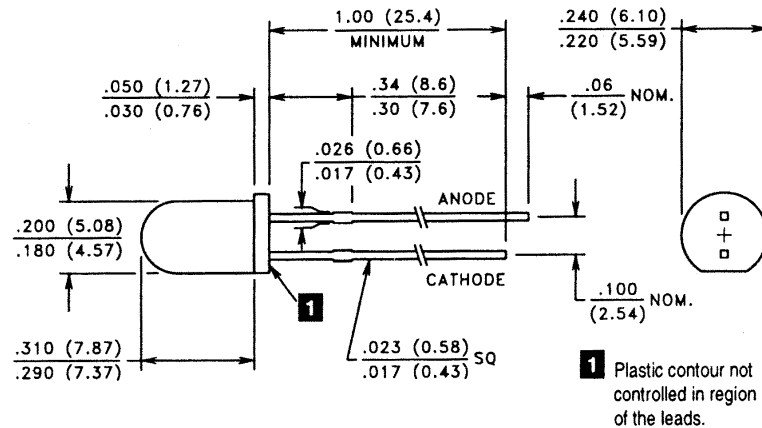

CASE 26 T-1 $\frac{3}{4}$ (5 mm)
CHIP SIZE: .015" x .015"

DESCRIPTION

This narrow beam angle 5 mm plastic packaged emitter contains a double wirebonded, GaAlAs, 880 nm IRED chip. This cost effective design is well suited for dc or high current pulse applications. This device is a UL recognized component for smoke alarm applications (UL file #S3506).

ABSOLUTE MAXIMUM RATINGS @ 25°C (unless otherwise noted) ■

Maximum Temperatures		Maximum Reverse Voltage:	5.0V
Storage and Operating:	-40°C to 100°C	Maximum Reverse Current @ $V_R = 5V$:	10 μA
Continuous Power Dissipation:	200 mW	Peak Wavelength (Typical):	880 nm
Derate above 30°C:	2.86 mW/°C	Junction Capacitance @ 0V, 1 MHz (Typ.):	23 pF
Maximum Continuous Current:	100 mA	Response Time @ $I_F = 20$ mA	
Derate above 30°C:	1.43 mA/°C	Rise: 1.0 μs Fall: 1.0 μs	
Peak Forward Current, 10 μs , 100 pps:	2.5 A	Lead Soldering Temperature:	260°C
Temp. Coefficient of Power Output (Typ.):	-8%/°C	(1.6 mm from case, 5 seconds max.)	

ELECTRO-OPTICAL CHARACTERISTICS @ 25°C (See also GaAlAs curves, pages 108-110)

Part Number ■	Output						Forward Drop		Half Power Beam Angle $\theta_{1/2}$ Typ.	
	Irradiance				Radiant Intensity	Total Power	Test Current	V_F		
	E_e		Condition		I_e	P_O	I_{FT}	@ I_{FT}		
	mW/cm ²		distance	Diameter	mW/sr	mW	mA (Pulsed)	Volts		
	Min.	Typ.	mm	mm	Min.	Typ.	Typ.	Max.		
VTE1291-1H	2.5	3.3	36	6.4	32	20	100	1.5	2.0	$\pm 12^\circ$
VTE1291-2H	5.0	6.5	36	6.4	65	25	100	1.5	2.0	$\pm 12^\circ$

■ Refer to General Product Notes, page 2.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Infrared Emitters - High Power category](#):

Click to view products by [Excelitas manufacturer](#):

Other Similar products are found below :

[IR19-315C/TR8](#) [SFH 4030](#) [SFH 4060](#) [HSM8-V380](#) [HSM9-V380](#) [SFH 5750](#) [PK2S-2KJE-A](#) [PK2S-2LJE-A](#) [PK2S-3KJE-A](#) [PK2S-3KKE-A](#)
[PK2S-3LJE-A](#) [PK2S-4KJE-A](#) [AREQ-90C0-00000](#) [AREQ-80C0-00000](#) [SFH 4775S A01](#) [SST-10-IRD-B90H-S810](#) [SFH 4727A](#) [SFH 4726AS](#)
[SFH 4717AS](#) [AREQ-8020-00000](#) [HR5P-N3FB-00000](#) [HR5P-N2FB-00000](#) [HR5P-N3CB-00000](#) [HR5P-N2CB-00000](#) [HR5P-N3CA-00000](#)
[HR5P-N2CA-00000](#) [HR5P-N2FA-00000](#) [HR5P-N3FA-00000](#) [VSMY2853SLX01](#) [VSMY2853RGX01](#) [VSMY2853GX01](#) [VSMY2850GX01](#)
[IN-P281ASGHIR](#) [IN-P281ASGIR](#) [QEE123](#) [HSDL-4400#011](#) [C3535SIR2C-2B](#) [KM-4457F3C](#) [L-53F3BT](#) [VTE1291W-2H](#) [LL-304IRC4B-](#)
[2AD](#) [LL-503HIRT2E-1CC](#) [LL-503IRC2E-2AC](#) [LL-503IRC2V-2AD](#) [LL-503IRT2E-2AC](#) [LL-503IRT2E-2AE](#) [LL-503SIRC2E-1BD](#) [LL-](#)
[503SIRC2H-1BE](#) [LL-S170IRC-2A](#) [SFH 4259](#)