

## Alternate Source/ Second Source Photodiodes



#### PACKAGE DIMENSIONS inch (mm)

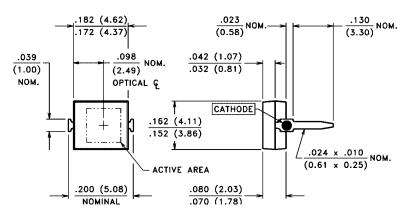

CASE 22 MINI DIP CHIP ACTIVE AREA: .012 in<sup>2</sup> (7.45 mm<sup>2</sup>)

#### PRODUCT DESCRIPTION

Planar silicon photodiode in a transparent molded plastic package. Suitable for direct mounting to P.C.B. Arrays can be formed by positioning these devices side by side. These photodiodes are designed to provide excellent sensitivity at low levels of irradiance.

Storage Temperature:	-20°C to 80°C
Operating Temperature:	-20°C to 80°C

SYMBOL	CHARACTERISTIC TEST CONDITIONS	VTD34H				
		TEST CONDITIONS	Min.	Тур.	Max.	UNITS
I <sub>SC</sub>	Short Circuit Current	1000 Lux, 2850 K	50	70		μA
TC I <sub>SC</sub>	I <sub>SC</sub> Temperature Coefficient	2850 K		.20		%/°C
V <sub>OC</sub>	Open Circuit Voltage	H = 1000 Lux, 2850 K	300	365		mV
TC V <sub>OC</sub>	V <sub>OC</sub> Temperature Coefficient	2850 K		-2.0		mV/°C
I <sub>D</sub>	Dark Current	H = 0, V <sub>R</sub> = 10 V		2	30	nA
C	Junction Capacitance	@ 1 MHz, V <sub>R</sub> = 0 V		60		pF
t <sub>R</sub> /t <sub>F</sub>	Rise/Fall Time @ 1 kΩ Lead	VR = 10 V, 833 nm		50		nsec
S <sub>R</sub>	Sensitivity	@ Peak		0.60		A/W
λ <sub>range</sub>	Spectral Application Range		400		1100	nm
λ <sub>p</sub>	Spectral Response - Peak			900		nm
V <sub>BR</sub>	Breakdown Voltage		40			V
$\theta_{1/2}$	Angular Resp50% Resp. Pt.			±50		Degrees
NEP	Noise Equivalent Power		4.8 x 10 <sup>-14</sup>			W∕√Hz
D*	Specific Detectivity		5.7 x 10 <sup>12</sup>			cm√Hz/W

### **ELECTRO-OPTICAL CHARACTERISTICS @ 25°C**

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Photodiodes category:

Click to view products by Excelitas manufacturer:

Other Similar products are found below :

LTR-526AD LV0221CS-TLM-H OED-SP-7L LTR-536AB LTR-743DBM1-TA LV0223CV-TLM-H 67-21SYGC-S349-TR8 SAH500M1 SFH 2200 A01 BPW 34 S E9601 SFH 2713 SFH 2703 LTR-546AD BP 104 SR-Z BPV23FL BPW 34 BS-Z BPW 34 FAS BPW 34 FS IG17X1000S4I IG22X250S4I VTB9413BH VTD205H VTD205KH VTP1220FBH VTP1232FH VTP4085H 1541201EEA400 SFH 2400 OP913WSL OP955 OPR5913 PD15-21B/TR8 PD3122FE000F PD93-21C/TR8 LTR-536AD VTP8651H VTD206KH VTB1013H BPV23NF OP905 LTR-516AD BPW 34 FS-Z VTD34FH QSB34CGR SFH 2500 FA 3001032 3001048 ARRAYC-60035-64P-PCB SFH 2240 OPR2100T