




JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD

## TO-92 Plastic-Encapsulate Transistors


### KSD471A TRANSISTOR (NPN)

#### FEATURES

- Complement To KSB564A
- Low  $V_{CE(sat)}$

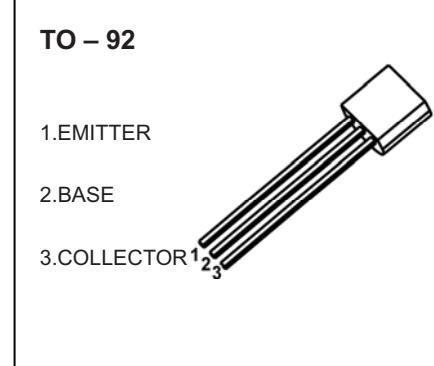


#### MARKING

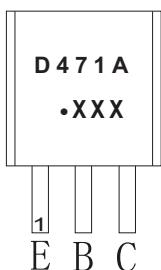

D471A=Device code  
Solid dot=Green molding compound device,  
if none,the normal device  
XXX=Code

#### Equivalent Circuit



#### ORDERING INFORMATION

Part Number	Package	Packing Method	Pack Quantity
KSD471A	TO-92	Bulk	1000pcs/Bag
KSD471A-TA	TO-92	Tape	2000pcs/Box

#### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$V_{CBO}$	Collector-Base Voltage	40	V
$V_{CEO}$	Collector-Emitter Voltage	30	V
$V_{EBO}$	Emitter-Base Voltage	5	V
$I_c$	Collector Current -Continuous	1	A
$P_D$	Collector Power Dissipation	800	mW
$R_{\theta JA}$	Thermal Resistance from Junction to Ambient	150	$^\circ\text{C} / \text{W}$
$T_J, T_{stg}$	Operation Junction and Storage Temperature Range	-55~+150	$^\circ\text{C}$

## ELECTRICAL CHARACTERISTICS

---






$T_a=25^\circ C$  unless otherwise specified

Parameter	Symbol	Test conditions	Min	Typ	Max	Unit
<b>Collector-base breakdown voltage</b>	$V_{(BR)CBO}$	$I_C=0.1mA, I_E=0$	40			V
<b>Collector-emitter breakdown voltage</b>	$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	30			V
<b>Emitter-base breakdown voltage</b>	$V_{(BR)EBO}$	$I_E=0.1mA, I_C=0$	5			V
<b>Collector cut-off current</b>	$I_{CBO}$	$V_{CB}=30V, I_E=0$			0.1	$\mu A$
<b>DC current gain</b>	$h_{FE}$	$V_{CE}=1V, I_C=100mA$	70		400	
<b>Collector-emitter saturation voltage</b>	$V_{CE(sat)}$	$I_C=1A, I_B=0.1A$			0.5	V
<b>Base-emitter saturation voltage</b>	$V_{BE(sat)}$	$I_C=1A, I_B=0.1A$			1.2	V
<b>Collector output capacitance</b>	$C_{ob}$	$V_{CB}=6V, I_E=0, f=1MHz$		16		pF
<b>Transition frequency</b>	$f_T$	$V_{CE}=6V, I_C=10mA$		130		MHz



### CLASSIFICATION OF $h_{FE}$

RANK	O	Y	G
RANGE	70-140	120-240	200-400

# Typical Characteristics

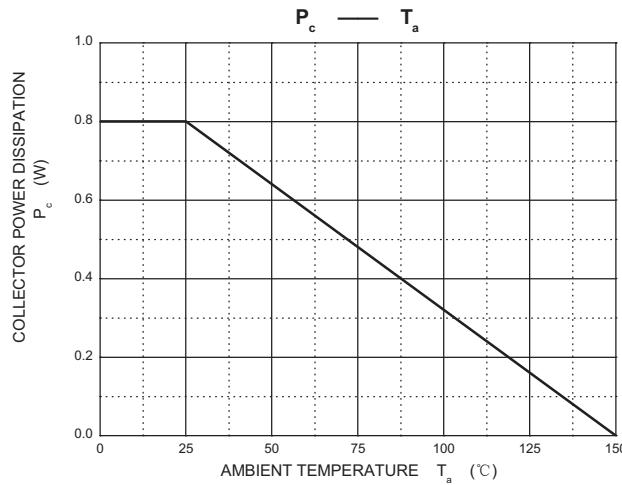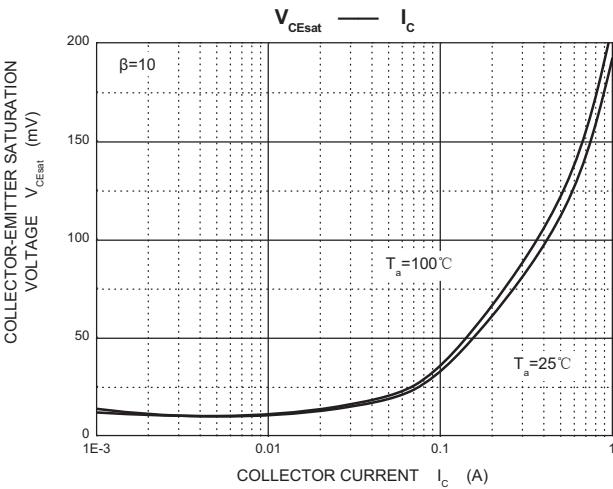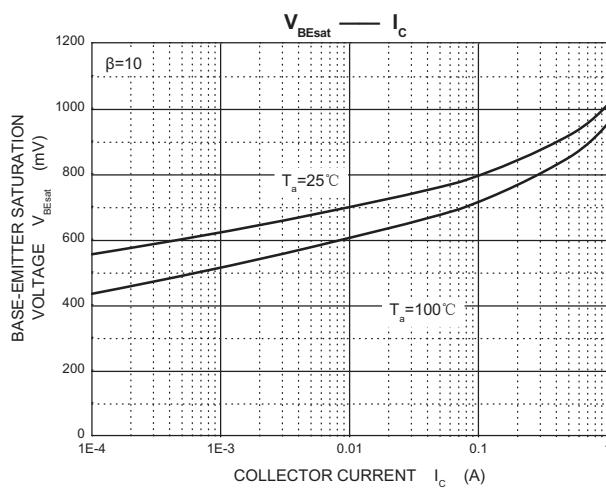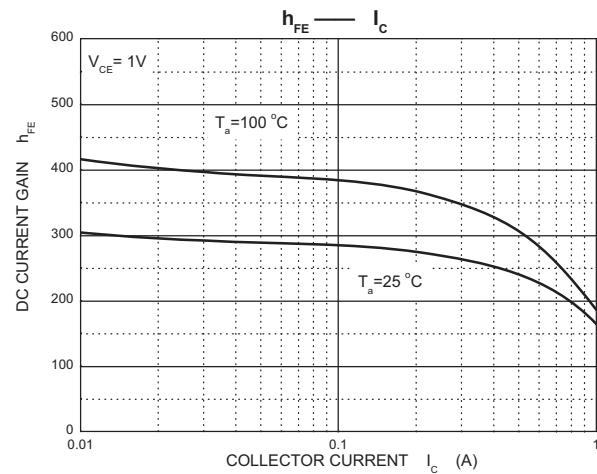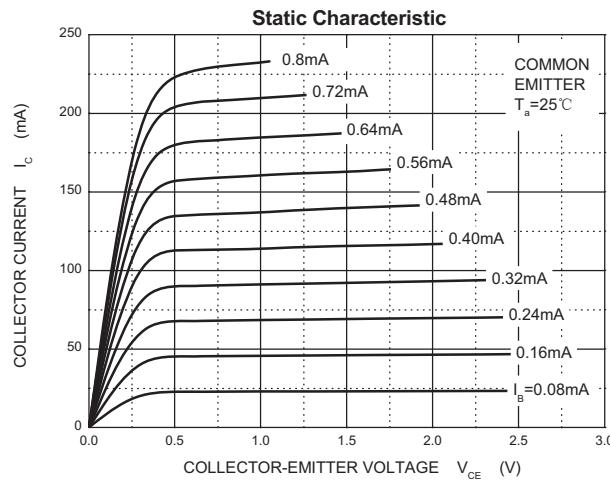


## TO-92 Package Outline Dimensions

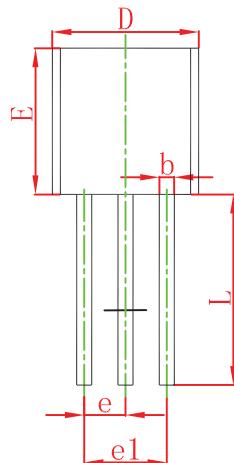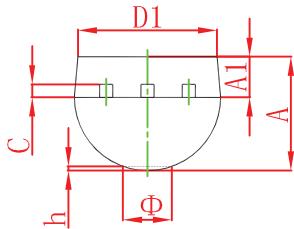

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	3.300	3.700	0.130	0.146
A1	1.100	1.400	0.043	0.055
b	0.380	0.550	0.015	0.022
c	0.360	0.510	0.014	0.020
D	4.300	4.700	0.169	0.185
D1	3.430		0.135	
E	4.300	4.700	0.169	0.185
e	1.270 TYP		0.050 TYP	
e1	2.440	2.640	0.096	0.104
L	14.100	14.500	0.555	0.571
Φ		1.600		0.063
h	0.000	0.380	0.000	0.015

## TO-92 Suggested Pad Layout

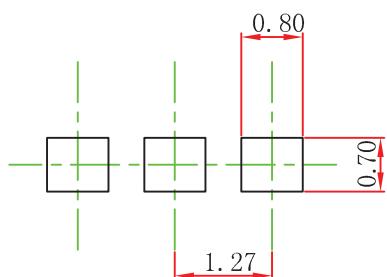

### Note:


1. Controlling dimension: in millimeters.
2. General tolerance:  $\pm 0.05$ mm.
3. The pad layout is for reference purposes only.

### NOTICE

JSCJ reserves the right to make modifications,enhancements,improvements,corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.


## TO-92 Tape and Reel

### TO-92 PACKAGE TAPING DIMENSION

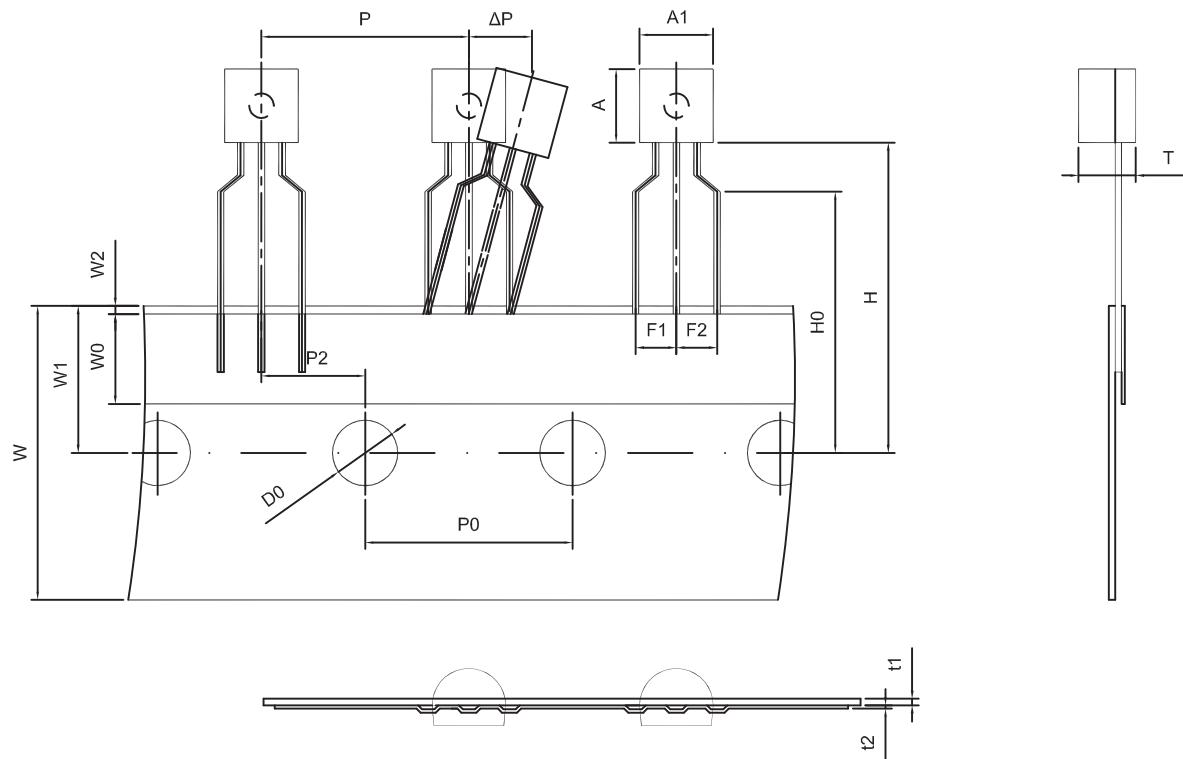

Dimensions are in millimeter

A1	A	T	P	P0	P2	F1	F2	W
4.5	4.5	3.5	12.7	12.7	6.35	2.5	2.5	18.0
W0	W1	W2	H	H0	D0	t1	t2	ΔP
6.0	9.0	1.0 MAX.	19.0	16.0	4.0	0.4	0.2	0

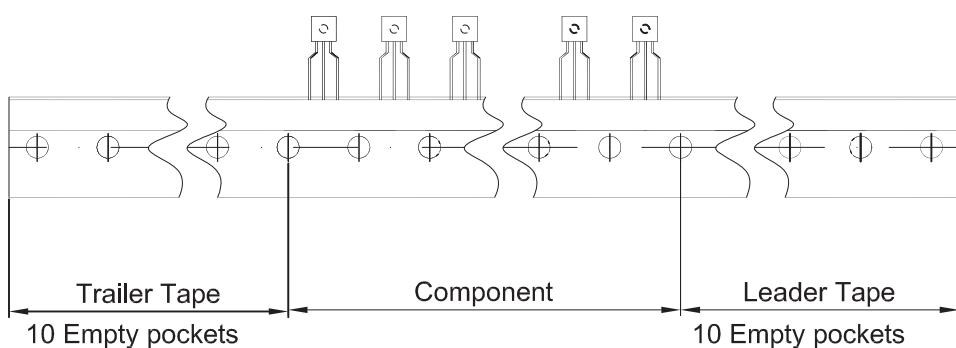

Package	Box	Box Size(mm)	Carton	Carton Size(mm)
TO-92	2000 pcs	333×162×43	20,000 pcs	350×340×250

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for Bipolar Transistors - BJT category:***

***Click to view products by Changjing Electronics Technology manufacturer:***

Other Similar products are found below :

[619691C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [BC557/116](#) [BSW67A](#) [NJVMJD148T4G](#) [NTE123AP-10](#) [NTE153MCP](#) [NTE16](#)  
[NTE195A](#) [NTE92](#) [C4460](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SA2126-E](#) [2SB1204S-TL-E](#) [2SC2712S-GR,LF](#) [2SC5488A-TL-H](#)  
[2SD2150T100R](#) [SP000011176](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC2412KT146S](#) [2SD1816S-TL-E](#) [CPH6501-TL-E](#) [MCH4021-TL-E](#)  
[MJE340](#) [US6T6TR](#) [NJK0281DG](#) [732314D](#) [CPH3121-TL-E](#) [CPH6021-TL-H](#) [873787E](#) [IMZ2AT108](#) [UMX21NTR](#) [MCH6102-TL-E](#)  
[NJK0302DG](#) [2N3583](#) [30A02MH-TL-E](#) [TN6717A](#) [NSV40301MZ4T1G](#) [NTE13](#) [NTE26](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#)