



G-4 1/2 Miniature Bayonet Base

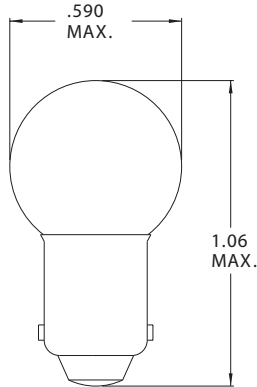


| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM427 | 5.0 | .50 | 2.3 | 15 | C-2R |
| CM503 | 5.1 | .15 | .60 | 100 | C-2R |
| CM607 | 6.0 | .50 | 3.6 | 3 | C-2R |
| CM1406 | 6.0 | .04 | .10 | 250 | C-6 |
| CM604 | 6.15 | .50 | 3.2 | 15 | C-2R |
| CM55 | 7.0 | .41 | 2.0 | 500 | C-2R |
| CM1896 | 7.0 | .50 | 2.2 | 1,500 | C-2R |
| CM57 | 14.0 | .24 | 2.0 | 500 | C-2V |
| CM57X | 14.0 | .24 | 2.0 | 500 | C-2F |
| CM293 | 14.0 | .33 | 2.0 | 5,000 | C-2F |
| CM431 | 14.0 | .25 | 2.7 | 250 | C-2V |
| CM1895 | 14.0 | .27 | 2.0 | 1,500 | C-2F |
| CM433 | 18.0 | .25 | 3.5 | 250 | C-2V |
| CM456 | 28.0 | .17 | 2.0 | 5,000 | C-2F |

G-4 1/2 Miniature Screw Base

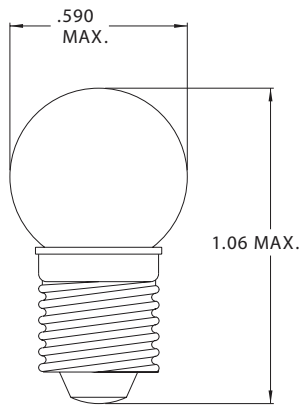

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM136 | 1.25 | .60 | .20 | 75 | S-2 |
| CM116 | 2.65 | .41 | .80 | 15 | C-2R |
| CM27 | 4.90 | .30 | 1.4 | 30 | C-2R |
| CM425 | 5.00 | .50 | 2.3 | 15 | C-2 |
| CM502 | 5.10 | .15 | .60 | 100 | C-2R |
| CM1482 | 6.00 | .45 | 2.2 | 100 | C-2R |
| CM1483 | 6.00 | .04 | .10 | 500 | C-6 |
| CM31 | 6.15 | .30 | 2.0 | 15 | C-2R |
| CM605 | 6.15 | .50 | 3.4 | 15 | C-2R |
| CM428 | 12.50 | .25 | 2.4 | 250 | C-2V |
| CM430 | 14.0 | .25 | 2.7 | 250 | C-2R |
| CM432 | 18.0 | .25 | 3.5 | 250 | C-2V |

G-4 1/2 Miniature 2 Pin Base

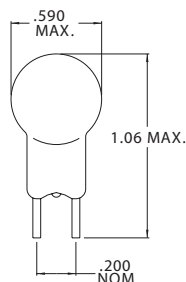

| Part Number | Design Voltage | Amps | MSCP | Life Hours | Filament Type |
|-------------|----------------|------|------|------------|---------------|
| CM15 | 7.0 | .40 | 2.0 | 500 | C-6 |
| CM20 | 14.0 | .23 | 2.0 | 500 | C-2R |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Lamps category](#):

Click to view products by [Chicago Miniature manufacturer](#):

Other Similar products are found below :

[5911-086-13](#) [5AB](#) [6180](#) [7009](#) [8623](#) [909](#) [912](#) [1224](#) [1230](#) [DE603](#) [BF20100-11B](#) [1892](#) [NL177WL2A](#) [NL276C2A](#) [IFL-LX2162-16T](#) [C2A-T](#)
[C9A](#) [301](#) [303](#) [SM2440L](#) [A1C](#) [A2B](#) [19](#) [268](#) [GT-NE6H1225T](#) [CM1820](#) [CM5004WW](#) [303](#) [32-2211T](#) [36EN-2113](#) [407](#) [4916S1](#) [521-7332](#)
[5314N1](#) [5314N2](#) [311](#) [WWT1-EW10/GRN](#) [4925H1](#) [DW07](#) [MS25231-313](#) [5603437](#) [5603851](#) [CM2](#) [7683EBP](#) [8553](#) [XE135B](#) [WWT2-](#)
[EW34BLA](#) [5705H7](#) [NL2951WL2G](#) [1301910036](#)