



## JZC4 系列接触器式继电器

### 1 适用范围

JZC4 系列接触器式继电器主要用于交流 50Hz 或 60Hz、额定工作电压至 400V 及直流额定电压至 220V 的继电器控制、信号传递、隔离放大等电路中，作接通、分断、放大之用。

符合标准：GB/T 14048.5、IEC 60947-5-1。

### 2 型号及含义



型号	触头对数	
	常开	常闭
JZC4-40	4	0
JZC4-31	3	1
JZC4-22	2	2
JZC4-13	1	3
JZC4-04	0	4
F4-11	1	1
F4-20	2	0
F4-02	0	2
F4-13	1	3
F4-31	2	1
F4-22	3	2
F4-40	4	0
F4-04	0	4

### 3 正常工作条件和安装条件

- 3.1 周围空气温度为：-5°C~+40°C，24 小时内其平均值不超过+35°C。
- 3.2 海拔高度：不超过2000m。
- 3.3 大气条件：在最高温度+40°C时，空气相对湿度不超过50%；在较低温度下可以允许有较高的相对湿度，例如+20°C时达90%。对由于温度变化偶尔产生的凝露应采取特殊的措施。
- 3.4 污染等级：3 级。
- 3.5 安装类别：Ⅲ类。
- 3.6 安装条件：安装面与垂直面倾斜度不大于±5°。
- 3.7 冲击振动：产品应安装和使用在无显著摇动、冲击和振动的地方。

### 4 主要参数及技术性能

- 4.1 主要技术参数(见表2)。
- 4.2 动作特性：吸合电压：85%Us~110%Us；释放电压：20%Us~75%Us。

表2


额定绝缘电压(V)	约定自由空气发热电流(A)	最小负载(可靠工作)	额定工作电压及电流		电寿命(次数×10 <sup>4</sup> )	机械寿命(次数×10 <sup>4</sup> )	线圈电压 V(AC)
			DC-13	AC-15			
690	10	6V×10mA	220/250V 0.15A	380/400V 0.95A	100	1000	24、(36)、48、110 (127)、220、380

## 5 结构特点

触点采用摩擦接触方式。组合式结构、可方便地安装各种附件：辅助触头组、延时头、锁扣装置等增加不同功能。继电器端子均有防护结构、达到IP10级，使用时安全可靠。接线螺钉采用自升式瓦形垫圈的组合螺钉。继电器可用螺钉安装，也可安装在35mm宽的标准卡轨上。更换线圈时，只需将连接继电器上下两绝缘座的螺钉拧松，分开机壳上下两部分即可。

本产品由CJX2-09派生，其外形及安装尺寸与CJX2-09相同，还可以方便地挂装F4辅助触头组，增加触头数量，最多可达4对，其组合情况（见表1）。

## 6 外形及安装尺寸

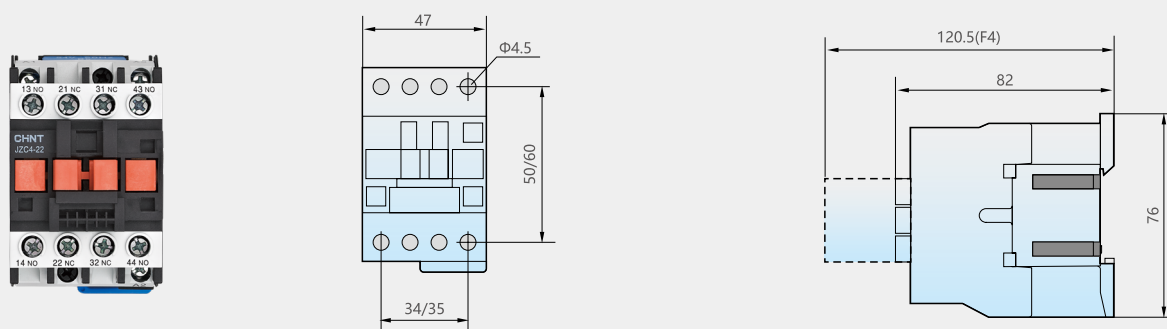

## 7 订货须知

7.1 订购时必须指出：

- 7.1.1 继电器完整的型号、名称；
- 7.1.2 线圈的额定控制电源电压及频率；
- 7.1.3 如需订购辅助触头组F4，须写明组合情况；
- 7.1.4 订货数量。

7.2 订货示例：JZC4-22 接触器式继电器 线圈电压220V 50Hz 10台 F4-22 5只。

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Contactor Accessories](#) category:*

*Click to view products by [CHINT](#) manufacturer:*

Other Similar products are found below :

[3RT1945-5AP61](#) [YC9Z-RHU10A16P](#) [YC9Z-RHU5A1P6](#) [YC9Z-CI6](#) [YC9Z-CNA211M](#) [LR3D08](#) [1SBN050100R1002](#) [1SBN050020R1003](#)  
[022.63](#) [F4-22](#) [EH04-11N](#) [CA4-31E](#) [CAL5X-11](#) [F5-T0](#) [CA5X-22M](#) [YC9Z-LCU38A24](#) [YC9Z-RHU5A2P5](#) [49AB20](#) [75D73251A](#)  
[GHV2501910R0001](#) [022.18.0](#) [LA4DA2U](#) [LA4KA1U](#) [022.33](#) [DILA-XHI40-PI](#) [11BA135](#) [P1X1011](#) [A9C15915](#) [DILA-XHI20-PI](#)  
[1SBN082306T2000](#) [DILA-XHI11-PI](#) [SPM-05-11](#) [A9C15914](#) [1SAX531001R1101](#) [022.35](#) [022.18](#) [DILM32-XHI11-PI](#) [DILM32-XHI22-PI](#)  
[GHV2501903R0002](#) [DILA-XHI13-PI](#) [1SBN020114R1000](#) [1SBN081306T1000](#) [LAD9V5](#) [1SAX721001R1101](#) [1SBN020312R1000](#)  
[1SAX121001R1105](#) [1SAX221001R1101](#) [BFX1211](#) [LXD1B7](#) [GHV2501902R0002](#)