

3 Series Thumbwheel Switches



Features/Benefits

- Most complete product offering in the industry
- Spacers available to fit most panel cutouts
- Front or rear mounting options

Typical Applications

- Test & measurement equipment
- Industrial equipment
- Computer devices

Specifications

CONTACT RATING:
 CARRY: 1 AMP continuous.
 SWITCH: 100 mA max.

OPERATING VOLTAGE: 50 mV to 28 V DC or 120 V AC.
 ELECTRICAL LIFE: 100,000 actuations.

CONTACT RESISTANCE: Below 100 m Ω typ. initial @
 2-4 V DC, 100 mA.

INSULATION RESISTANCE: 10⁹ Ω min.

DIELECTRIC STRENGTH: 500 Vrms min. @ sea level
 between common terminal and any output.

OPERATING TEMPERATURE: -40°C to 65°C.

Materials


HOUSING: ABS plastic.
 THUMBWHEEL: ABS plastic.
 ROTOR CONTACTS: Precious metal on copper alloy.
 STATOR CONTACTS: Hard gold over nickel over copper
 on epoxy fiberglass.

NOTE: Specifications and materials listed above are for switches with standard options
 For information on specific and custom switches, consult Customer Service Center.

* Note: All models listed are RoHS compliant. See Technical Data section of this catalog for
 RoHS compliant and compatible definitions and specifications.

Build-A-Switch


To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages M-4 thru M-10. For additional options not shown in catalog, consult Customer Service Center. Consult factory for illumination availability.

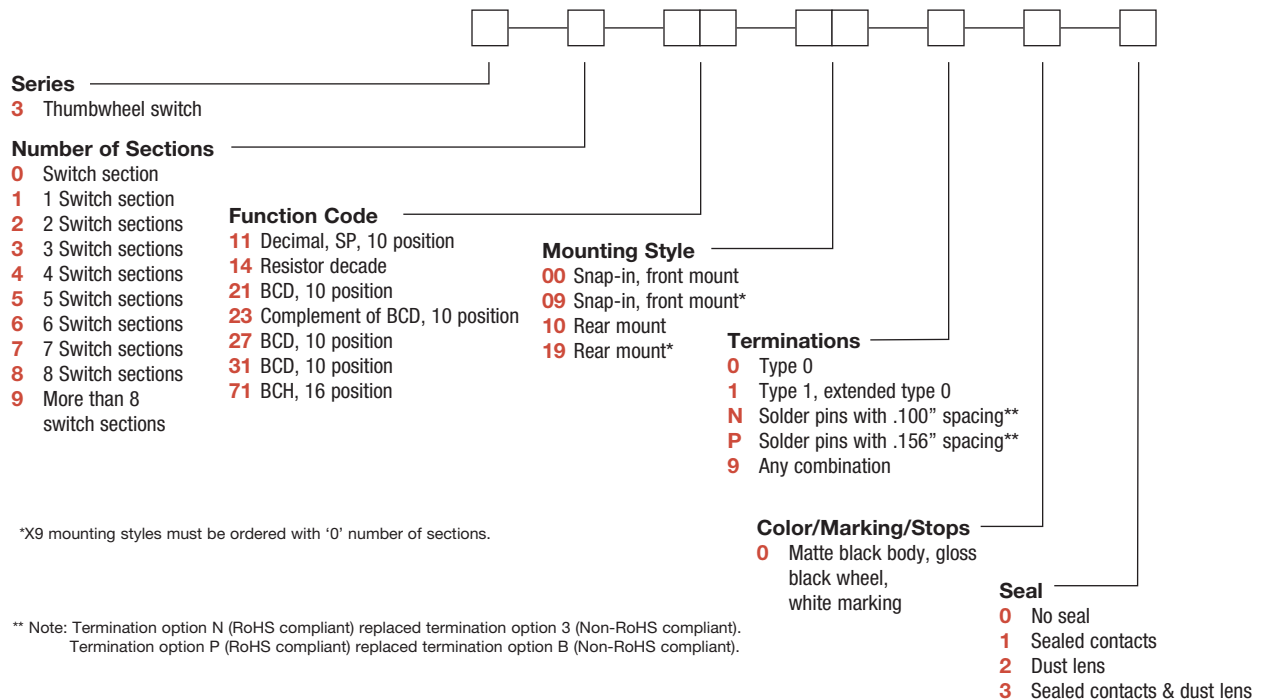

3 Series Thumbwheel Switches

SERIES

3 THUMBWHEEL SWITCHES

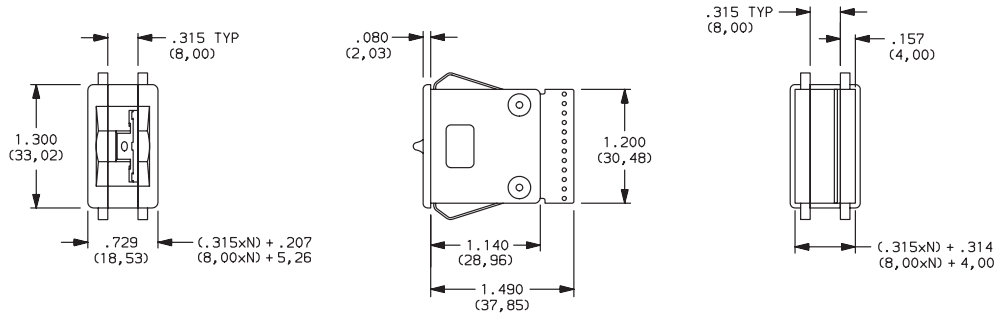

NUMBER OF SECTIONS

- 0** Switch section only, no assembly. Blank bodies are considered sections; endplates are not sections. Must be ordered with 09 or 19 mounting style options, see pages M-5 and M-6.
- 1-8** Number of switch sections in assembly, includes endplates.
- 9** More than 8 switch sections, specify on CONFIGURATION FORM, page M-10 and consult Customer Service Center.

NOTE: Endplates and blank sections available separately, see pages M-13 and M-14.

FUNCTION CODE


- 11** DECIMAL-1 POLE; 10 POSITION
- 14** RESISTOR DECADE; 1-2-2-2-2 CODE (RESISTORS NOT SUPPLIED)
- 21** BCD 1-2-4-8; 10 POSITION

| W H E E L | SIGNALS CONNECTED TO COMMON | | | | | | | | | | SIGNAL C |
|-----------------------|-----------------------------|---|---|---|---|---|---|---|----|----|----------|
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | |
| 0 | ● | | | | | | | | | | ● |
| 1 | | ● | | | | | | | | | ● |
| 2 | | | ● | | | | | | | | ● |
| 3 | | | | ● | | | | | | | ● |
| 4 | | | | | ● | | | | | | ● |
| 5 | | | | | | ● | | | | | ● |
| 6 | | | | | | | ● | | | | ● |
| 7 | | | | | | | | ● | | | ● |
| 8 | | | | | | | | | ● | | ● |
| 9 | | | | | | | | | | ● | ● |
| | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 |
| | TERM. LOCATION | | | | | | | | | | |

Available Terminations: 0, 1, N
See fig. 1, page M-7.

| W H E E L | SWITCH CIRCUIT | | | | | | | | | |
|-----------------------|----------------|---|---|---|---|-----|----|---|---|---|
| | 0 | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| 0 | ● | | | | | | | | | ● |
| 1 | ● | ● | | | | | | | | ● |
| 2 | ● | ● | ● | | | | | | | ● |
| 3 | ● | ● | ● | ● | | | | | | ● |
| 4 | ● | ● | ● | ● | ● | | | | | ● |
| 5 | ● | ● | ● | ● | ● | ● | | | | ● |
| 6 | ● | ● | ● | ● | ● | ● | ● | | | ● |
| 7 | ● | ● | ● | ● | ● | ● | ● | ● | | ● |
| 8 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| 9 | ● | ● | ● | ● | ● | ● | ● | ● | ● | ● |
| | 11 | 9 | 7 | 5 | 3 | 1,2 | 12 | | | |
| | TERM. LOCATION | | | | | | | | | |


Available Terminations: 1
See fig. 1, page M-7.



| W H E E L | SIGNALS CONN. TO COMM. SIG. C | | | | | | | |
|-----------------------|-------------------------------|---|---|----|---|--|--|--|
| | 1 | 2 | 4 | 8 | C | | | |
| 0 | | | | | ● | | | |
| 1 | ● | | | | ● | | | |
| 2 | | ● | | | ● | | | |
| 3 | ● | ● | | | ● | | | |
| 4 | | | ● | | ● | | | |
| 5 | ● | ● | ● | | ● | | | |
| 6 | | ● | ● | | ● | | | |
| 7 | ● | ● | ● | ● | ● | | | |
| 8 | | | | ● | ● | | | |
| 9 | ● | ● | ● | ● | ● | | | |
| | 3 | 5 | 7 | 11 | 9 | | | |
| | TERM. LOCATION | | | | | | | |

Available Terminations: 0, 1, N
See fig. 1, page M-7.

NOTE: For terminal location diagram, see page M-7.



Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

3 Series Thumbwheel Switches

FUNCTION CODE

23 COMPLEMENT OF BCD 1-2-4-8;
10 POSITION

| W H E E L | SIGNALS CONN. TO COMM. SIG. C | | | |
|-----------------------|----------------------------------|---|----|---|
| | 1 | 2 | 4 | 8 |
| 0 | ● | ● | ● | ● |
| 1 | ● | ● | ● | ● |
| 2 | ● | ● | ● | ● |
| 3 | ● | ● | ● | ● |
| 4 | ● | ● | ● | ● |
| 5 | ● | ● | ● | ● |
| 6 | ● | ● | ● | ● |
| 7 | ● | ● | ● | ● |
| 8 | ● | ● | ● | ● |
| 9 | ● | ● | ● | ● |
| TERM. LOCATION | | | | |
| | 3 | 9 | 11 | 5 |
| | | | | 7 |

Available Terminations: 0, 1, N
See fig. 1, page M-7.

27 BCD 1-2-4-8; 10 POSITION

| W H E E L | SIGNALS CONN. TO COMM. SIG. C | | | |
|-----------------------|----------------------------------|---|---|---|
| | 1 | 2 | 4 | 8 |
| 0 | | | | ● |
| 1 | ● | | | ● |
| 2 | | ● | | ● |
| 3 | ● | ● | | ● |
| 4 | | | ● | ● |
| 5 | ● | | ● | ● |
| 6 | | ● | ● | ● |
| 7 | ● | ● | ● | ● |
| 8 | | | ● | ● |
| 9 | ● | | ● | ● |
| TERM. LOCATION | | | | |
| | 4 | 5 | 1 | 2 |
| | | | | 3 |

Available Terminations: P
See fig. 2, page M-7.

31 BCD 1-2-4-8; 10 POSITION

| W H E E L | SIGNALS CONN. TO COMM. SIG. C | | | |
|-----------------------|----------------------------------|---|----|---|
| | 1 | 2 | 4 | 8 |
| 0 | | | | ● |
| 1 | ● | | | ● |
| 2 | | ● | | ● |
| 3 | ● | ● | | ● |
| 4 | | | ● | ● |
| 5 | ● | | ● | ● |
| 6 | | ● | ● | ● |
| 7 | ● | ● | ● | ● |
| 8 | | | ● | ● |
| 9 | ● | | ● | ● |
| TERM. LOCATION | | | | |
| | 2 | 3 | 11 | 9 |
| | | | | 8 |

Available Terminations: 0, 1, N
See fig. 1, page M-7.

71 BINARY CODED HEXADECIMAL,
16 POSITION

| W H E E L | SIGNALS CONN. TO COMM. SIG. C | | | |
|-----------------------|----------------------------------|---|---|----|
| | 1 | 2 | 4 | 8 |
| 0 | | | | ● |
| 1 | ● | | | ● |
| 2 | | ● | | ● |
| 3 | ● | ● | | ● |
| 4 | | | ● | ● |
| 5 | ● | | ● | ● |
| 6 | | ● | ● | ● |
| 7 | ● | ● | ● | ● |
| 8 | | | ● | ● |
| 9 | ● | | ● | ● |
| A | | ● | | ● |
| B | ● | ● | | ● |
| C | | | ● | ● |
| D | ● | | ● | ● |
| E | | ● | ● | ● |
| F | ● | ● | ● | ● |
| TERM. LOCATION | | | | |
| | 3 | 5 | 7 | 11 |
| | | | | 9 |

Available Terminations: 0, 1, N
See fig. 1, page M-7.

NOTE: For terminal location diagram, see page M-7.

MOUNTING STYLE


Type 0 Snap-In Front Mount

| MOUNTING STYLE | DIM. 'A' |
|----------------|--|
| 00 | $(.315 \times N) + .326$ $(8,00 \times N) + (8,28)$ |




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING




00 SWITCH ASSEMBLY W/ ENDPLATES--.315 (8,00) SECTION PITCH



N = Number of sections.

09 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS
(Must be ordered with number of sections option "0", see Page M-4.)

NOTE: Endplates, blank sections, spacers
and assembly hardware available separately, see pages M-8 and M-9.



Third Angle
Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change



3 Series Thumbwheel Switches

MOUNTING STYLE


Type 1 Rear Mount

| MOUNTING STYLE | DIM. 'A' | DIM. 'B' |
|----------------|--|---|
| 10 | $(.350 \times N) + .340$ $(8,89 \times N) + (8,64)$ | $(.350 \times N) + .560$ $(8,89 \times N) + (14,22)$ |




N = Number of sections.

Recommended panel thickness:
0.46-.125
(1,16-3,18)

PANEL MOUNTING

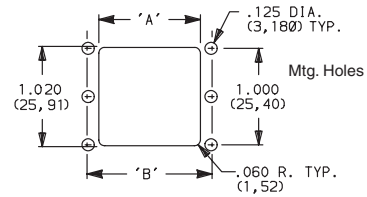

10 SWITCH ASSEMBLY W/ ENDPLATES--.350 (8,89) SECTION PITCH

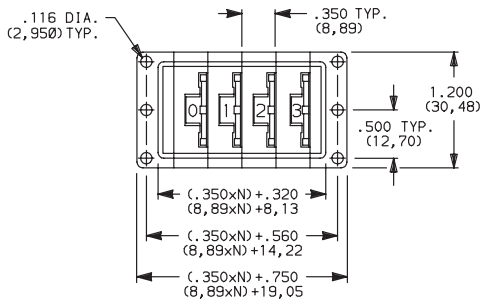


N = Number of sections.

19 SWITCH SECTION ONLY--UNASSEMBLED WITHOUT ENDPLATES OR SPACERS (Must be ordered with number of sections option "0", see Page M-4.)

NOTE: Endplates, blank sections, spacers and assembly hardware available separately, see pages M-8 and M-9.

Thumbwheel

M




Third Angle
Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change


TERMINATIONS




0 TYPE 0

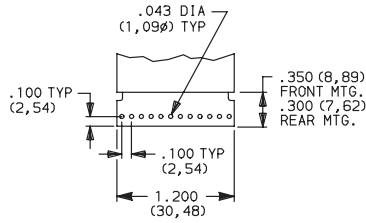


1 TYPE 1, EXTENDED TYPE 0

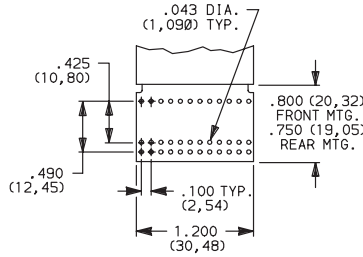

N SOLDER PINS WITH .100" SPACING

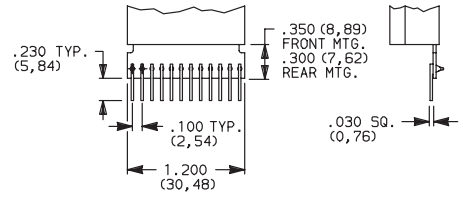

P SOLDER PINS WITH .156" SPACING

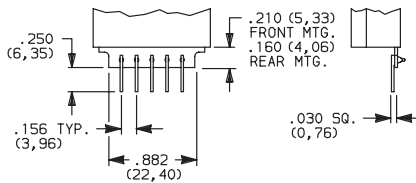

PC Board 1/32" (0,79) thick.

9 ANY COMBINATION OF TERMINATION CONFIGURATIONS OR SPECIAL TERMINATIONS.

Specify on configuration form, page M-10 and consult Customer Service Center.

Signal traces cut except for common(s).

NOTE: All terminal holes shown may not be present for all function codes, consult Customer Service Center. Terminal connector available for termination options 0 & 1, see page M-9.

NOTE: Termination option N (RoHS compliant) replaced termination option 3 (Non-RoHS compliant). Termination option P (RoHS compliant) replaced termination option B (Non-RoHS compliant).

Terminal Location Numbers




FIG. 1




FIG. 2



NOTE: See function codes, pages M-4 and M-5, for signal locations.

COLOR/MARKING/STOPS



0 MATTE BLACK HOUSING (Gloss black wheel with white characters; no stops.)

NOTE: Stop pins are available separately, see page M-8.

SEAL




0 UNSEALED SWITCHING CONTACTS.


1 SEALED SWITCHING CONTACTS. (Sealing is by means of an o-ring rotary seal and a cured-in-place elastomer gasket. Switching contact area is protected from moisture, oil, and airborne contaminants.)

2 DUST LENS. (Protects the character face of the wheel from abrasion and dirt.)

3 SEALED SWITCHING CONTACTS AND DUST LENS



Dust Lens



Third Angle
Projection

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

3 Series Thumbwheel Switches

AVAILABLE HARDWARE

Blank sections, Type 0,
.315 THK.




PART NO.
413602000 W/RIB-BLACK
400502000 W/RIB & W/OUT SPRINGS-BLACK

Blank sections, Front mount, Type 0,
.315 THK.



PART NO.
413502000 PLAIN-BLACK
400702000 PLAIN & W/OUT SPRINGS-BLACK


Blank sections, Rear mount, Type 1,
.350 THK.

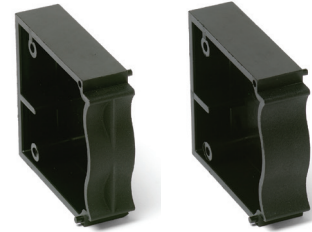

4006 4008

PART NO.
400602000 W/RIB-BLACK
400802000 PLAIN-BLACK

Blank sections, Rear mount, Type 2,
.350 THK.

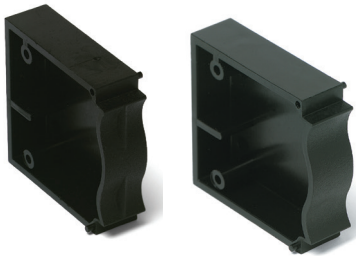

4734 4733

PART NO.
473402000 W/RIB-BLACK
473302000 PLAIN-BLACK

End plates, Front mount, Type 0



PART NO.
413402000 BLACK

Two required for complete assembly.

End plates, Rear mount, Type 1



PART NO.
400402003 BLACK

Two required for complete assembly.

End plates, Rear mount, Type 2



PART NO.
473202003 BLACK

Two required for complete assembly.

Spacers, Front mount, Type 0 & 3, .078 THK.
(Makes section pitch 10mm)



PART NO.
410802000 BLACK

Stop pins



PART NO.
402900000

Thumbwheel

M

3 Series Thumbwheel Switches

AVAILABLE HARDWARE

Terminal connector



605A00000



605A02000

PART NO.
605A00000 PC
605A02000 SOLDER LUG

Fits 0 & 1 terminations only.

Screws for field assembly of thumbwheel switches
 (2 screws needed per assembly + 403500000 nuts)

| SCREW PART NUMBER (0-80 UNF THD. SIZE) | NUMBER OF SECTIONS IN ASSEMBLY | |
|---|--------------------------------|-----------------|
| | FRONT MOUNTING | REAR MOUNTING |
| | MTG. STYLE - 00 | MTG. STYLE - 10 |
| 412700000 | 1-2 | 1-2 |
| 412701000 | 3-4 | 3 |
| 412702000 | 5-7 | 4-6 |

Nut



Two nuts required per assembly and screws.

PART NO.
403500000

Nut driver (For 403500000 nut)



PART NO.
406100652

Thumbwheel



M

3 Series Thumbwheel Switches

Configuration Form

GRAY SHADED AREAS TO BE FILLED IN BY CUSTOMER SERVICE.

CATALOG PART NO.

3

C&K PART NUMBER

C&K PART NUMBER

COMPANY NAME _____












CUSTOMER
PRINT
REVISION:

ADDRESS _____ TEL.# _____

CUSTOMER CONTACT _____ DATE _____

DETAILS:

ORIGINATED BY _____ SALES REP. _____

| THUMBWHEEL SECTIONS | NO. OF SEC. | FUNCTION CODE – TERMINATIONS – COLOR/MARKING/STOPS/SEAL – ILLUMINATION <small>ENTER OPTION CODES IN APPROPRIATE BOXES. FUNCTION CODES INCLUDE BLANK SECTIONS (SEE PAGES M-9 & M-10).</small> | DESCRIBE IN APPROPRIATE ROW |
|---|-------------|---|-----------------------------|
|  | 1 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 2 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 3 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 4 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 5 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 6 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 7 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 8 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 9 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 10 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |
|  | 11 | 3 - <input type="text"/> <input type="text"/> - - <input type="text"/> <input type="text"/> <input type="text"/> <input type="text"/> | |

QUALITY CONTROL INSTRUCTIONS

PRODUCTION APPROVAL

DATE

Q.C. APPROVAL

DATE

REV.

INITIALS

DATE

FOR SWITCHES WITH MORE THAN 11 SECTIONS, CONTINUE ON ADDITIONAL SHEETS.

SPECIAL INSTRUCTIONS OR SPECIFICATIONS:

SHEET ____ OF ____



6 Mar 20

Dimensions are shown: Inches (mm)
Specifications and dimensions subject to change

Thumbwheel



M

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Thumbwheel Switches & Pushwheel Switches](#) category:

Click to view products by [C&K](#) manufacturer:

Other Similar products are found below :

[PICOD131ALULS2](#) [A7SS-107-PM](#) [DGAN-031-B](#) [1437603-2](#) [DPS10131AL2](#) [DPS10301AK](#) [DPS8111AK](#) [DPS8137AK2](#) [DPS8L2](#) [DPS8P2](#)
[1437603-7](#) [312200000](#) [B5LS](#) [B9LS](#) [5034CR](#) [3-1437603-8](#) [C2K0-P107](#) [DGBN-036-B](#) [DPS10131AK](#) [DPS9131AK](#) [1-1437602-9](#) [1-](#)
[1437602-8](#) [SH6G137AKLS2](#) [SMCD111AK](#) [432703046181](#) [1-1437603-1](#) [SMCD137AK](#) [SM000153](#) [SP1.5](#) [DPS8111AK2](#) [SMCDE131AK2](#)
[TW01RED14](#) [TW01BLU14](#) [84211008](#) [84212014](#) [84212013](#) [HTWF-1A12A21](#) [84212005](#) [333100110](#) [301109100](#) [301419100](#) [302109002](#)
[302329N00](#) [311100001](#) [312100100](#) [312300000](#) [317110000](#) [332300003](#) [337100000](#) [342300001](#)