


Heat Shrink Tubings

RKT Series

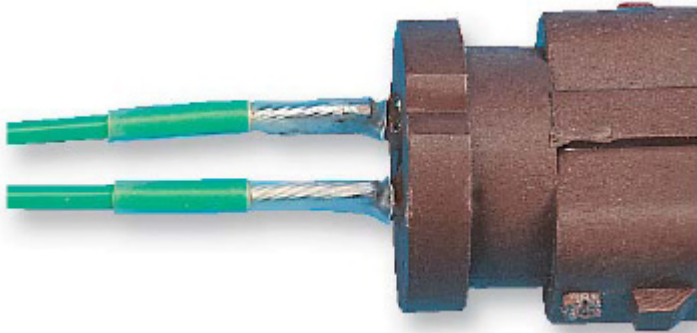

Features:

- High temperature and fluid resistant, extra tough, semi-rigid heat-shrinkable tubing
- Excellent chemical resistance, excellent abrasion resistance, 2:1 shrink ratio



It is an extremely tough, high temperature, thin wall insulation tubing. This transparent non-burning, semi-rigid tubing has superior resistance to most industrial fuels, solvents and chemicals. Designed for applications requiring strain relief at temperatures up to 175°C, this product is unusually tough in its resistance to abrasion and cut-through. Typical applications include high temperature applications, protection, strain relief, chemical resistance, mechanical and abrasion protection.

Specifications:

Operating Temperature Range : -55°C to +175°C
Minimum Shrink Temperature : +155°C
Minimum Full Recovery Temperature : +175°C

Performance

Test	Test Method	Test Requirement
Heat Ageing	IEC 60684 - 2 Clause 39 (168 Hours at 200°C)	Minimum Tensile Strength : 15 MPa Minimum Elongation : 75%
Corrosion Resistance	IEC 60684 - 2 Clause 33 (16 Hours at 175°C)	No Corrosion of Mirrors
Breakdown Voltage	IEC 60684 - 2 Clause 21	-
Maximum Flame Propagation	IEC 60684 - 2 Clause 26 Method C	15 s UL224 VW1
Fluid Resistance	IEC 60684 - 2 Clause 36	Minimum Tensile Strength : 25 MPa Minimum Ultimate Elongation : 150%
	Test Fluids	Aircraft Fuel to ISO1817 Liquid F (70°C) Phosphate Ester ISO1817 Liquid 103 (23°C) Lubricating Oil ISO1817 Liquid 101 (70°C)

Heat Shrink Tubings


RKT Series

Specification Table

Size (Inches)	Inside Diameter		Wall Thickness	Length (m)	Part Number
	Minimum Expanded as Supplied (D)	Maximum Recovered After Heating (d)	Nominal Recovered After Heating (W)		
3/64	1.2	0.6	0.25	1.2	RKT-3/64-X-4FT
1/16	1.6	0.8			RKT-1/16-X-4FT
3/32	2.4	1.2	0.27		RKT-3/32-X-4FT
1/8	3.2	1.6			RKT-1/8-X-4FT
3/16	4.8	2.4			RKT-3/16-X-4FT
1/4	6.4	3.2	0.33		RKT-1/4-X-4FT
3/8	9.5	4.8			RKT-3/8-X-4FT
1/2	12.7	6.4			RKT-1/2-X-4FT
3/4	19	9.5	0.43		RKT-3/4-X-4FT
1	25.4	12.7	0.48		RKT-1-X-4FT

Dimensions : Millimetres (Unless Specified)

Part Number Explanation:

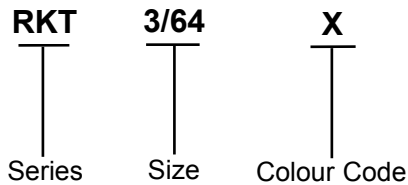

Colour Code : X = Clear

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

X-ON Electronics

Authorized Distributor

Click to view similar products for [Wire Identification](#) category.

Click to view products by [Pro Power](#) manufacturer.

Other Similar products are found below :

[PCM39](#) [M200X042FPT](#) [M200X042UPT](#) [M200X050ACT](#) [M200X050AGT](#)
[M200X080FQT](#) [M200X080UPT](#) [M200X100ACT](#) [M200X100AFT](#) [M200X100AIT](#)
[M300X050ACT](#) [M300X050AET](#) [M300X050AFT](#) [M300X100ACT](#) [M300X100AET](#)
[T100X000VY1Y](#) [T100X000VX1Y](#) [T100X000VS1Y](#) [T100X000VP1Y](#) [T100X000RU1](#)
[T100X000RP1](#) [T075X000C1CBK](#) [171284000](#) [SDRBK](#) [S100X150VIC](#)