
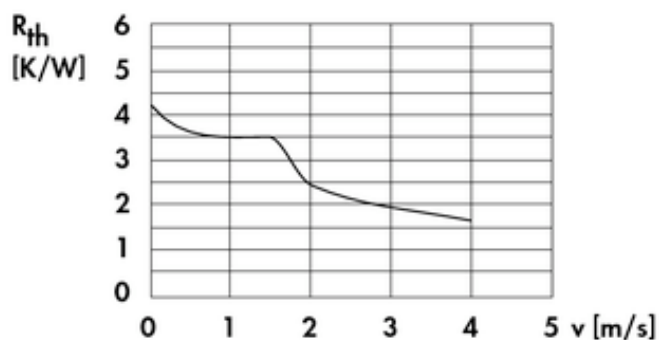




Pin heatsinks / **ICK S R 28,5 x 18,5**



Ø 28,5 x 18,5 mm, pin heatsinks round

**Parameters of article ICK S R 28,5 x 18,5**

<b>Bauform</b>	Rund
<b>R<sub>th</sub> [K/W]</b>	4.25
<b>dissipation loss [W]</b>	20.2
<b>mounting method</b>	therm. conductive foil / therm. cond. adhesive
<b>socket</b>	universal
<b>suitable for processor type</b>	universal
<b>Ø [mm]</b>	28.5
<b>height [mm]</b>	18.5
<b>plate thickness [mm]</b>	3
<b>weight [g]</b>	6.98

**Accessories/ related articles**

Thermally conductive foil both sides adhesive / **WLFT 404 D 28,5**

Thermally conductive foil both sides adhesive / **WLFT 405 D 28,5**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [fisher manufacturer](#):*

Other Similar products are found below :

[FR 105 52 220 ME](#) [FR 120 42 200 ME](#) [GEL 28 30](#) [GEL 45 10](#) [GEL 45 50](#) [GEL 60 10](#) [AKG 33 20 80 ME](#) [BL 2 72 Z](#) [ICKSR40X30](#) [LA 17 150 230](#) [LA 21 150 230](#) [LA 21 150 24](#) [LA 27 K 100 12](#) [LA 27 K 100 24](#) [LA 27 K 150 12](#) [LA 27 K 50 24](#) [SK4615AL](#) [SK 47 250 SA](#) [SK56920AL](#) [SK57225SA](#) [SK57720AL](#) [SK58420AL](#) [SK58437.5SA](#) [SK 622 1000 AL](#) [SK 622 1000 SA](#) [SK 622 100 AL](#) [SK 623 100 SA](#) [SK 626 1000 SA](#) [SK 626 50 SA](#) [SK 627 1000 AL](#) [SK 627 200 AL](#) [SK 627 200 SA](#) [SK 627 50 SA](#) [SK 632 100 AL](#) [SK 633 25 AL](#) [SK 636 100 AL](#) [SK LED R 65 SA](#) [SK LED R 80 SA](#) [AKG 69 24 100 SA](#) [FR 80 42 160 ME](#) [GE K 80 42 100 SA](#) [GEL 45 30](#) [GEL 60 25](#) [GEL F 15 10](#) [TUF 120 42 220 ME](#) [TUF 55 16 200 SA](#) [BL 3 36 Z](#) [LA 27 K 50 12](#) [LA 27 K 75 24](#) [WAG 200 SA](#)