



功得電子工業股份有限公司  
CONQUER ELECTRONICS CO.,LTD.

# 規格書

Spec. No. SFA003

## Specification For Approval

型號：**ABE/ABP-A 系列**  
快速型瓷管保險絲

Model：**ABE/ABP-A Series**  
*Fast Acting Ceramic Tube Fuse Series*

[www.conquer.com.tw](http://www.conquer.com.tw)

五股廠：新北市五股區五權五路26號(新北產業園區)  
Wugu Factory:No.26, Wucyuan 5th Rd., Wugu Dist.,  
(New Taipei Industrial Park) New Taipei City  
24888,Taiwan  
TEL:+886-2-89902189(Rep.)  
FAX:+886-2-8990-2577

北投廠：台北市北投區立德路120巷15號  
Peitou Factory:No. 15,Lite Road,Peitou,  
Taipei11259, Taiwan.  
TEL:+886-2-2895-8895(代表號)  
FAX:+886-2-2895-8880



### History of Change

REV.	Description	Date	Drawn	Designed	Checked	Approved
1	(1)發出 Issue。	2010.06.24	廖英璋	葉志浩	蔡進義	蔡其湖
2	(1)新增詳述8 遮斷能力 Interrupting rating。	2010.10.04	廖英璋	葉志浩	蔡進義	蔡其湖
3	(1)新增詳述8 遮斷能力 Interrupting rating: 40A。 (2)新增11 標記/安規認證 Mark/Safety certification: 40A。	2012.11.24	廖英璋	葉志浩	蔡進義	蔡其湖
4	(1)修改11 標記/安規認證 Mark/Safety certification: 40A的冷阻值。	2013.07.10	廖英璋	邱俊傑	蔡進義	蔡其湖
5	(1)刪除2.2 額定電壓 Rated Voltage: 125V / 32V。 (1)新增8 遮斷能力 Interrupting Rating: 0.1A~10A: 750 amperes at 250V DC。 20.1A~30A: 1000 amperes at 125V AC (2)新增11 標記/安規認證: I <sup>2</sup> t值。 (3)新增13 安裝方式及條件 Installation Way and Parameters。 (4)新增14 建議生產參數(無鉛焊錫使用)。	2016.11.22	廖英璋	邱俊傑	蔡進義	蔡其湖
6	(1)將規格書內的AC修改為ac, DC修改為dc。 (2)修改9 包裝: ABE一箱數量為5000PCS。 (3)新增15 It曲線圖和16 I <sup>2</sup> t曲線圖。	2018.02.05	廖英璋	邱俊傑	蔡進義	蕭順益

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577


Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Official Website: http://www.conquer.com.tw

1 適用範圍 Available Range:

本標準適用於保護儀器、電源供應器和電話機用之筒管式熔斷保險絲。  
For protecting instruments, power supplies and telephone sets.

2 形狀及尺寸如下圖 Shape & Size as following illustrations. 單位: mm

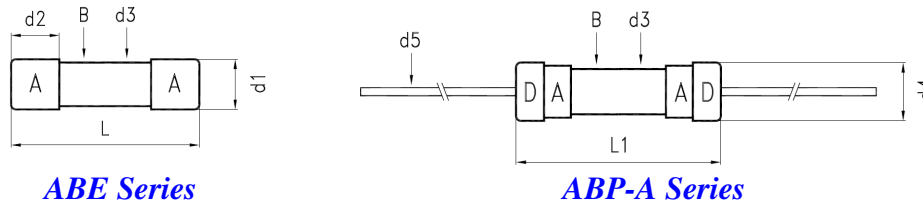

**ABE Series**

**ABP-A Series**

2.1 構造形狀 Structure & Shape : 如上圖 As shown in figure above

2.2 額定電壓 Rated Voltage: 250Vac

2.3 額定電流 Rated Current: 0.1A~40A

3 材料 Material:

3.1 筒管本體: 不透明瓷管不可破裂或變形。

Tube (Body): Non-Transparent ceramic tube fuse. No breaking or deformation is allowed.

3.2 兩端銅蓋: 需以導電率良好之黃銅為材料。

Two brass end caps: Made of brass of good conductivity.

3.3 銅蓋處理: 銅蓋部份鍍鎳，標示最後若加 "S" 者，表示須鍍銀。

Coating of brass caps: Plating the surface with nickel. If the indication is added with "S", it needs to be plated with silver.

NO.	Part Name 部品名稱	Volume 數量
A	Brass Cap - Nickel Plating 銅帽 - 鍍鎳	2
B	Ceramic Tube - Non-Transparent Ceramic Tube 瓷管 - 不透明瓷管	1
C	Fuse Element 可熔體	1
D	Cap-on Lead-Cap - Tinned Copper Wire and Cap 銅帽附腳 - 銅蓋加鍍錫銅線	2
d1	Dia. of Cap - 6.35±0.1mm 銅頭直徑	
d2	Height of Cap - 6.45±0.1mm 銅頭高度	
d3	Dia. of Ceramic - 5.72±0.2mm 瓷管直徑	
d4	Dia. of Cap - 7.00±0.3mm 銅帽直徑	
d5	Dia. of Lead Wire - (註1)±0.05mm 附腳直徑 Length of Lead Wire - 38±2mm 長度	
L	Body of Fuse - 31.75±0.75mm 本體尺寸	
L1	Total Length W/Cap-on on Both Ends 33.0±0.75mm	

※註1 (Note1)

安培數	腳徑
Ampere Rating	Lead Wire
≤12A	φ 0.8 mm
13A~19A	φ 1.0 mm
≥20A	φ 1.2 mm

4 電氣特性 Electrical Characteristics:

4.1 負載容量: 通過額定電流值 100 % ( 亦即 1.0 x In A ) , 能繼續通電至少 4 小時無任何熔化現象。  
Loading Capacity: Loading 100% Rated Current (i.e. 1.0 x In A) for flowing, and it's available to let current keep on flowing at least 4 hour without any melting. (Can keep 4 Hour minimum)

4.2 溫度特性: 通過額定電流值 100% ( 亦即 1.0 x In A ) 1.5 小時, 繼續維持原加之電流, 每隔十分鐘測試一次, 連續測三次, 溫度不得升高, 若使用熱偶式測量方法。  
( Thermocouple method ) 則本體溫升在 (※註2)°C 以下。

Temperature: Loading the 100 % (1.0 x In A ) for 1.5 hours, keep testing it with the original current every 10 minutes. Continue to test it for 3 times. The temperature is not allowed to be higher. The main temperature rise is below (※Note2)°C by way of Thermocouple Method.

※註2 (Note2)

0.1A~15A (75°C)

15.1A~30A (100°C)

30.1A~40A (175°C)

4.3 過載熔斷: 請參照下表。

Melting due to overloading: Details as follows Table.

※最大熔斷時限 Operating Characteristics

安培數 Rating	100% Rating		135% Rating		200% Rating	
	Min.	Max.	Min.	Max.	Min.	Max.
0.1A~30A	4 Hrs	-	-	1 Hrs	-	30 sec
30.1A~40A	4 Hrs	-	-	1 Hrs	-	120 sec

5 機械特性 Mechanical Properties:

5.1 拉力強度: 當施加軸拉力 720g/cm 於兩端附腳 (或銅帽), 無鬆動或損壞現象發生。

Terminal Strength: Leads and/or caps are soldered (adhered) to withstand axial pulling force of 720g/cm without loosening or any harmfulness to firmly attachment.

5.2 彎折強度:

(1) 銅帽附腳腳徑 1.0mm (含) 以下, 經過兩次反向之彎折後 (彎折 90 度再折回原位謂謂之一次彎折) 不發生損壞。

Bending Strength:

Diameter of lead wire ≤ 1.0 mm: After two bends of opposite directions (bending through an angle of 90° and back is defined as one bend) of lead, no damage is to be visualized.



(2) 銅帽附腳腳徑1.2mm(含)以上，距離銅帽附腳卯合處10mm以上，作一次90度之彎折，不發生損壞。

Diameter of lead wire  $\geq 1.2$  mm: Only one bend of an angle of  $90^\circ$  without back shall be tested for each lead wire and the bending position shall be at least 10mm a way from the cap-on. After the test there shall be no damage to be visualized.

#### 6 突波實驗 Pulse Test:

為適應電感或電容性電路所產之暫態電流，本品於10倍額定電流的熔斷時間最少為1ms。  
In order to stand transient current caused by inductive or capacitive, the fuses are designed to have minimum clearing time of 1 millisecond at 1000% rated current.

#### 7 脈波實驗 Cycle Test (On-Off Test):

本實驗乃保證產品之壽命與可靠度，施加60%額定電流之脈波，1分鐘ON，2分鐘OFF，1000次以後，本品不熔斷且內阻變化20%以下。

This test is designed to assure a reliable fuse, Controls are set giving 60% of rated ampere. 1 minute ON, 2 minutes OFF per time, the fuse will not open before 1000 times and the internal resistance change will be below 20%.

#### 8 遮斷能力 Interrupting Rating:

0.1A~20A:	10000 amperes at 125Vac
0.1A~1A:	35 amperes at 250Vac
0.1A~10A:	750 amperes at 250Vdc
1.25A~3.5A:	100 amperes at 250Vac
3.75A~10A:	200 amperes at 250Vac
10.1A~15A:	750 amperes at 250Vac/dc
15.1A~20A:	750 amperes at 250Vac/dc
20.1A~30A:	100 amperes at 250Vac 400 amperes at 125Vdc 1000 amperes at 125Vac
30.1A~40A:	1000 amperes at 250Vac (ABE) 400 amperes at 150Vdc (ABE)

#### 9 包裝 Packing:

ABE-500PCS/盒(一箱數量:5000PCS); ABP-A-250 PCS/盒(一箱數量:5000PCS)

內盒印明下列標示:料號、額定(電壓、電流、遮斷能力)及安規名稱。

包裝材料均符合RoHS或者HF的環保要求,且包裝材料不會和零件發生化學反應,造成不良。

ABE-500 pcs in an inner box. (Outter box Q'ty:5000pcs);

ABP-A-250 pcs in an inner box. (Outter box Q'ty:5000pcs)

The following items indicated on the box. Mark: Catalog number; ratings (voltage, current, interrupting capacity), and safety mark. The packing material conforms to ROHS or the HF environmental protection request. And the packing material can't have the chemical reaction with the components.

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Offical Website: <http://www.conquer.com.tw>



10 其他 Other:

10.1 除非另有指定，上述機械、電器特性，係於常溫，標準狀況下測試之。

Unless otherwise, specified, all tests to be performed at 25±5°C and 35-75% RH.

10.2 於標準狀況下儲放一年，本品乃確保上述機械與電氣之特性。

After one year's storage under normal condition, this item is guaranteed to meet the requirements mentioned above.

11 標記/安規認證 Mark/ Safety Certification:

*ABE Series*

Mark Approvals							Nominal Resistance	Nominal Melting I <sup>2</sup> t
							Cold Ohms	A <sup>2</sup> Sec
100 mA	**		**				14.600	0.0027
125 mA	**		**				10.200	0.0042
150 mA	**		**				7.7000	0.0061
160 mA	**		**				7.0000	0.0069
200 mA	**		**				6.0000	0.0108
250 mA	**		**				3.6150	0.0141
300 mA	**		**				2.8000	0.0243
315 mA	**		**				2.3000	0.0267
350 mA	**		**				2.0000	0.0441
375 mA	**		**				1.9540	0.0443
400 mA	**		**				1.4000	0.0720
500 mA	**		**				0.6879	0.1603
600 mA	**		**				0.4740	0.2013
630 mA	**		**				0.4287	0.2143
700 mA	**		**				0.3500	0.2646
750 mA	**		**				0.3129	0.3544
800 mA	**		**				0.2828	0.4032
1 A	**		**				0.1886	0.7200
1.25 A	**		**				0.1428	1.2713
1.5 A	**		**				0.1132	1.8225
2 A	**		**				0.1987	5.3880
2.5 A	**		**				0.0794	5.6250
3 A	**		**				0.0635	7.1280
3.5 A	**		**				0.0538	10.584
4 A	**		**				0.0329	13.824
4.5 A	**		**				0.0302	27.338
5 A	**		**				0.0286	33.750
6 A	**		**		**		0.0233	58.450
6.3 A	**		**		**		0.0184	73.514

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Official Website: http://www.conquer.com.tw



### ABE Series

Mark Approvals							Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
7 A	**		**		**		0.0164	88.200
7.5 A	**		**		**		0.0143	101.25
8 A	**		**		**		0.0124	115.20
10 A	**		**		**		0.0105	255.46
12 A	**		**		**		0.0086	398.39
13 A	**		**		**		0.0085	517.14
15 A	**		**		**		0.0061	567.00
16 A		**		**		*	0.0060	645.12
18 A		**		**		*	0.0055	874.80
20 A		**		**		*	0.0044	1283.0
25 A		**		**		*	0.0036	2691.0
30 A		*				**	0.0026	4155.3
40 A						**	0.0016	9100.8

\*: 有安規認證 Have safety certify

\*\* : 有安規認證及銅帽上有安規印字標記 Have safety certify and safety mark on the cap

### ABP-A Series

Mark Approvals							Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
100 mA	**		**				14.600	0.0027
125 mA	**		**				10.200	0.0042
150 mA	**		**				7.7000	0.0061
160 mA	**		**				7.0000	0.0069
200 mA	**		**				6.0000	0.0108
250 mA	**		**				3.6150	0.0141
300 mA	**		**				2.8000	0.0243
315 mA	**		**				2.3000	0.0267
350 mA	**		**				2.0000	0.0441
375 mA	**		**				1.9540	0.0443
400 mA	**		**				1.4000	0.0720
500 mA	**		**				0.6879	0.1603
600 mA	**		**				0.4740	0.2013
630 mA	**		**				0.4287	0.2143
700 mA	**		**				0.3500	0.2646
750 mA	**		**				0.3129	0.3544
800 mA	**		**				0.2828	0.4032
1 A	**		**				0.1886	0.7200

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Official Website: <http://www.conquer.com.tw>



**ABP-A Series**

Mark Approvals							Nominal Resistance Cold Ohms	Nominal Melting I <sup>2</sup> t A <sup>2</sup> Sec
1.25 A	**		**				0.1428	1.2713
1.5 A	**		**				0.1132	1.8225
2 A	**		**				0.1987	5.3880
2.5 A	**		**				0.0794	5.6250
3 A	**		**				0.0635	7.1280
3.5 A	**		**				0.0538	10.584
4 A	**		**				0.0329	13.824
4.5 A	**		**				0.0302	27.338
5 A	**		**				0.0286	33.750
6 A	**		**		**		0.0233	58.450
6.3 A	**		**		**		0.0184	73.514
7 A	**		**		**		0.0164	88.200
7.5 A	**		**		**		0.0143	101.25
8 A	**		**		**		0.0124	115.20
10 A	**		**		**		0.0105	255.46
12 A	**		**		**		0.0086	398.39
13 A	**		**		**		0.0085	517.14
15 A	**		**		**		0.0061	567.00
16 A		**		**		*	0.0060	645.12
18 A		**		**		*	0.0055	874.80
20 A		**		**		*	0.0044	1283.0
25 A		**		**		*	0.0036	2691.0
30 A		*				**	0.0026	4155.3

\*: 有安規認證 Have safety certify

\*\* : 有安規認證及銅帽上有安規印字標記 Have safety certify and safety mark on the cap

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Offical Website: <http://www.conquer.com.tw>




## 12 產品描述 Product Description :

描述 Description	安培數 Ampere Rating
U/C ABE ___A ___V(PF) U/C ABP-A ___A ___V(PF)	0.1A~15A
RU ABE ___A ___V(PF) RU ABP-A ___A ___V(PF)	15.1A~25A
CRU ABE ___A ___V(PF)	25.1A~40A
CRU ABP-A ___A ___V(PF)	25.1A~30A

例:                                       **A**           **V**           **(PF)**  
                  **1**            **2**            **3**            **4**            **5**

- 1 安規認證 Safety Approval
- 2 系列品名 Series Model : ABE/ABP-A
- 3 安培數 Ampere Rating : 0.1A~40A
- 4 伏特數 Voltage : 250V
- 5 無鉛標示 Pb free : (PF)

## 13 安裝方式及條件 Installation Way and Parameters:

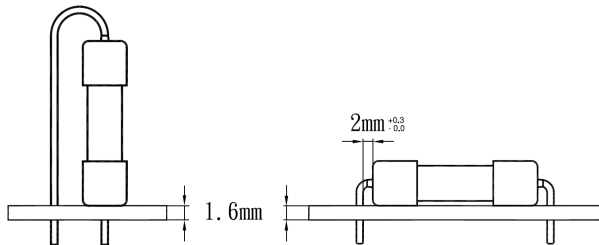


## 14 建議生產參數(無鉛焊錫使用)

Recommended Process Parameters(for the action to Lead-free solder alloy) :

14.1 波峰參數 Wave Parameter	預熱溫度 Preheat temperature 最低溫度：100度 Temperature Minimum : 100°C 最高溫度：150度 Temperature Maximum : 150°C	錫槽溫度 Solder Pot Temperature 260度 Maximum 260°C Maximum 焊接時間 2~5 seconds Solder Dwell Time: 2~5 seconds
14.2 建議手持烙鐵焊接參數 Recommended Hand-Solder Parameters	烙鐵溫度：350°C +/-5°C Solder Iron Temperature : 350°C +/-5°C 加熱時間：5 seconds max. Heating Time : 5 seconds max.	



15 It曲線圖 Clear Time Curve(I vs t curve)

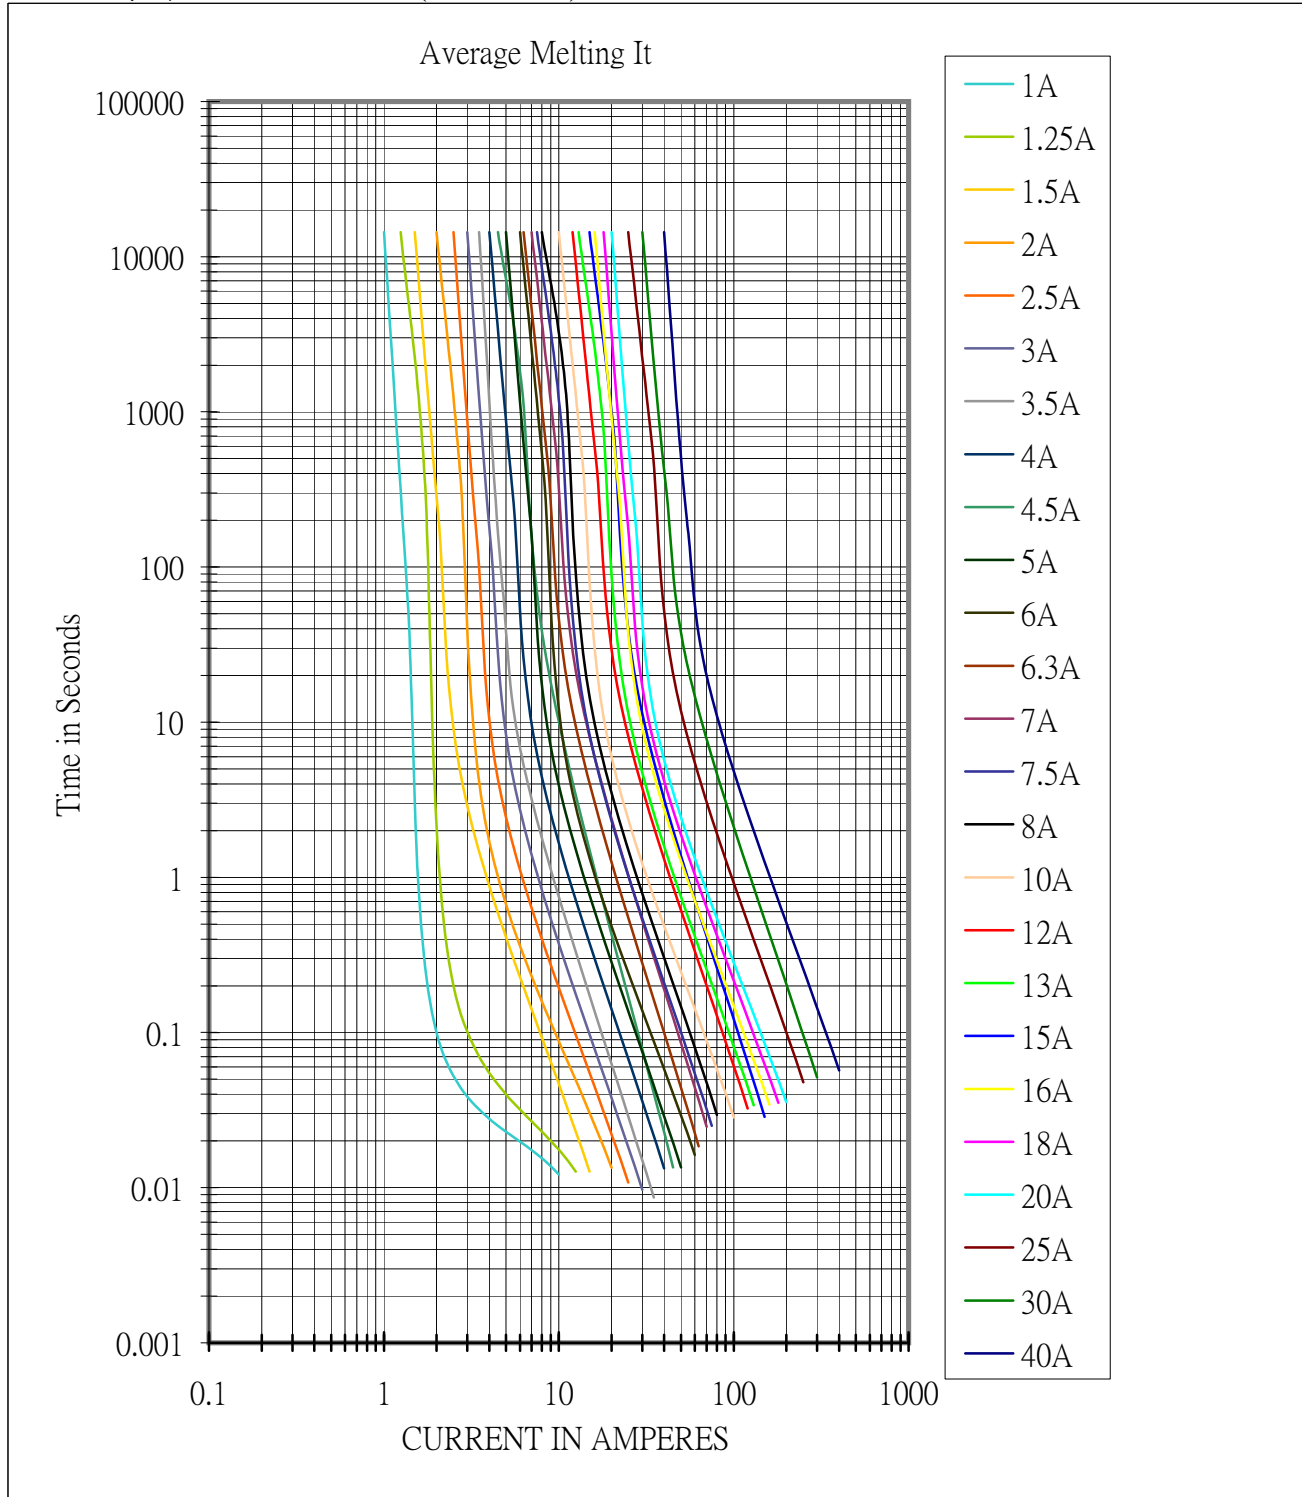

Conquer Electronics Co., LTD.


No.26, Wucyuan 5th Rd., Wugu Dist.,(New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Official Website: <http://www.conquer.com.tw>



16  $I^2t$  曲線圖 Standing Pulse ( $I^2t$  vs t curve)

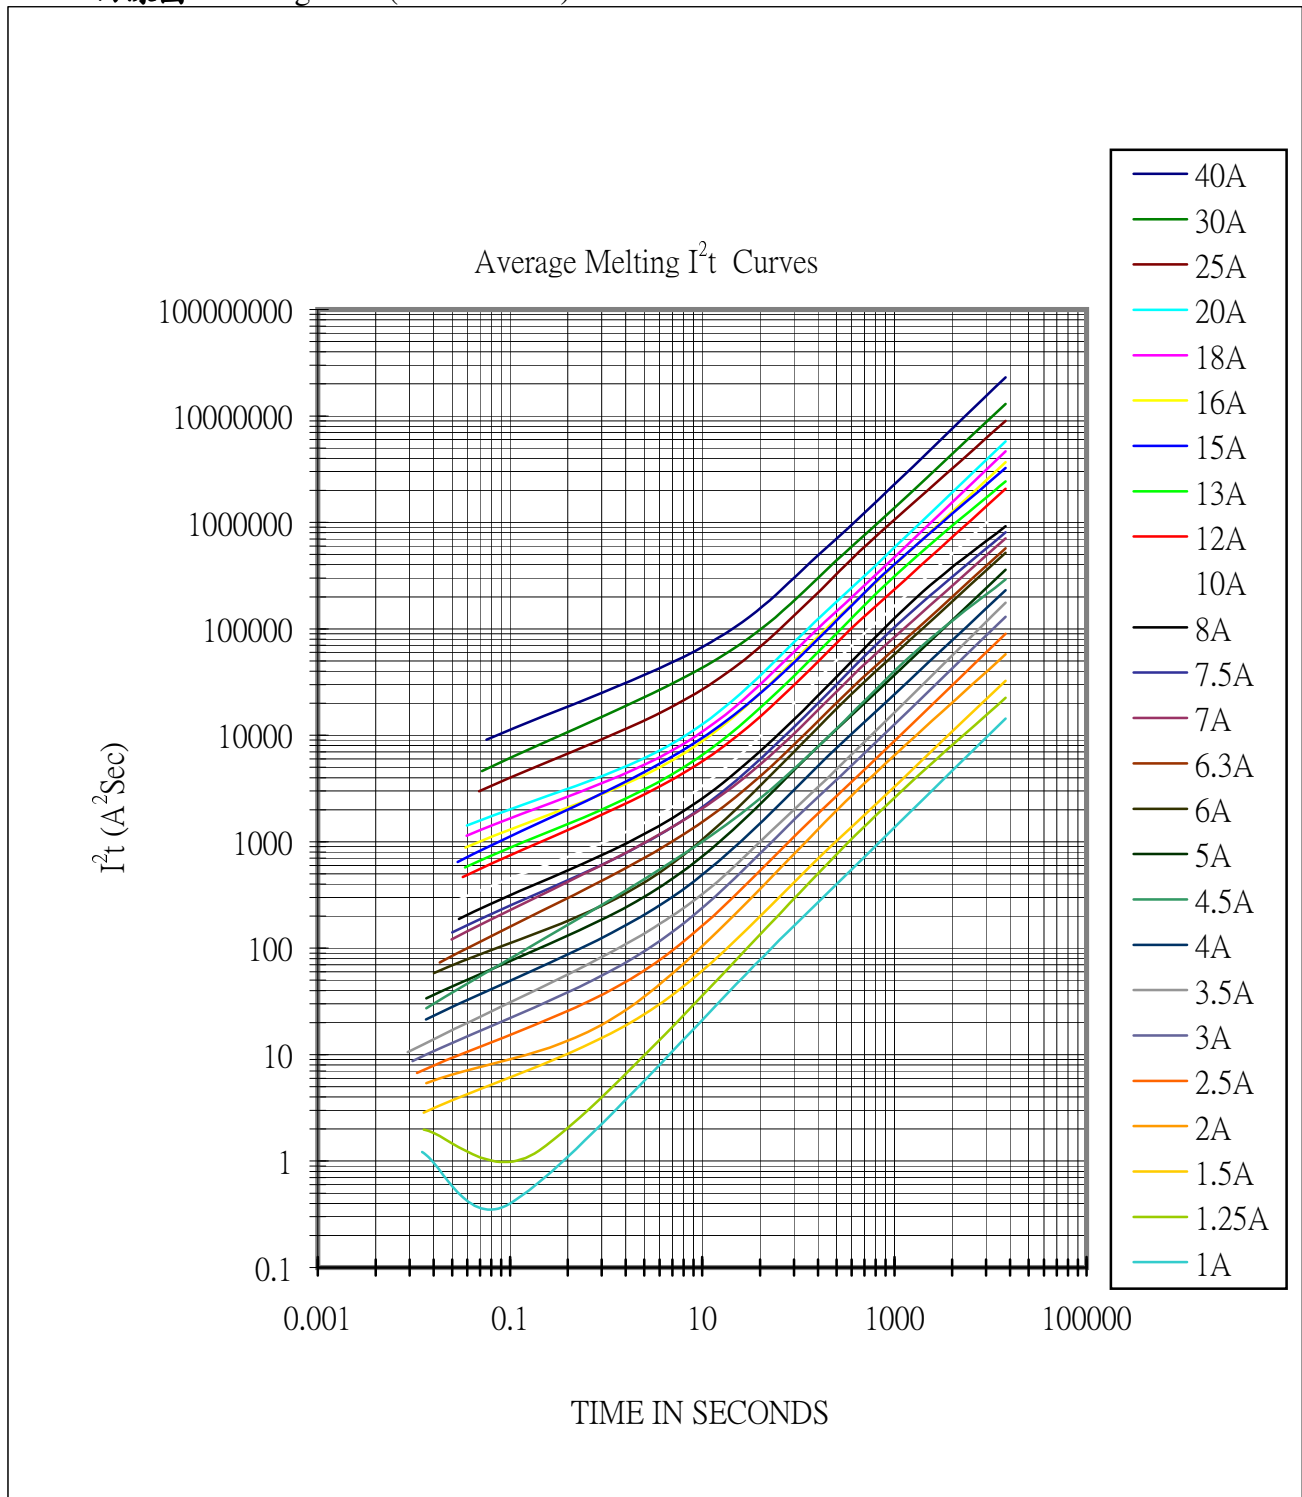

Conquer Electronics Co., LTD.

No.26, Wucyuan 5th Rd., Wugu Dist., (New Taipei Industrial Park) New Taipei City 24888, Taiwan TEL:+886-2-8990-2189 (代表號) FAX:+886-2-8990-2577

Peitou Factory : No. 15, Lane 120, Lite Road, Peitou, 11259, Taipei, Taiwan. TEL: +886-2-2895-8895 (代表號) FAX:+886-2-2895-8880

E-mail: conqfuse@ms62.hinet.net Official Website: <http://www.conquer.com.tw>

## Product Characteristics & Reliability Tests

Test item	Test Description & Reference
<b>Humidity unload test</b>	MIL-STD-202G , Method 103B , Test Condition A Heat (40±0.5°C) & High Humidity (95±1 % RH), 240 hours , ΔR<15%
<b>Thermal shock test</b>	MIL-STD-202G, Method 107g , Test Condition B Temperature setup : 25°C ~ -65°C ~ 25°C ~ 125°C Time setup : -65°C (30min)~25°C (5min)~125°C (30min)~ 25°C (5min) 5 cycles , ΔR<15%
<b>Vibration test</b>	MIL-STD-202G , Method 201A Frequency setup : 10 ~ 55 ~ 10 Hz Time setup : 1 Minutes/cycle (X-Y-Z,120 Cycles) 6hrs, ΔR<15%
<b>Salt spray Test</b>	MIL-STD-202G , Method 101E , Test Condition A Salt spray concentration : 5 ± 1% Test liquid temperature : 35 ± 0.5°C 96hrs, ΔR<15%
<b>Solderability test</b>	Reference IEC 60068-2-20 Temperature setup : 250 ± 3°C , 3 ± 0.3 sec After test terminal electrode wetting area must be greater than 95%
<b>Resistance to Solder Heat Test</b>	Reference IEC 60068-2-20 Temperature setup : 260± 3°C , 10± 1 sec ΔR<15%

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Conquer manufacturer](#):*

Other Similar products are found below :

[ABB 25A 500V](#) [ABB 30A 500V](#) [ABE 10A 250V](#) [ABE 15A 250V](#) [ABE 16A 250V](#) [ABE 20A 250V](#) [ADA 15A 250V](#) [ADA 20A 250V](#) [ADA 25A 250V](#) [CQ06LF 5A 32V](#) [CQ06LT 5A 32V](#) [CQ12LH 5A 63V](#) [CQ12LI 25A 63V](#) [CQ12LV 20A 24V](#) [CQ12LV 5A 63V](#) [CQ12LV 8A 125V](#) [CRU CQ06LT5A32V](#) [MMT 1.25A 250V](#) [MMT 1.6A 250V](#) [MSF 2A 250V](#) [MSF 4A 250V](#) [MSF 5A 250V](#) [MSF 6.3A 250V](#) [MSF 800MA 250V](#) [MST 1.6A 250V](#) [MST 3.15A 250V](#) [MST 315mA 250V](#) [MST 400MA 250V](#) [MST 500MA 250V](#) [SEF 0.375A 125V \(G\)](#) [SEF 0.6A 125V \(G\)](#) [SEF 1.5A 125V \(G\)](#) [SEF 2A 125V \(G\)](#) [SEF 3A 125V \(G\)](#) [SEF 6A 125V \(G\)](#) [SEI 2A 250V\(G\)](#) [SET 2A 125V \(G\)](#) [SET 7A 125V \(G\)](#) [UBF 25A 420V](#) [UBM 12.5A 250V](#) [UBM 16A 250V](#) [UBM 2A 250V](#) [UBM 3.15A 250V](#) [UBM 4A 250V](#) [UBM 5A 250V](#) [UBM 6.3A 250V](#) [UBM 8A 250V](#) [UDA 10A 250V](#) [UDA 1.25A 250V](#) [UDA 12A 250V](#)