

CQ12LV

3.1 x 1.6 mm (1206)

Fast-Acting Fuse

Used in wireless chargers



Agency Approvals

Agency	Ampere Rating
Recognized Component for Canada and US	1A - 20A

Electrical Characteristics

Ampere Rating	Opening Time	
	1 In	2.5 In
	MIN	MAX
1A - 20A	4 hr	5 sec

Interrupting Rating

1A - 8A:	100 amperes at 63V DC 50 amperes at 125V DC
10A - 20A:	150 amperes at 24V DC

Product Characteristics

Operating Temperature	-55 °C to 150°C
Material	Body: Ceramic Termination: Silver(Ag) / Nickel(Ni) / Tin(Sn) Fuse Element: Silver(Ag)

Packaging

Packaging Option	Quantity
On Tape	4,000 pcs / reel

Catalog Number	Marking	Ampere Rating (A)	Voltage Rating (V)	Nominal Cold Resistance (Ohms)	Nominal Melting I ² t (A ² sec.)
CQ12LV 001	H	1A	63V	0.250	0.090
CQ12LV 1.50	K	1.5A		0.110	0.113
CQ12LV 002	N	2A		0.065	0.160
CQ12LV 2.50	O	2.5A		0.030	0.188
CQ12LV 003	P	3A		0.026	0.225
CQ12LV 3.50	R	3.5A		0.020	0.245
CQ12LV 004	S	4A		0.015	0.320
CQ12LV 005	T	5A		0.010	0.750
CQ12LV 006	U	6A		0.009	0.900
CQ12LV 007	V	7A		0.008	1.470
CQ12LV 008	W	8A	0.007	1.728	
CQ12LV 010	10	10A	24V	0.006	3.000
CQ12LV 012	12	12A		0.005	4.320
CQ12LV 015	15	15A		0.004	6.750
CQ12LV 020	20	20A		0.003	16.00

* Measured at ≤ 10% of rated current at 25° C


* Melting I²t at 1000% of current rating

* Certified (cRUus) and Customized up to 125V

* Application testing is strongly recommended

* Surface Mount Fuse is a small device designed for secondary protection of circuits used in space constrained applications.

Mechanical Dimensions (mm)

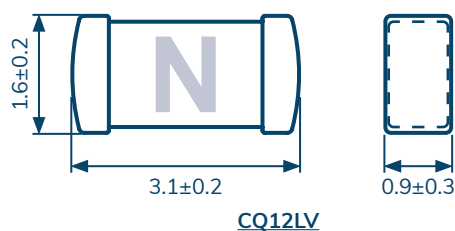

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Surface Mount Fuses](#) category:

Click to view products by [Conquer](#) manufacturer:

Other Similar products are found below :

[FHC20402ADTP](#) [NFVC6125S0R50TRF](#) [TF16SN2.00TTD](#) [FCC16501ABTP](#) [FCC16102ABTP](#) [FHC16322ADTP](#) [0308001.UR](#)
[FCC16202ABTP](#) [F0603G0R03FNTR](#) [7010.9962.63](#) [SEF 12A 65V \(G\)](#) [MST 250mA 250V](#) [TB60](#) [06 100.4](#) [TBF50](#) [TBF40](#)
[2010T315mA250V](#) [06 110.7](#) [12 100.1.5](#) [06 110.5](#) [1206FA-R250](#) [R06.100.6](#) [R12.100.15](#) [R06.000.0.375](#) [R06.000.6](#) [R06.100.0.25](#) [R12.000.8](#)
[R06.000.0.5](#) [R06.000.0.75](#) [R06.000.8](#) [R06.100.0.75](#) [R06.100.8](#) [R06.100.0.375](#) [R06.100.0.5](#) [R06.000.7](#) [R06.100.7](#) [S0603-S-2.0A](#) [F06F3.5](#)
[F12F20](#) [TA3VT2](#) [F12F1](#) [F06F7](#) [F06T3.5](#) [F06F0.375](#) [F06T8](#) [F12F30](#) [4T2A250V](#) [R12.100.7](#) [R12.100.30](#) [R06.000.0.25](#)