
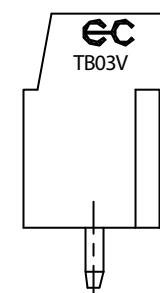
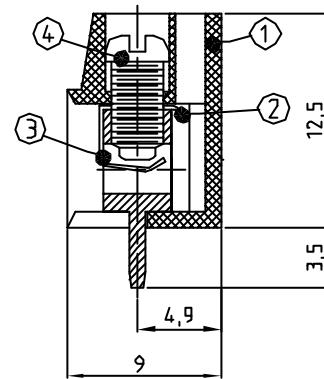
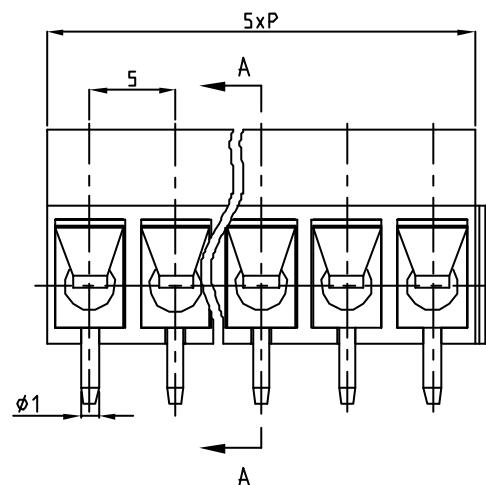
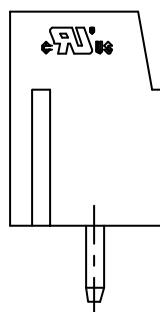


used for:

NOTES:

- 1,Rating:310V 16A;
- 2,Insulation Withstands Voltage:
AC1000V/MIN
- 3,Insulation Resistance:
1000MΩ or more at DC500V
- 4,Using Temperature Range:
-40°C--+105°C
- 5,Screw Torque Value:4.4kg-cm
- 6,Suitable Electric Wire:
12-22AWG

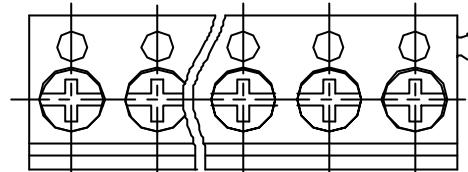

Pitch range in mm		Nominal dimension range		radius	chamfer	short angle side	/	=	-	□	//
2 8	10 16 24	16 24 32	24 32 40	1.5 3 6	over to over						
10 16	24 32	32 40	40 48	3 6	1.5 3 6						
±0.05	±0.13	±0.17	±0.21	±0.1	±0.2	±0.15	±0.15	±0.15	±0.15	±0.15	±0.15

REV. CONTENT CHK. DATE

IMO

4	Screw	SI11102700	P	Steel	Zinc-Plated
3	Pin	C000015711	P	HPb59-1	Tin-Plated
2	Clamp	H05M11111	P	QSn6.5-0.1	Ni-Plated
1	Housing	H116P01211	1	PBT G20	UL94 V-II
ITEM	NAME OF PART	NO OF PART	Q'TY	MATERIAL	NOTE
DWG.	CHENR	DATE	2004/02/16	UNITS	MN SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	20.101M
				DWG NO.	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for imo manufacturer:

Other Similar products are found below :

[20.155MV/12-E](#) [MC14N-S-10110AC](#) [MB09-S-10=24](#) [DPS-1-030-24](#) [SRF-1C-SL-12VDC](#) [MB09-S-1024](#) [LDC18RRS](#) [SFSYE0111](#)
[21.1500M/6-E](#) [20.3304M/2-E](#) [21.910M/5-E](#) [20.95MA/2-E](#) [21.95MHF/2-E](#) [PE69-4032](#) [DPS-1-060-24](#) [CS20A-A2](#) [CS20A-U1](#) [VFC02](#)
[MSSTC11DA06](#) [20.95MHF/3-E](#) [B3T10](#) [XKL-040-21](#) [20.3304M/4-E](#) [SRDH-1A-SL-24VDC](#) [20.2500M/5-E](#) [21.155MH/12](#) [SRRHN-2CN-](#)
[SL-12VDC](#) [QYE21XXF24DC](#) [20.920M/5-E](#) [MC10N-S-10110AC](#) [21.1550MF/8-E](#) [20.910M/6-E](#) [20.95MH/3-E](#) [21.95MV/3](#) [MA05-S-](#)
[01230AC](#) [SRRHN-2CN-SL-5VDC](#) [LB69-4040](#) [20.3001M/6](#) [21.1500M/3-E](#) [SFSYE0311](#) [21.95MHF/6-E](#) [20.95MV/2-E](#) [20.155MV/4-E](#)
[20.155MH/4-E](#) [20.950M/2-E](#) [MT5 1-50-FAR](#) [BS3P3REDO](#) [MB12-S-10=24](#) [MA05-S-1024DC](#) [20.155MVF/8-E](#)