


PLA15F

① PL ② A ③ 15 ④ F ⑤ -□ ⑥ -□



Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
C : with Coating
J : Connector interface
T : Vertical terminal block
-N□ : with DIN rail

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

| | MODEL | PLA15F-5 | PLA15F-12 | PLA15F-15 | PLA15F-24 | |
|------------------------------------|---|--|--|-------------------|-------------------|-------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | |
| | CURRENT[A] | ACIN 100V | 0.4typ (Io=90%) | | | |
| | | ACIN 115V | 0.4typ (Io=100%) | | | |
| | | ACIN 230V | 0.25typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 72.5typ (Io=90%) | 75.5typ (Io=90%) | 77.0typ (Io=90%) | 78.0typ (Io=90%) |
| | | ACIN 115V | 73.5typ (Io=100%) | 77.0typ (Io=100%) | 78.5typ (Io=100%) | 79.0typ (Io=100%) |
| | | ACIN 230V | 75.5typ (Io=100%) | 78.5typ (Io=100%) | 79.5typ (Io=100%) | 80.0typ (Io=100%) |
| | INRUSH CURRENT[A] | ACIN 100V | 16typ (Io=90%) Ta=25°C at cold start | | | |
| | | ACIN 115V | 16typ (Io=100%) Ta=25°C at cold start | | | |
| ACIN 230V | | 32typ (Io=100%) Ta=25°C at cold start | | | | |
| LEAKAGE CURRENT[ma] | 0.30max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 3 | 1.3 | 1 | 0.7 | |
| | WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | |
| | | ACIN 115V-264V | 15.0 | 15.6 | 15.0 | 16.8 |
| | LINE REGULATION[mV] *4 | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] *4 | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] *1 | 0 to +50°C | 80max | 120max | 120max | 120max |
| | | -10 to 0°C | 140max | 160max | 160max | 160max |
| | | Io=0 to 35% | 160max | 240max | 240max | 280max |
| | RIPPLE NOISE[mVp-p] *1 | 0 to +50°C | 120max | 150max | 150max | 150max |
| | | -10 to 0°C | 160max | 180max | 180max | 180max |
| | | Io=0 to 35% | 240max | 300max | 300max | 320max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C | 50max | 120max | 150max | 240max |
| | | -10 to +50°C | 60max | 150max | 180max | 290max |
| | DRIFT[mV] *2 | 20max | 48max | 60max | 96max | |
| START-UP TIME[ms] | 200typ (ACIN 115V, Io=100%) *Start-up time is 700 ms typ for less than 1 minute of applying input again from turning off the input voltage. | | | | | |
| HOLD-UP TIME[ms] | 20typ (ACIN 115V, Io=100%) | | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 4.50 to 5.50 | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | | |
| OUTPUT VOLTAGE SETTING[V] | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.75 to 7.00 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE SENSING | Not provided | | | | |
| REMOTE ON/OFF | Not provided | | | | | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT-FG | AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, UL508 (Except option -J) Complies with DEN-AN | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR *8 | Complies with IEC61000-3-2 class A | | | | |

SPECIFICATIONS

| | | |
|----------|------------------|--|
| OTHERS | CASE SIZE/WEIGHT | 38 X 80 X 73mm [1.50 X 3.15 X 2.87 inches] (Excluding terminal block and screw) (W X H X D) / 250g max |
| | COOLING METHOD | Convection |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |


- *1 This is the result of measurement of the testing board with capacitors of 22 μF and 0.1 μF placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details. When the load factor is 0 - 35%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 35% load or less.

- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about other classes.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.


Features

- Compact design (Depth: 73mm 2.87inches)
- Low power consumption (1.0W typ AC240Vin, no load at standard model)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

Block diagram

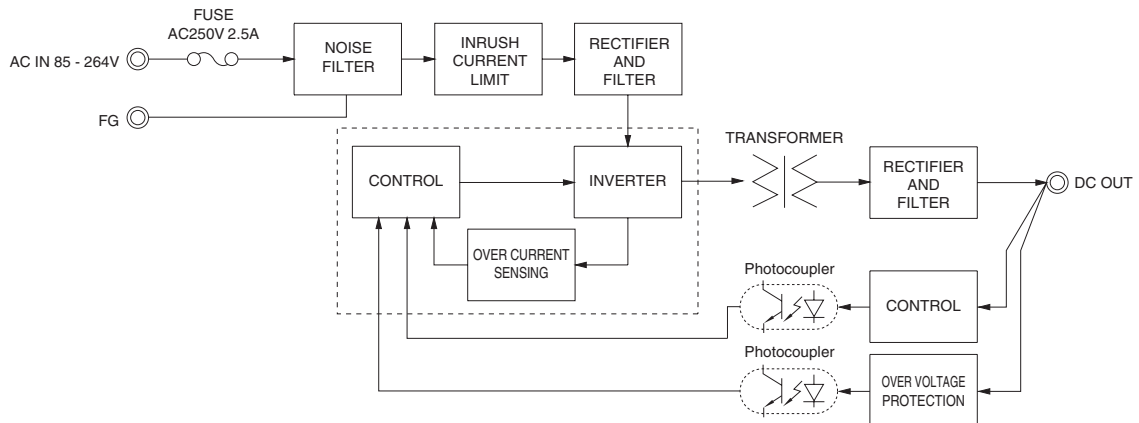


External view

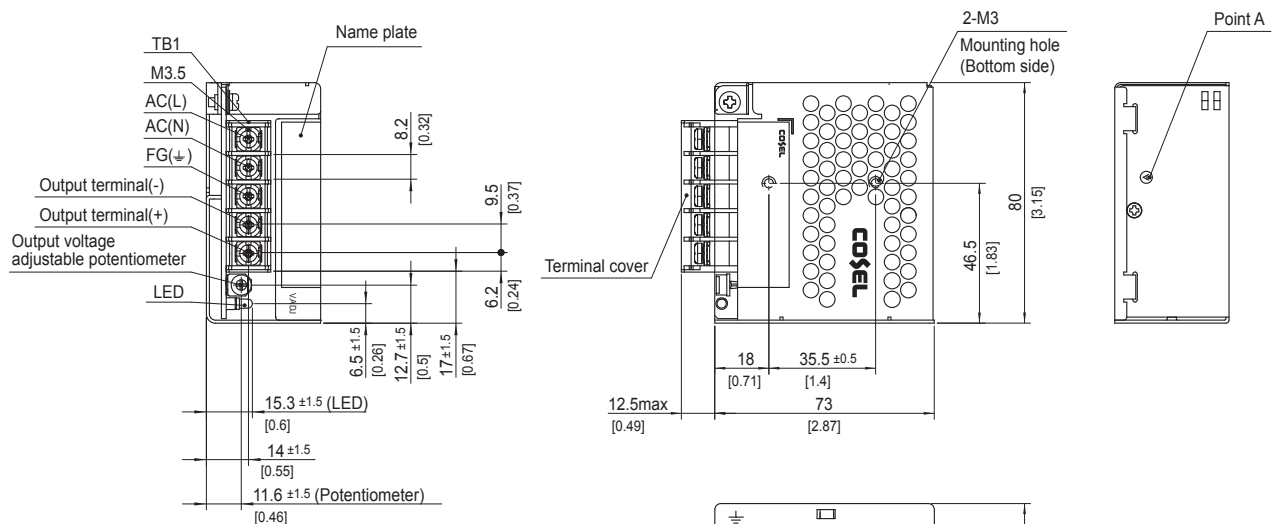

- ※ Tolerance : ±1 [±0.04]
- ※ Weight : 250g max
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- ※ Chassis material : Electric galvanizing steel board
- ※ Case material : Electric galvanizing steel board
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : 0.6N · m max
- ※ Screw tightening torque : 1.0N · m max

PLA30F

PL A 30 F -□ -□
 ① ② ③ ④ ⑤ ⑥



Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
 Low leakage current type : NAM series
 * A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- J : Connector interface
- T : Vertical terminal block
- N□ : with DIN rail

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

| | MODEL | PLA30F-5 | PLA30F-12 | PLA30F-15 | PLA30F-24 | |
|------------------------------------|---|--|--|-------------------|-------------------|-------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | |
| | CURRENT[A] | ACIN 100V | 0.7typ (Io=90%) | | | |
| | | ACIN 115V | 0.7typ (Io=100%) | | | |
| | | ACIN 230V | 0.4typ (Io=100%) | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 73.0typ (Io=90%) | 80.0typ (Io=90%) | 81.0typ (Io=90%) | 82.5typ (Io=90%) |
| | | ACIN 115V | 74.0typ (Io=100%) | 80.5typ (Io=100%) | 81.5typ (Io=100%) | 83.0typ (Io=100%) |
| | | ACIN 230V | 77.0typ (Io=100%) | 81.0typ (Io=100%) | 82.0typ (Io=100%) | 83.5typ (Io=100%) |
| INRUSH CURRENT[A] | ACIN 100V | 16typ (Io=90%) Ta=25°C at cold start | | | | |
| | ACIN 115V | 16typ (Io=100%) Ta=25°C at cold start | | | | |
| | ACIN 230V | 32typ (Io=100%) Ta=25°C at cold start | | | | |
| LEAKAGE CURRENT[ma] | 0.65max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 6 | 2.5 | 2 | 1.3 | |
| | WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | |
| | | ACIN 115V-264V | 30.0 | 30.0 | 30.0 | 31.2 |
| | LINE REGULATION[mV] *4 | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] *4 | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] *1 | 0 to +50°C | 80max | 120max | 120max | 120max |
| | | -10 to 0°C | 140max | 160max | 160max | 160max |
| | RIPPLE NOISE[mVp-p] *1 | 0 to +50°C | 120max | 150max | 150max | 150max |
| | | -10 to 0°C | 160max | 180max | 180max | 180max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C | 50max | 120max | 150max | 240max |
| | | -10 to +50°C | 60max | 150max | 180max | 290max |
| | DRIFT[mV] *2 | 20max | 48max | 60max | 96max | |
| | START-UP TIME[ms] | 150typ (ACIN 115V, Io=100%) | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 115V, Io=100%) | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 4.50 to 5.50 | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | | |
| OUTPUT VOLTAGE SETTING[V] | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.75 to 7.00 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE SENSING | Not provided | | | | |
| | REMOTE ON/OFF | Not provided | | | | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT-FG | AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, UL508 (Except option -J) Complies with DEN-AN | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR *8 | Complies with IEC61000-3-2 class A | | | | |

SPECIFICATIONS

| | | |
|----------|------------------|--|
| OTHERS | CASE SIZE/WEIGHT | 38×80×88mm [1.50×3.15×3.46 inches] (Excluding terminal block and screw) (W×H×D) / 330g max |
| | COOLING METHOD | Convection |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |


- *1 This is the result of measurement of the testing board with capacitors of 22 μF and 0.1 μF placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.
See 1.6 of Instruction Manual for more details.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response.
- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.

- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about other classes.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.


Features

- Compact design (Depth: 88mm 3.46inches)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

Block diagram

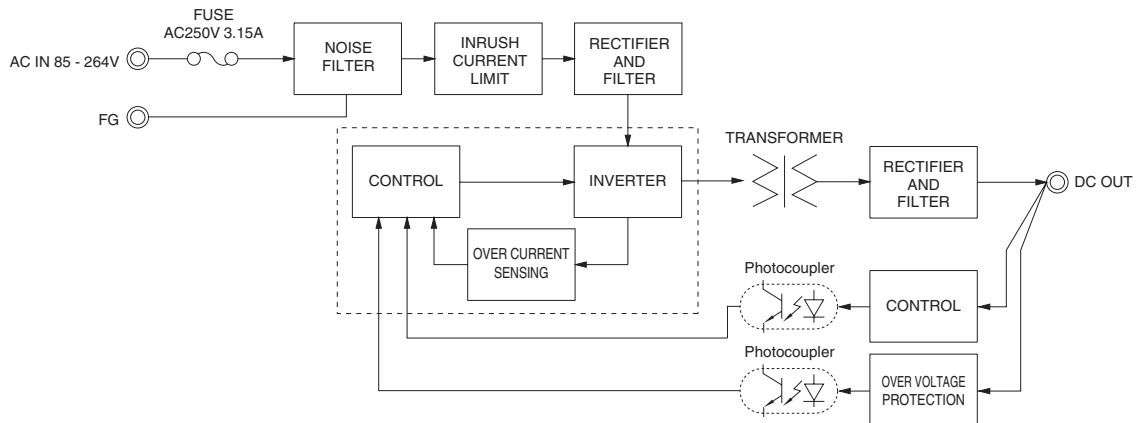


External view

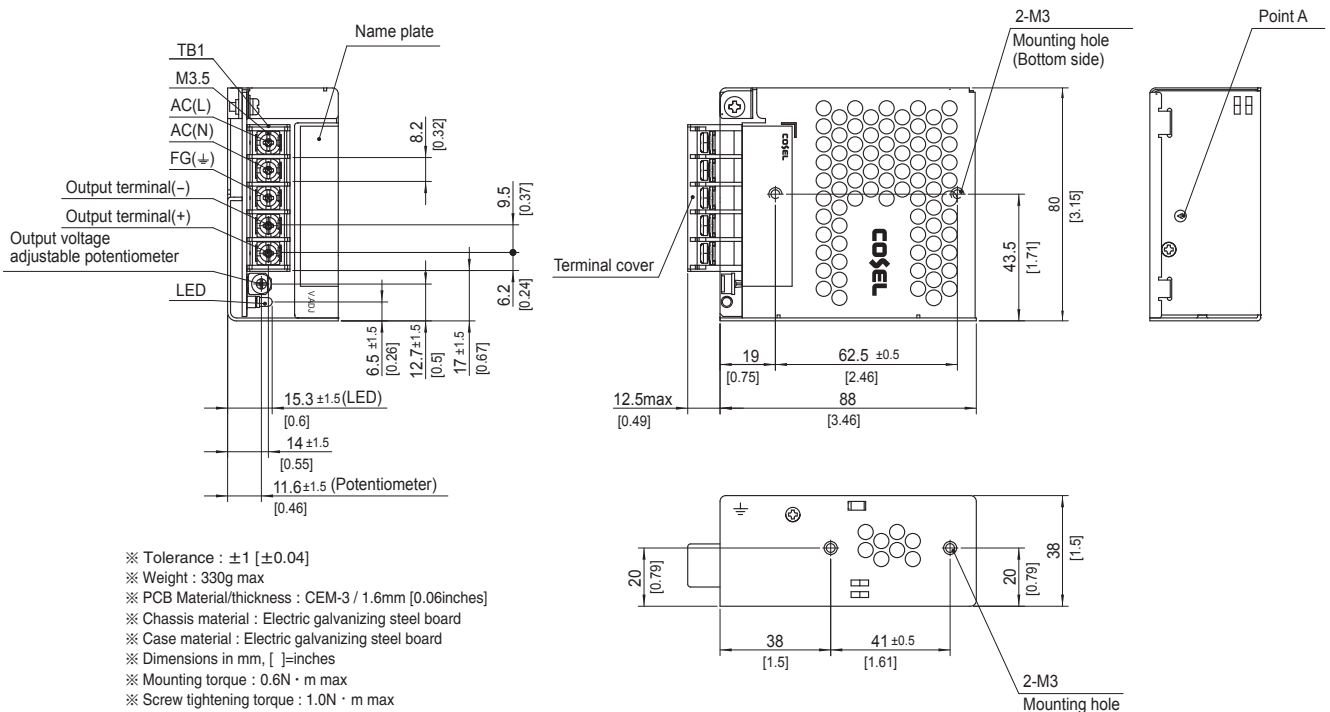

PLA50F

① **PL** ② **A** ③ **50** ④ **F** ⑤ **-□** ⑥ **-□**



Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- J : Connector interface
- T : Vertical terminal block
- N□ : with DIN rail

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

| | MODEL | PLA50F-5 | PLA50F-12 | PLA50F-15 | PLA50F-24 | |
|------------------------------------|---|--|--|-------------------|-------------------|-------------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | |
| | CURRENT[A] | ACIN 100V | 0.6typ (Io=90%) | 0.7typ (Io=90%) | | |
| | | ACIN 115V | 0.6typ (Io=100%) | 0.7typ (Io=100%) | | |
| | | ACIN 230V | 0.3typ (Io=100%) | 0.4typ (Io=100%) | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | |
| | EFFICIENCY[%] | ACIN 100V | 74.5typ (Io=90%) | 80.0typ (Io=90%) | 80.0typ (Io=90%) | 81.5typ (Io=90%) |
| | | ACIN 115V | 75.0typ (Io=100%) | 80.5typ (Io=100%) | 80.5typ (Io=100%) | 82.0typ (Io=100%) |
| | | ACIN 230V | 76.5typ (Io=100%) | 82.0typ (Io=100%) | 82.0typ (Io=100%) | 84.0typ (Io=100%) |
| | POWER FACTOR | ACIN 100V | 0.97typ (Io=90%) | 0.98typ (Io=90%) | | |
| | | ACIN 115V | 0.97typ (Io=100%) | 0.98typ (Io=100%) | | |
| ACIN 230V | | 0.85typ (Io=100%) | 0.87typ (Io=100%) | | | |
| INRUSH CURRENT[A] | ACIN 100V | 16typ (Io=90%) Ta=25°C at cold start | | | | |
| | ACIN 115V | 16typ (Io=100%) Ta=25°C at cold start | | | | |
| | ACIN 230V | 32typ (Io=100%) Ta=25°C at cold start | | | | |
| LEAKAGE CURRENT[ma] | 0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | |
| | CURRENT[A] | 8 | 4.3 | 3.5 | 2.2 | |
| | WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | |
| | | ACIN 115V-264V | 40.0 | 51.6 | 52.5 | 52.8 |
| | LINE REGULATION[mV] *4 | 20max | 48max | 60max | 96max | |
| | LOAD REGULATION[mV] *4 | 40max | 100max | 120max | 150max | |
| | RIPPLE[mVp-p] *1 | 0 to +45°C | 80max | 120max | 120max | 120max |
| | | -10 to 0°C | 140max | 160max | 160max | 160max |
| | RIPPLE NOISE[mVp-p] *1 | 0 to +45°C | 120max | 150max | 150max | 150max |
| | | -10 to 0°C | 160max | 180max | 180max | 180max |
| | TEMPERATURE REGULATION[mV] | 0 to +45°C | 50max | 120max | 150max | 240max |
| | | -10 to +45°C | 60max | 150max | 180max | 290max |
| | DRIFT[mV] *2 | 20max | 48max | 60max | 96max | |
| | START-UP TIME[ms] | 350typ (ACIN 115V, Io=100%) | | | | |
| | HOLD-UP TIME[ms] | 20typ (ACIN 115V, Io=100%) | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 4.50 to 5.50 | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | | |
| OUTPUT VOLTAGE SETTING[V] | 5.00 to 5.15 | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.75 to 7.00 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE SENSING | Not provided | | | | |
| REMOTE ON/OFF | Not provided | | | | | |
| ISOLATION | INPUT-OUTPUT | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT-FG | AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At room temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C, 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, UL508 (Except option -J) Complies with DEN-AN | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR *8 | Complies with IEC61000-3-2 class A | | | | |

SPECIFICATIONS


| | | |
|----------|------------------|--|
| OTHERS | CASE SIZE/WEIGHT | 38 X 80 X 99mm [1.50 X 3.15 X 3.90 inches] (Excluding terminal block and screw) (W X H X D) / 400g max |
| | COOLING METHOD | Convection |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |

- *1 This is the result of measurement of the testing board with capacitors of 22 μF and 0.1 μF placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.
See 1.6 of Instruction Manual for more details.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response.
- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about other classes.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.


Features

- Compact design (Depth: 99mm 3.90inches)
- UL508 approved (Except option -J), and complies with SEMI F47
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

Block diagram

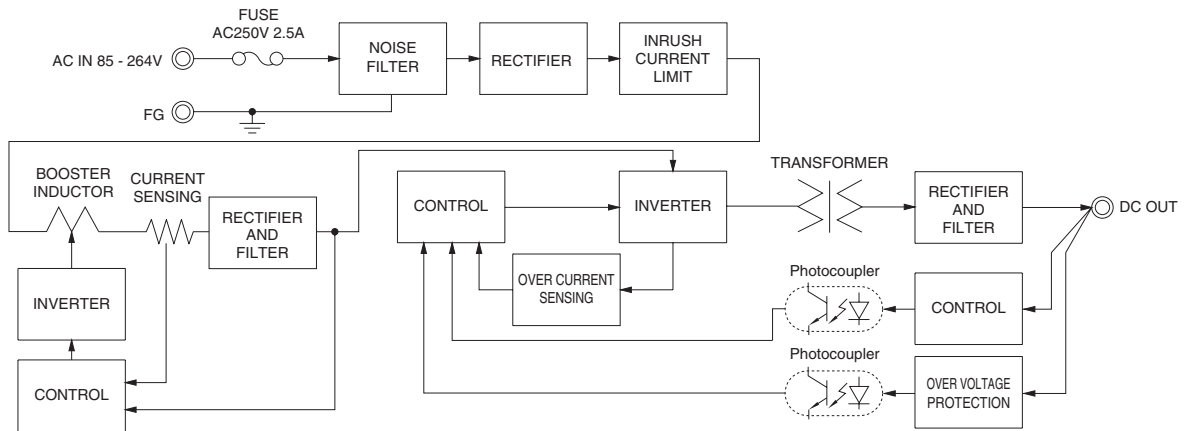


External view

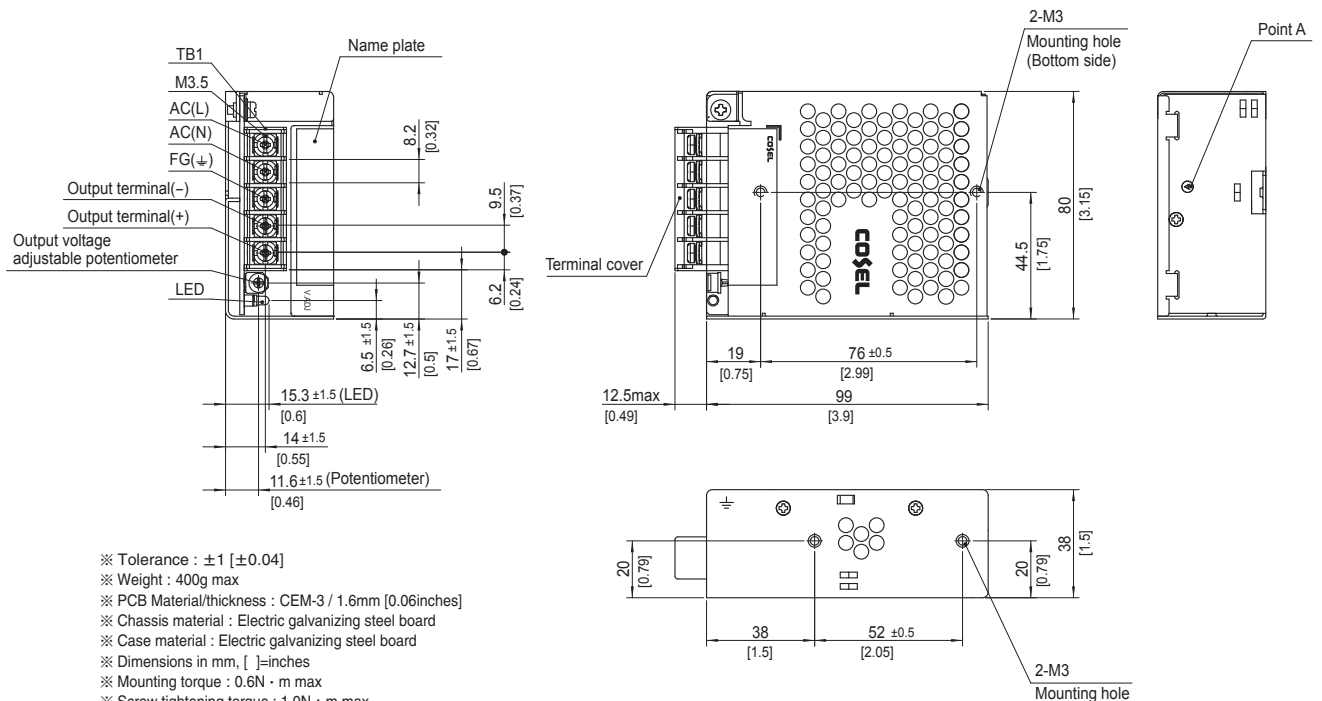

PLA100F

PL A 100 F -□ -□

① ② ③ ④ ⑤ ⑥



Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- R : Remote on/off (Required external power source)
- J : Connector interface
- N : Vertical terminal block
- N□ : with DIN rail

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

* Please consider "PBA100F-5-N" about 5V output with case cover.

| MODEL | | PLA100F-12 | PLA100F-15 | PLA100F-24 | PLA100F-36 | PLA100F-48 |
|------------------------------------|---|--|-----------------|-----------------|-----------------|-----------------|
| VOLTAGE[V] | | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | |
| CURRENT[A] | ACIN 100V | 1.2typ (Io=90%) | | | | |
| | ACIN 115V | 1.1typ (Io=100%) | | | | |
| | ACIN 230V | 0.6typ (Io=100%) | | | | |
| FREQUENCY[Hz] | | 50 / 60 (47 - 63) | | | | |
| EFFICIENCY[%] | ACIN 100V | 82typ (Io=90%) | 83typ (Io=90%) | 85typ (Io=90%) | 86typ (Io=90%) | 86typ (Io=90%) |
| | ACIN 115V | 82typ (Io=100%) | 83typ (Io=100%) | 85typ (Io=100%) | 86typ (Io=100%) | 86typ (Io=100%) |
| | ACIN 230V | 85typ (Io=100%) | 86typ (Io=100%) | 88typ (Io=100%) | 89typ (Io=100%) | 89typ (Io=100%) |
| POWER FACTOR | ACIN 100V | 0.98typ (Io=90%) | | | | |
| | ACIN 115V | 0.98typ (Io=100%) | | | | |
| | ACIN 230V | 0.95typ (Io=100%) * Power factor correction is stopped at AC250V or more. | | | | |
| INRUSH CURRENT[A] | ACIN 100V | 16typ (Io=90%) Ta=25°C at cold start | | | | |
| | ACIN 115V | 16typ (Io=100%) Ta=25°C at cold start | | | | |
| | ACIN 230V | 32typ (Io=100%) Ta=25°C at cold start | | | | |
| LEAKAGE CURRENT[ma] | | 0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | |
| VOLTAGE[V] | | 12 | 15 | 24 | 36 | 48 |
| CURRENT[A] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | |
| | ACIN 115V-264V | 8.4 | 6.7 | 4.3 | 2.8 | 2.1 |
| WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | |
| | ACIN 115V-264V | 100.8 | 100.5 | 103.2 | 100.8 | 100.8 |
| LINE REGULATION[mV] *4 | | 48max | 60max | 96max | 144max | 192max |
| LOAD REGULATION [mV] *4 | Io=30 to 100% | 100max | 120max | 150max | 150max | 300max |
| | Io=0 to 30% | Burst operation (Please contact us about detail) | | | | |
| RIPPLE[mVp-p] *1 | 0 to +40°C | 120max | 120max | 120max | 150max | 150max |
| | -10 to 0°C | 160max | 160max | 160max | 200max | 400max |
| | Io: load factor | 500max | 500max | 500max | 500max | 500max |
| RIPPLE NOISE[mVp-p] *1 | 0 to +40°C | 150max | 150max | 150max | 200max | 200max |
| | -10 to 0°C | 180max | 180max | 180max | 240max | 500max |
| | Io: load factor | 600max | 600max | 600max | 600max | 600max |
| TEMPERATURE REGULATION[mV] | 0 to +40°C | 120max | 150max | 240max | 360max | 480max |
| | -10 to +40°C | 180max | 180max | 290max | 440max | 600max |
| DRIFT[mV] *2 | | 48max | 60max | 96max | 144max | 192max |
| START-UP TIME[ms] | | 500typ (ACIN 115V, Io=100%) Ta=25°C | | | | |
| HOLD-UP TIME[ms] | | 20typ (ACIN 115V, Io=100%) | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | 32.40 to 39.60 | 43.20 to 52.80 |
| OUTPUT VOLTAGE SETTING[V] | | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | 36.00 to 37.44 | 48.00 to 49.92 |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | |
| | OVERVOLTAGE PROTECTION[V] | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 54.00 to 67.20 |
| | OPERATING INDICATION | LED (Green) | | | | |
| | REMOTE SENSING | Not provided | | | | |
| REMOTE ON/OFF | | Optional (Required external power source. Option -R) | | | | |
| ISOLATION | INPUT-OUTPUT • RC *9 | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT • RC-FG *9 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT-RC *9 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, UL508 (Except option -J) Complies with DEN-AN | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR *8 | Complies with IEC61000-3-2 class A | | | | |

SPECIFICATIONS


| | | |
|----------|------------------|---|
| OTHERS | CASE SIZE/WEIGHT | 41 X 97 X 109mm [1.61 X 3.82 X 4.29 inches] (Excluding terminal block and screw) (W X H X D) / 500g max |
| | COOLING METHOD | Convection |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |

- *1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details. When the load factor is 0 - 30%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 30% load or less.
- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about other classes.
- *9 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.

Features


- Compact design (Depth: 109mm 4.29inches)
- High efficiency (88%typ PLA100F-24, AC230Vin, 100% load)
- Low power consumption (1.5W typ AC240Vin, no load at standard model)
- UL508 approved (Except option -J), and complies with SEMI F47 (see instruction manual 1.1)
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

Block diagram

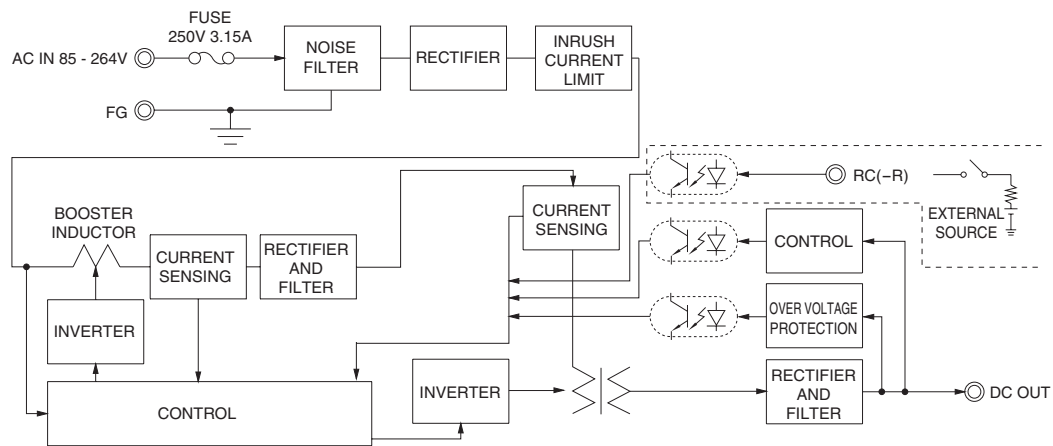

External view

The external size of -R option, -J option, -N1 option and -T option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

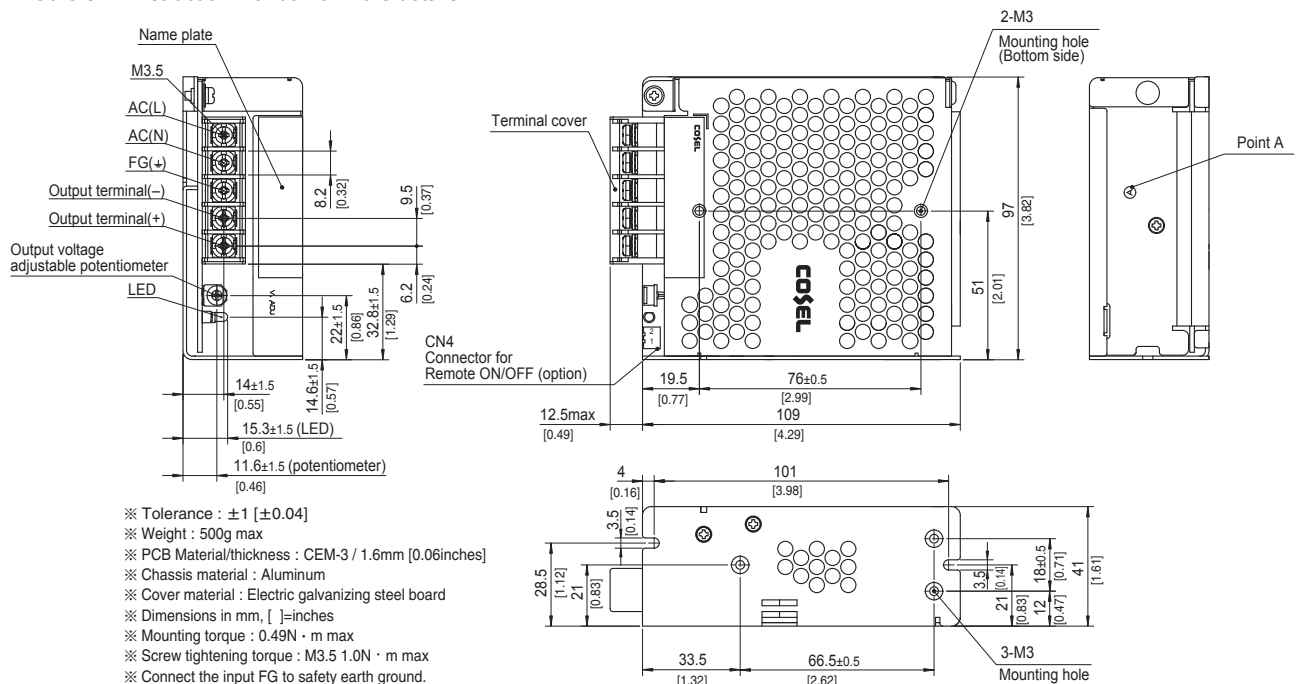

PLA150F

PL A 150 F -□ -□

① ② ③ ④ ⑤ ⑥



Example recommended EMI/EMC filter
NAC-04-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series
* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
C : with Coating
R : Remote on/off
(Required external power source)
J : Connector interface
T : Vertical terminal block
-N□ : with DIN rail

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

* Please consider "PBA150F-5-N" about 5V output with case cover.

| MODEL | | PLA150F-12 | PLA150F-15 | PLA150F-24 | PLA150F-36 | PLA150F-48 |
|------------------------------------|---------------------------------------|--|-----------------|-----------------|-----------------|-----------------|
| VOLTAGE[V] | | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | |
| CURRENT[A] | ACIN 100V | 1.7typ (Io=90%) | | | | |
| | ACIN 115V | 1.6typ (Io=100%) | | | | |
| | ACIN 230V | 0.8typ (Io=100%) | | | | |
| FREQUENCY[Hz] | | 50 / 60 (47 - 63) | | | | |
| EFFICIENCY[%] | ACIN 100V | 84typ (Io=90%) | 84typ (Io=90%) | 87typ (Io=90%) | 87typ (Io=90%) | 87typ (Io=90%) |
| | ACIN 115V | 84typ (Io=100%) | 84typ (Io=100%) | 87typ (Io=100%) | 87typ (Io=100%) | 87typ (Io=100%) |
| | ACIN 230V | 87typ (Io=100%) | 87typ (Io=100%) | 90typ (Io=100%) | 90typ (Io=100%) | 90typ (Io=100%) |
| POWER FACTOR | ACIN 100V | 0.98typ (Io=90%) | | | | |
| | ACIN 115V | 0.98typ (Io=100%) | | | | |
| | ACIN 230V | 0.95typ (Io=100%) * Power factor correction is stopped at AC250V or more. | | | | |
| INRUSH CURRENT[A] | ACIN 100V | 16typ (Io=90%) Ta=25°C at cold start | | | | |
| | ACIN 115V | 16typ (Io=100%) Ta=25°C at cold start | | | | |
| | ACIN 230V | 32typ (Io=100%) Ta=25°C at cold start | | | | |
| LEAKAGE CURRENT[ma] | | 0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | |
| VOLTAGE[V] | | 12 | 15 | 24 | 36 | 48 |
| CURRENT[A] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | |
| | ACIN 115V-264V | 12.5 | 10 | 6.4 | 4.2 | 3.2 |
| WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | |
| | ACIN 115V-264V | 150.0 | 150.0 | 153.6 | 151.2 | 153.6 |
| LINE REGULATION[mV] *4 | | 48max | 60max | 96max | 144max | 192max |
| LOAD REGULATION [mV] *4 | Io=30 to 100% | 100max | 120max | 150max | 150max | 300max |
| | Io=0 to 30% | Burst operation (Please contact us about detail) | | | | |
| RIPPLE[mVp-p] | 0 to +40°C | 120max | 120max | 120max | 150max | 150max |
| | -10 to 0°C | 160max | 160max | 160max | 200max | 400max |
| | Io: load factor | 500max | 500max | 500max | 500max | 500max |
| RIPPLE NOISE[mVp-p] *1 | 0 to +40°C | 150max | 150max | 150max | 200max | 200max |
| | -10 to 0°C | 180max | 180max | 180max | 240max | 500max |
| | Io: load factor | 600max | 600max | 600max | 600max | 600max |
| TEMPERATURE REGULATION[mV] | 0 to +40°C | 120max | 150max | 240max | 360max | 480max |
| | -10 to +40°C | 180max | 180max | 290max | 440max | 600max |
| DRIFT[mV] *2 | | 48max | 60max | 96max | 144max | 192max |
| START-UP TIME[ms] | | 500typ (ACIN 115V, Io=100%) Ta=25°C | | | | |
| HOLD-UP TIME[ms] | | 20typ (ACIN 115V, Io=100%) | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | 32.40 to 39.60 | 43.20 to 52.80 |
| OUTPUT VOLTAGE SETTING[V] | | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | 36.00 to 37.44 | 48.00 to 49.92 |
| OVERCURRENT PROTECTION | | Works over 105% of rating and recovers automatically | | | | |
| OVERVOLTAGE PROTECTION[V] | | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 54.00 to 67.20 |
| OPERATING INDICATION | | LED (Green) | | | | |
| REMOTE SENSING | | Not provided | | | | |
| REMOTE ON/OFF | | Optional (Required external power source. Option -R) | | | | |
| ISOLATION | INPUT-OUTPUT • RC *9 | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT • RC-FG *9 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | |
| | OUTPUT-RC *9 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | |
| ENVIRONMENT | OPERATING TEMP.,HUMID.AND ALTITUDE *5 | -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | |
| | STORAGE TEMP.,HUMID.AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178, UL508 (Except option -J) Complies with DEN-AN | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | |
| | HARMONIC ATTENUATOR *8 | Complies with IEC61000-3-2 class A | | | | |

SPECIFICATIONS


| | | |
|----------|------------------|---|
| OTHERS | CASE SIZE/WEIGHT | 41 X 97 X 129mm [1.61 X 3.82 X 5.08 inches] (Excluding terminal block and screw) (W X H X D) / 600g max |
| | COOLING METHOD | Convection |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |

- *1 This is the result of measurement of the testing board with capacitors of 22 μF and 0.1 μF placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103. See 1.6 of Instruction Manual for more details. When the load factor is 0 - 30%, the switching power loss is reduced by burst operation, which will cause ripple and ripple noise to go beyond the specifications.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response. Measure the output voltage by using the average mode of the tester to deal with the burst operation at 30% load or less.
- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about other classes.
- *9 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.

Features


- Compact design (Depth: 129mm 5.08inches)
- High efficiency (90%typ PLA150F-24, AC230Vin, 100% load)
- Low power consumption (1.5W typ AC240Vin, no load at standard model)
- UL508 approved (Except option -J), and complies with SEMI F47 (see instruction manual 1.1)
- Various connection interface options (vertical terminal [-T], AMP connector [-J])

Block diagram

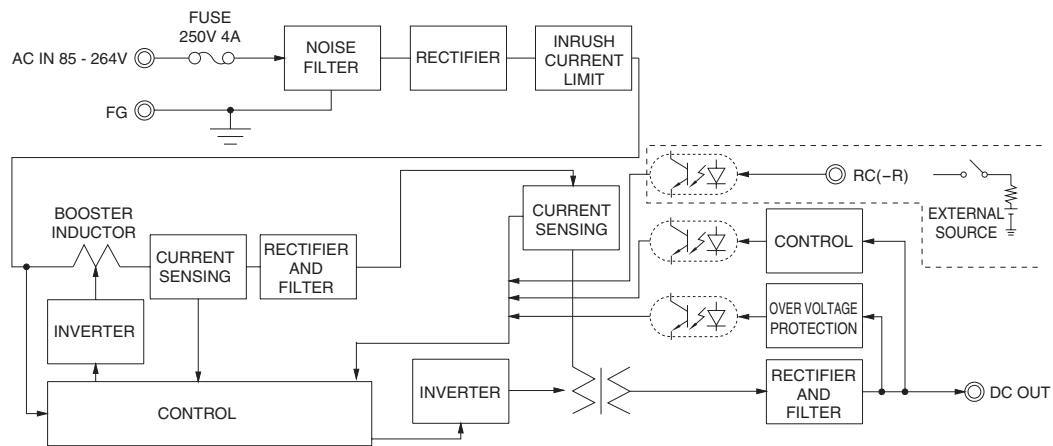



External view

The external size of -R option, -J option, -N1 option and -T option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

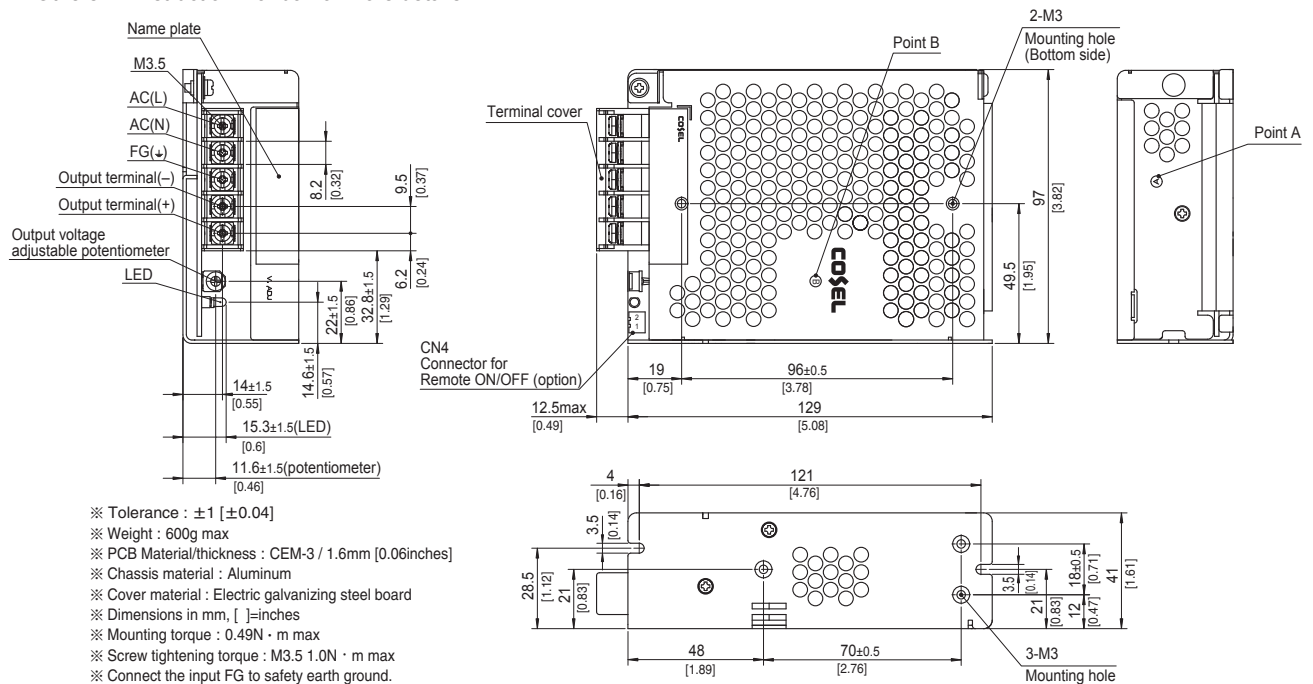

PLA300F

① PL ② A ③ 300 ④ F ⑤ -□ ⑥ -□

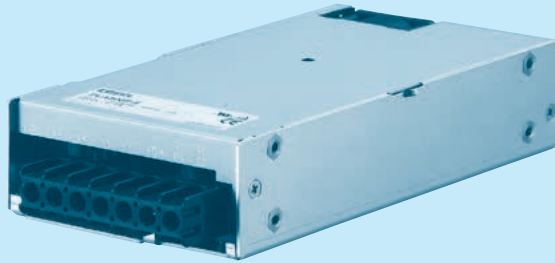

Example recommended EMI/EMC filter
NAC-06-472



High voltage pulse noise type : NAP series
Low leakage current type : NAM series

* A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- G : Low leakage current
- V : External potentiometer for output voltage adjustment
- U : Low input voltage stop (Complies with SEMI F-47)
- R : Remote on/off (Required external power source)
- F4: Low speed fan
- T2: Horizontal terminal block (non-screw-hold type)

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.

SPECIFICATIONS

| | MODEL | PLA300F-5 | PLA300F-12 | PLA300F-15 | PLA300F-24 | PLA300F-36 | PLA300F-48 | |
|------------------------------------|---|--|--|------------------|-----------------|-----------------|-----------------|-----------------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *3 | | | | | | |
| | CURRENT[A] | ACIN 100V | 3.1typ (Io=90%) | 3.4typ (Io=90%) | | | | |
| | | ACIN 115V | 3.0typ (Io=100%) | 3.3typ (Io=100%) | | | | |
| | | ACIN 230V | 1.5typ (Io=100%) | 1.7typ (Io=100%) | | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | | | |
| | EFFICIENCY[%] | ACIN 100V | 73typ (Io=90%) | 78typ (Io=90%) | 79typ (Io=90%) | 81typ (Io=90%) | 81typ (Io=90%) | 82typ (Io=90%) |
| | | ACIN 115V | 74typ (Io=100%) | 78typ (Io=100%) | 80typ (Io=100%) | 82typ (Io=100%) | 82typ (Io=100%) | 83typ (Io=100%) |
| | | ACIN 230V | 77typ (Io=100%) | 81typ (Io=100%) | 83typ (Io=100%) | 86typ (Io=100%) | 86typ (Io=100%) | 86typ (Io=100%) |
| | POWER FACTOR | ACIN 100V | 0.98typ (Io=90%) | | | | | |
| | | ACIN 115V | 0.98typ (Io=100%) | | | | | |
| ACIN 230V | | 0.95typ (Io=100%) | | | | | | |
| INRUSH CURRENT[A] | ACIN 100V | 20typ (Io=90%) Ta=25°C at cold start | | | | | | |
| | ACIN 115V | 20typ (Io=100%) Ta=25°C at cold start | | | | | | |
| | ACIN 230V | 40typ (Io=100%) Ta=25°C at cold start | | | | | | |
| LEAKAGE CURRENT[ma] | 0.75max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | | | | |
| OUTPUT | VOLTAGE[V] | 5 | 12 | 15 | 24 | 36 | 48 | |
| | CURRENT[A] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | | |
| | | ACIN 115V-264V | 50 | 25 | 20 | 12.5 | 8.4 | 6.3 |
| | WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | | |
| | | ACIN 115V-264V | 250 | 300 | 300 | 300 | 302.4 | 302.4 |
| | LINE REGULATION[mV] | *4 | 20max | 48max | 60max | 96max | 144max | 192max |
| | LOAD REGULATION[mV] | *4 | 40max | 100max | 120max | 150max | 150max | 300max |
| | RIPPLE[mVp-p] | 0 to +50°C | 80max | 120max | 120max | 120max | 150max | 150max |
| | | -10 to 0°C | 140max | 160max | 160max | 160max | 160max | 400max |
| | RIPPLE NOISE[mVp-p] | 0 to +50°C | 120max | 150max | 150max | 150max | 200max | 200max |
| | | -10 to 0°C | 160max | 180max | 180max | 180max | 240max | 500max |
| | TEMPERATURE REGULATION[mV] | 0 to +50°C | 50max | 120max | 150max | 240max | 360max | 480max |
| | | -10 to +50°C | 75max | 180max | 180max | 290max | 440max | 600max |
| | DRIFT[mV] | *2 | 20max | 48max | 60max | 96max | 144max | 192max |
| | START-UP TIME[ms] | 300typ (ACIN 115V, Io=100%) | | | | | | |
| HOLD-UP TIME[ms] | 20typ (ACIN 115V, Io=100%) | | | | | | | |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | 4.50 to 5.50 | | 10.80 to 13.20 | | 13.50 to 16.50 | | 21.60 to 26.40 | |
| OUTPUT VOLTAGE SETTING[V] | 5.00 to 5.15 | | 12.00 to 12.48 | | 15.00 to 15.60 | | 24.00 to 24.96 | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | | | |
| | OVERVOLTAGE PROTECTION[V] | 5.75 to 7.00 | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 55.20 to 67.20 | |
| | OPERATING INDICATION | LED (Green) | | | | | | |
| | REMOTE SENSING | Not provided | | | | | | |
| | REMOTE ON/OFF | Optional (Required external power source. Option -R) | | | | | | |
| ISOLATION | INPUT-OUTPUT • RC | *10 AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | | | |
| | INPUT-FG | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | | | |
| | OUTPUT • RC-FG | *10 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | | | |
| | OUTPUT-RC | *10 AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | | | |
| SAFETY AND NOISE REGULATIONS | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | | | |
| | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178 Complies with DEN-AN | | | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | | | |
| | HARMONIC ATTENUATOR *9 | Complies with IEC61000-3-2 class A | | | | | | |

SPECIFICATIONS


| | | |
|----------|------------------|---|
| OTHERS | CASE SIZE/WEIGHT | 102×41×190mm [4.02×1.61×7.48 inches] (Excluding terminal block and screw) (W×H×D) / 1.0kg max |
| | COOLING METHOD | *8 Forced cooling (internal fan) |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |

- *1 This is the result of measurement of the testing board with capacitors of 22 μF and 0.1 μF placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.
See 1.6 of Instruction Manual for more details.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 Output power derating is required. As for DC input, consult us for advice.
- *4 Consult us about dynamic load and input response.
- *5 See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 The fan speed slows down at no load.
- *9 Consult us about other classes.
- *10 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is not possible with this mode.
- * Sound noise may be heard from the power supply when used for pulse load.

Features


- Cost-effective
- Longer life (see Instruction Manual)
- Low profile (meets 1U height = 41 mm or 1.61 inches)
- Wide operating temperature range (-20°C to +70°C see instruction manual)
- Screw hold type terminal block
- Slow fan speed at no load
- Many optional functions
- Complies with SEMI F-47 (-U option, see Instruction Manual for details)

Block diagram

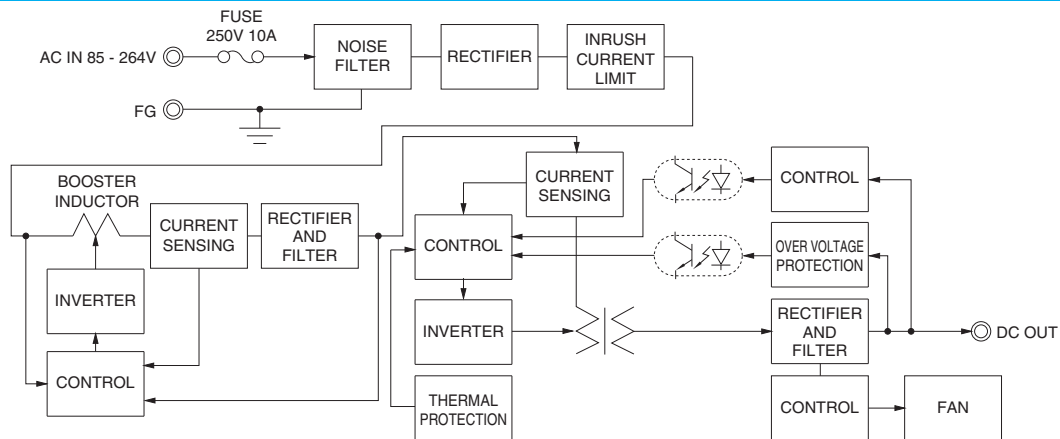

External view



The external size of -V option, -R option, and -T2 option models is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

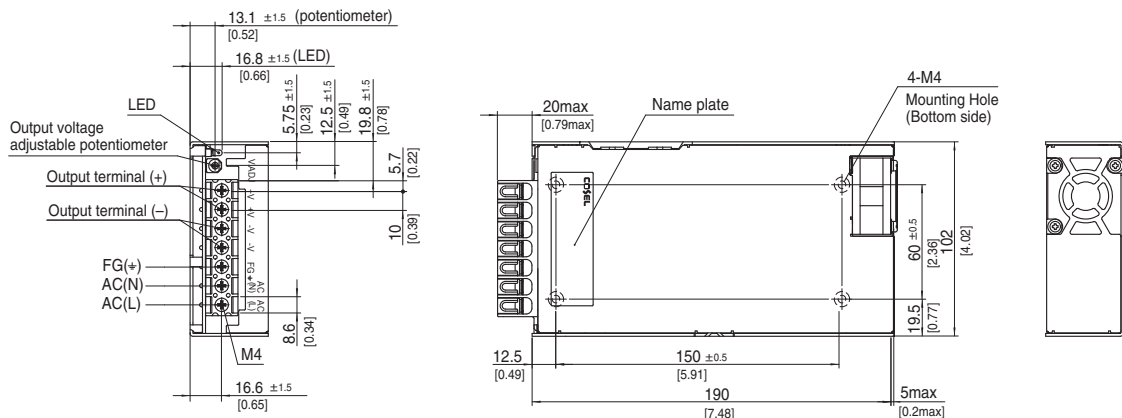

- ※ Tolerance : ±1 [±0.04]
- ※ Weight : 1.0kg max
- ※ PCB Material/thickness : CEM-3 / 1.6mm [0.06inches]
- ※ Chassis material : Aluminum
- ※ Case material : Electric galvanizing steel board
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : 1.2N · m max
- ※ Screw tightening torque : 1.6N · m max
- ※ Connect the input FG to safety earth ground.

PLA600F

PL A 600 F -□ -□
 ① ② ③ ④ ⑤ ⑥

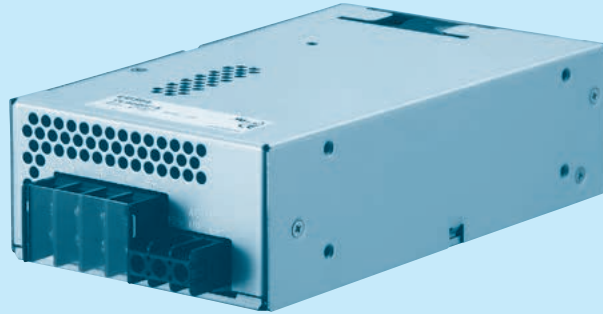

Example recommended EMI/EMC filter
NAC-16-472



High voltage pulse noise type : NAP series
 Low leakage current type : NAM series
 * A higher current rating EMI/EMC filter may be recommended in view of the other devices that could be connected in parallel with the power supply.

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Universal input
- ⑤ Output voltage
- ⑥ Optional *7
- C : with Coating
- G : Low leakage current
- V : External potentiometer for output voltage adjustment
- U : Low input voltage stop (Complies with SEMI F-47)
- W: Parallel operation, LV alarm Remote sensing
- R : Remote on/off (Required external power source)
- F4: Low speed fan
- T2: Horizontal terminal block (non-screw-hold type)

See 5.1 in Instruction Manual.

*Make sure necessary tests will be carried out on your end equipment with the power supply installed in accordance with any required EMC/EMI regulations.
 *Please consider "PLA600F-5" about 5V output.

SPECIFICATIONS

| | MODEL | PLA600F-12 | PLA600F-15 | PLA600F-24 | PLA600F-36 | PLA600F-48 | | |
|-------------------------------|--|--|--|-----------------|-----------------|-----------------|-----------------|--------|
| INPUT | VOLTAGE[V] | AC85 - 264 1 φ (Output derating is required at AC85V - 115V. See 1.1 and 3.2 in Instruction Manual) *4 | | | | | | |
| | CURRENT[A] | ACIN 100V | 6.7typ (Io=90%) | | | | | |
| | | ACIN 115V | 6.5typ (Io=100%) | | | | | |
| | | ACIN 230V | 3.2typ (Io=100%) | | | | | |
| | FREQUENCY[Hz] | 50 / 60 (47 - 63) | | | | | | |
| | EFFICIENCY[%] | ACIN 100V | 81typ (Io=90%) | 81typ (Io=90%) | 84typ (Io=90%) | 85typ (Io=90%) | 85typ (Io=90%) | |
| | | ACIN 115V | 81typ (Io=100%) | 81typ (Io=100%) | 84typ (Io=100%) | 85typ (Io=100%) | 85typ (Io=100%) | |
| | | ACIN 230V | 84typ (Io=100%) | 84typ (Io=100%) | 88typ (Io=100%) | 88typ (Io=100%) | 88typ (Io=100%) | |
| | POWER FACTOR | ACIN 100V | 0.98typ (Io=90%) | | | | | |
| | | ACIN 115V | 0.98typ (Io=100%) | | | | | |
| ACIN 230V | | 0.95typ (Io=100%) | | | | | | |
| INRUSH CURRENT[A] | ACIN 100V | 20/40typ (Io=90%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start) | | | | | | |
| | ACIN 115V | 20/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start) | | | | | | |
| | ACIN 230V | 40/40typ (Io=100%) (Primary inrush current /Secondary inrush current) (More than 3sec to re-start) | | | | | | |
| LEAKAGE CURRENT[ma] | 1.5max (ACIN 115V / 240V, 60Hz, Io=100%, According to IEC60950-1 and DEN-AN) | | | | | | | |
| OUTPUT | VOLTAGE[V] | 12 | 15 | 24 | 36 | 48 | | |
| | CURRENT[A] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | | |
| | | ACIN 115V-264V | 50 | 40 | 25 | 16.7 | 12.5 | |
| | WATTAGE[W] | ACIN 85-115V | Output derating is required at ACIN 115V or less (refer to instruction manual 3.2) | | | | | |
| | | ACIN 115V-264V | 600 | 600 | 600 | 601.2 | 600 | |
| | LINE REGULATION[mV] | *8 | 48max | 60max | 96max | 144max | 192max | |
| | LOAD REGULATION[mV] | *8 | 100max | 120max | 150max | 150max | 300max | |
| | RIPPLE[mVp-p] | *1 | 0 to +50°C | 120max | 120max | 120max | 150max | 150max |
| | | | -20 to 0°C | 160max | 160max | 160max | 160max | 400max |
| | RIPPLE NOISE[mVp-p] | *1 | 0 to +50°C | 150max | 150max | 150max | 200max | 200max |
| | | | -20 to 0°C | 180max | 180max | 180max | 240max | 500max |
| | TEMPERATURE REGULATION[mV] | | 0 to +50°C | 120max | 150max | 240max | 360max | 480max |
| | | | -20 to +50°C | 180max | 180max | 290max | 440max | 600max |
| | DRIFT[mV] | *2 | 48max | 60max | 96max | 144max | 192max | |
| | START-UP TIME[ms] | | 300typ (ACIN 115V, Io=100%) | | | | | |
| | HOLD-UP TIME[ms] | | 20typ (ACIN 115V, Io=100%) | | | | | |
| | OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | | 10.80 to 13.20 | 13.50 to 16.50 | 21.60 to 26.40 | 32.40 to 39.60 | 43.20 to 52.80 | |
| OUTPUT VOLTAGE SETTING[V] | | 12.00 to 12.48 | 15.00 to 15.60 | 24.00 to 24.96 | 36.00 to 37.44 | 48.00 to 49.92 | | |
| PROTECTION CIRCUIT AND OTHERS | OVERCURRENT PROTECTION | Works over 105% of rating and recovers automatically | | | | | | |
| | OVERVOLTAGE PROTECTION[V] | 13.80 to 16.80 | 17.25 to 21.00 | 27.60 to 33.60 | 41.40 to 50.40 | 55.20 to 67.20 | | |
| | OPERATING INDICATION | LED (Green) | | | | | | |
| | REMOTE SENSING | Optional (Option -W) | | | | | | |
| REMOTE ON/OFF | Optional (Required external power source. Option -R) | | | | | | | |
| ISOLATION | INPUT-OUTPUT • RC | *3 | AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | | |
| | INPUT-FG | | AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At room temperature) | | | | | |
| | OUTPUT • RC-FG | *3 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | | |
| | OUTPUT-RC | *3 | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At room temperature) | | | | | |
| ENVIRONMENT | OPERATING TEMP., HUMID. AND ALTITUDE *5 | -20 to +70°C (Output derating is required), 20 - 90%RH (Non condensing), 3,000m (10,000 feet) max | | | | | | |
| | STORAGE TEMP., HUMID. AND ALTITUDE | -20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000 feet) max | | | | | | |
| | VIBRATION | 10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axes | | | | | | |
| | IMPACT | 196.1m/s ² (20G), 11ms, once each X, Y and Z axes | | | | | | |
| SAFETY AND NOISE REGULATIONS | AGENCY APPROVALS | UL60950-1, C-UL (CSA60950-1), EN60950-1, EN50178 Complies with DEN-AN | | | | | | |
| | CONDUCTED NOISE | Complies with FCC-B, VCCI-B, CISPR22-B, EN55011-B, EN55022-B | | | | | | |
| | HARMONIC ATTENUATOR *10 | Complies with IEC61000-3-2 class A | | | | | | |

SPECIFICATIONS


| | | |
|----------|------------------|---|
| OTHERS | CASE SIZE/WEIGHT | 120×61×215mm [4.72×2.40×8.46 inches] (Excluding terminal block and screw) (W×H×D) / 2.0kg max |
| | COOLING METHOD | *9 Forced cooling (internal fan) |
| WARRANTY | WARRANTY | *6 5 years (subject to the operating conditions) |

- *1 This is the result of measurement of the testing board with capacitors of 22 μ F and 0.1 μ F placed at 150 mm from the output terminals by a 20 MHz oscilloscope or a ripple-noise meter equivalent to Keisoku-Giken RM103.
See 1.6 of Instruction Manual for more details.
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C.
- *3 The RC terminal is added to option -R models. The RC terminal is isolated from input, output, and FG.
- *4 As for DC input, consult us for advice.
- *5 Output power derating is required. See 3.2 in Instruction Manual.
- *6 See 3.3 in Instruction Manual for more details.
- *7 Consult us about safety agency approvals for the models with optional functions.
- *8 Consult us about dynamic load and input response.
- *9 The fan speed slows down at no load.
- *10 Consult us about other classes.
- * Do not use the power supply in overcurrent conditions or in unspecified input voltage ranges. Otherwise the internal components may be damaged.
- * Parallel operation is allowed for PLA600F models with the -W option only.
- * Sound noise may be heard from the power supply when used for pulse load.

Features


- Cost-effective
- Longer life (see Instruction Manual)
- Low profile (meets 2U height = 61 mm or 2.40 inches)
- Wide operating temperature range (-20°C to +70°C see instruction manual)
- Screw hold type terminal block
- Slow fan speed at no load
- Many optional functions
- Complies with SEMI F-47 (-U option, see Instruction Manual for details)

Block diagram

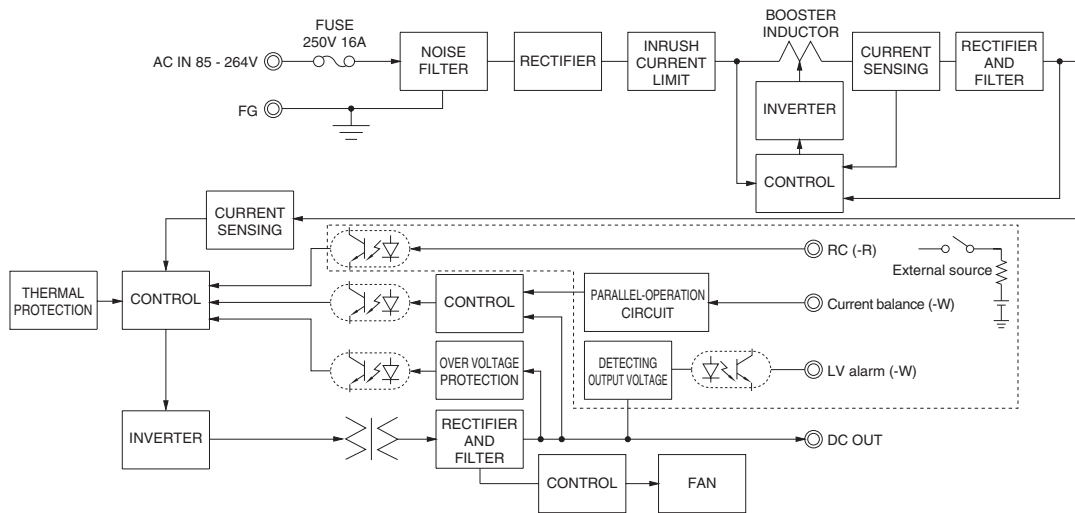

External view

The external size of -V option, -W option, -R option, and -T2 option is different from the standard model. See "5. Options and Others" in Instruction Manual for more details.

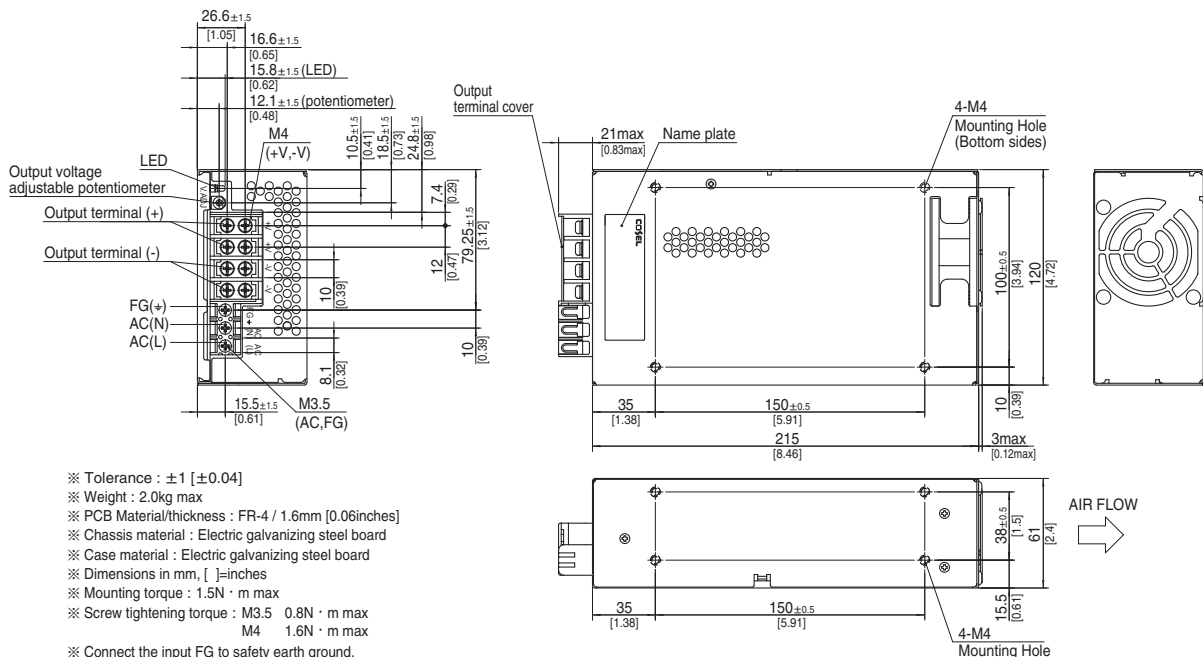

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Switching Power Supplies](#) category:

Click to view products by [Cosel](#) manufacturer:

Other Similar products are found below :

[70841011](#) [73-551-0005](#) [73-551-0048](#) [PS3E-B12F](#) [PS3E-E12F](#) [AAD600S-4-OP](#) [R22095](#) [KD0204](#) [9021](#) [LDIN100150](#) [LPM000-BBAR-01](#)
[LPX17S-C](#) [EVS57-10R6/R](#) [FP80](#) [FRV7000G](#) [22929](#) [PS3E-F12F](#) [CQM1IA121](#) [40370121900](#) [VI-PU22-EXX](#) [40370121910](#) [LDIN5075](#)
[LPM615-CHAS](#) [LPX140-C](#) [09-160CFG](#) [70841025](#) [VPX3000-CBL-DC](#) [VI-LUL-IU](#) [LPM000-BBAR-05](#) [LPM000-BBAR-08](#) [LPM124-](#)
[OUTA1-48](#) [LPM000-BBAR-07](#) [LPM109-OUTA1-10](#) [LPM616-CHAS](#) [08-30466-1055G](#) [08-30466-2175G](#) [08-30466-2125G](#) [DMB-EWG](#)
[TVQF-1219-18S](#) [6504-226-2101](#) [CQM1IPS01](#) [SP-300-5](#) [CQM1-IPS02](#) [VI-MUL-ES](#) [22829](#) [08-30466-0065G](#) [VI-RU031-EWWX](#) [08-30466-](#)
[0028G](#) [EP3000AC48INZ](#) [VP-C2104853](#)