

30 and 40 W - 50 Nm - Planetary Ø 62 mm 801496 SNI10 Part number Contact us



With or without integrated control electronics

- Output in motor shaft
- Ideal for high reduction ratios
- Ideal for high-torque applications
- Excellent efficiency
- Reversible movement

Part numbers

	Type	With built-in electronic control	Without built-in control, with Hall effect sensors	Number of stages	Ratios (i)	Output speed (rpm) 24 V DC	Available torque (Nm)
80149606	801496 SNI10	SNI10	-	3	307,5	7	30

Specifications


General characteristics

Motor	801400
Nominal motor power at 24 V (W)	30 W
Axial load dynamic (N)	100
Radial load dynamic (N)	50 / 70* / 120**
Efficiency (%)	90 / 80* / 70**
Gearbox case temperature rise (°C)	35
Weight (g)	1600 / 1900* / 2200**
Protection index	IP54

Comments

Dimensions (mm)

801496 with SNI10

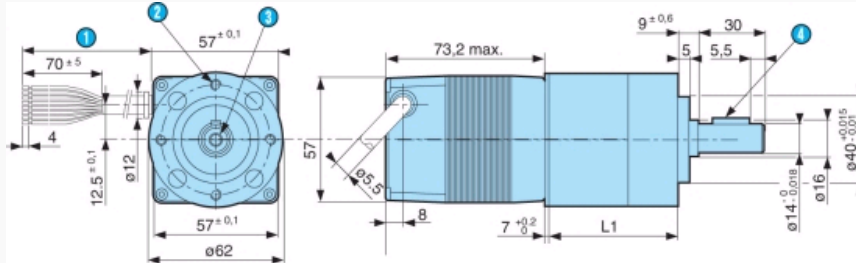

N°	Legend
①	Length of cable 400 ± 10 mm
②	4 holes M5 depth 10 at 90° over Ø 52
③	Fixing hole M5, depth 12.5
④	Key A5 x 5 x 18 DIN 6885 A
	L1 1 stage : 45.7 mm max.
	L1 2 stages : 61.5 mm max.
	L1 3 stages : 77.4 mm max.

Precautions for use

The limits and precautions for use described in the 30 W brushless motor section must be observed.

Product adaptations



- With integrated electronic controls SNI10 or TNI20
- No lead output but connector in motor
- Dimensions of gearbox shaft
- Cable length, with or without connector
- Open-loop control in 2 quadrants
- Low-noise version
- Other windings
- Other reduction ratios
- Mechanical holding brake

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [AC, DC & Servo Motors](#) category:

Click to view products by [Crouzet](#) manufacturer:

Other Similar products are found below :

[79207644](#) [805470B40040MY](#) [80807028](#) [808070Y01125Z](#) [808550Y00049Z](#) [823055C10001MWY](#) [82520405](#) [82664024](#) [82802504](#)
[R88MK10030H](#) [M4E068-EC03-01](#) [M4E068-CF01-01](#) [79265119](#) [80510503](#) [805470A40040MY](#) [805470B40020MY](#) [80627003](#)
[808070Y00250Y](#) [808070Y83.33Y](#) [823055A20001MW](#) [825140A40010MP](#) [825290C43.75MX](#) [82714023](#) [82800003](#) [82830009](#) [82810017](#)
[R88M-K90010F-S2](#) [89830012](#) [82840003](#) [82840004](#) [82869011](#) [82524021](#) [82862202](#) [82869006](#) [82861013](#) [80803009](#) [80547015](#) [82862205](#)
[R88M-K40030T-B](#) [80527006](#) [82330514](#) [81021118](#) [82524004](#) [89800008](#) [82867009](#) [82662564](#) [82662515](#) [82600041](#) [82524008](#) [82524006](#)