



CRYSTEK
MICROWAVE
 A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ
 LOW LOSS RF COAX
 CABLE ASSEMBLIES
 WITH STAINLESS STEEL
 CONNECTORS**



Armored 50 Ohm 18 GHz Low Loss Coaxial Cables

Features:



- Strain Relief:** Heavy duty adhesive strain relief with Neoprene jacket
- Center Conductor:** SPCCS (Silver-Plated Copper Solid)
- First Shield:** Silver-plated flat braid
- Second Shield:** High temp. aluminum polyimide foil
- Third Shield:** Round silver-plated copper braid
- Dielectric:** Expanded PTFE (Polytetrafluoroethylene)
- Cable Jacket:** ETFE (Ethylene Tetrafluoroethylene Copolymer)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Armor Outer Diameter:** 0.355" (9.02mm) Max
- Armor:** Type 302 Stainless Steel, Fully Interlocking
- Operating Temperature:** -40°C to +85°C
- Minimum Bend Radius:** 1.5"
- Crush Resistance:** Compress OD by 0.003" 1930 lbs. using 3" plate

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** Up to 18 GHz
- Insertion Loss:** <0.41 dB/ft Typ at 18 GHz
- VSWR:** <1.3 to 18 GHz
- Nominal Capacitance:** 27 pF/ft
- Velocity of Propagation:** 78%
- Shield Effectiveness:** Greater than 90 dB
- Attenuation (dB/ft):** 0.05 Typical at 400 MHz
 0.08 Typical at 1 GHz
 0.11 Typical at 2 GHz
 0.14 Typical at 3 GHz
 0.21 Typical at 6 GHz
 0.32 Typical at 12 GHz
 0.41 Typical at 18 GHz

- Max Power in (Watts):** 2800 @ 500 MHz
 1960 @ 1 GHz
 1100 @ 3 GHz
 760 @ 6 GHz
 520 @ 12 GHz
 370 @ 18 GHz

*as specified at 25°C

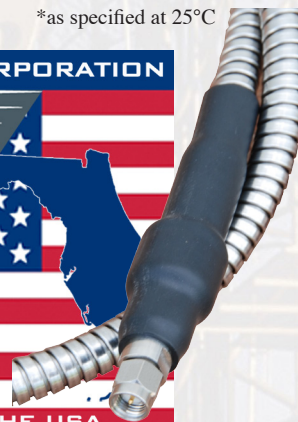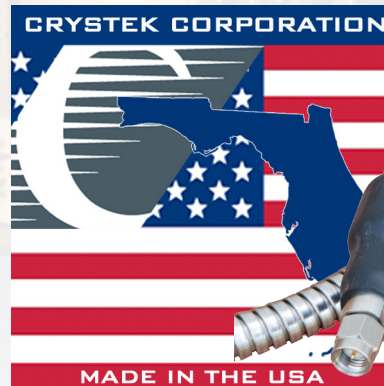

Custom Lengths Available

Available Connector Terminations:

- SMA Male
- Type N Bulkhead Female
- TNC Male
- TNC Bulkhead Female

Connector Corrosion (salt spray):

MIL-STD-202, method 101, test cond. B 5% salt solution.

Connector Durability:

500 connections Minimum

Note** Cable is weather resistant with continuous neoprene jacket cover over armor.

SMA / SMA [Straight/Straight]

Part Number	Description	Length
CCASMA-MM-LL142-24	Armored LL142 Low Loss Coax Cable, SMA Male/Male	24"
CCASMA-MM-LL142-36	Armored LL142 Low Loss Coax Cable, SMA Male/Male	36"
CCASMA-MM-LL142-48	Armored LL142 Low Loss Coax Cable, SMA Male/Male	48"
CCASMA-MM-LL142-60	Armored LL142 Low Loss Coax Cable, SMA Male/Male	60"





CRYSTEK
 CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
 PHONE: 239-561-3311 • 800-237-3061 Rev.: C
 FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ
LOW LOSS RF COAX
CABLE ASSEMBLIES
WITH STAINLESS STEEL
CONNECTORS**

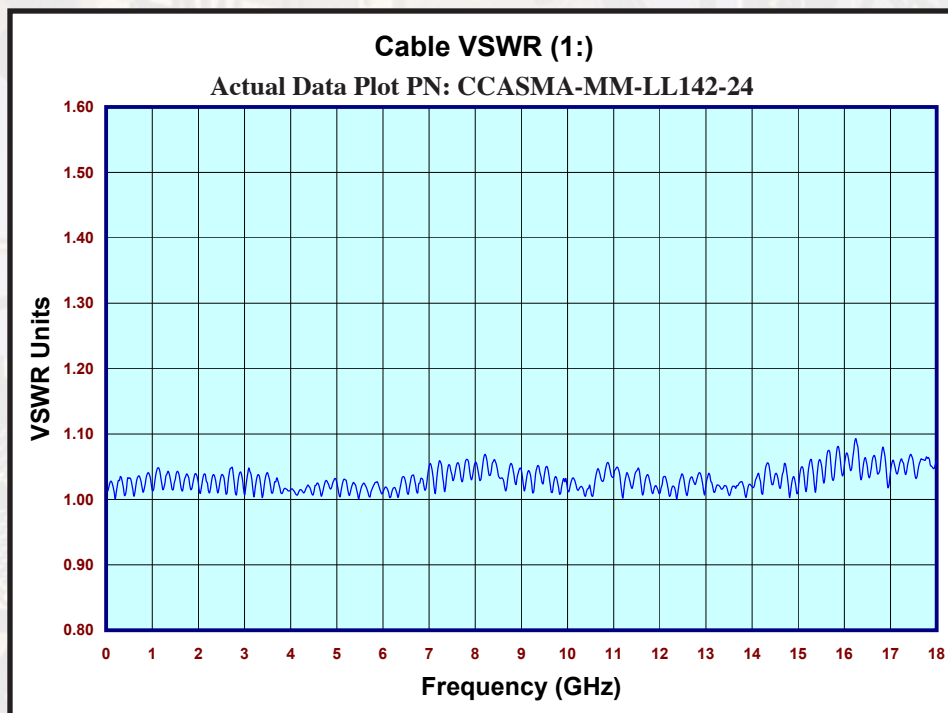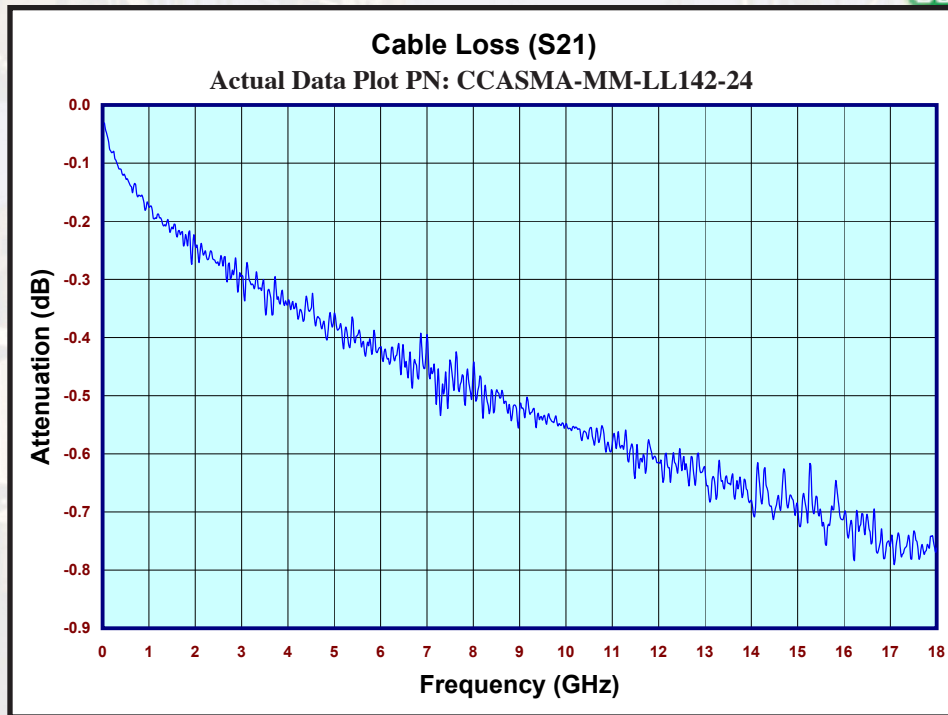



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ
LOW LOSS RF COAX
CABLE ASSEMBLIES
WITH STAINLESS STEEL
CONNECTORS**

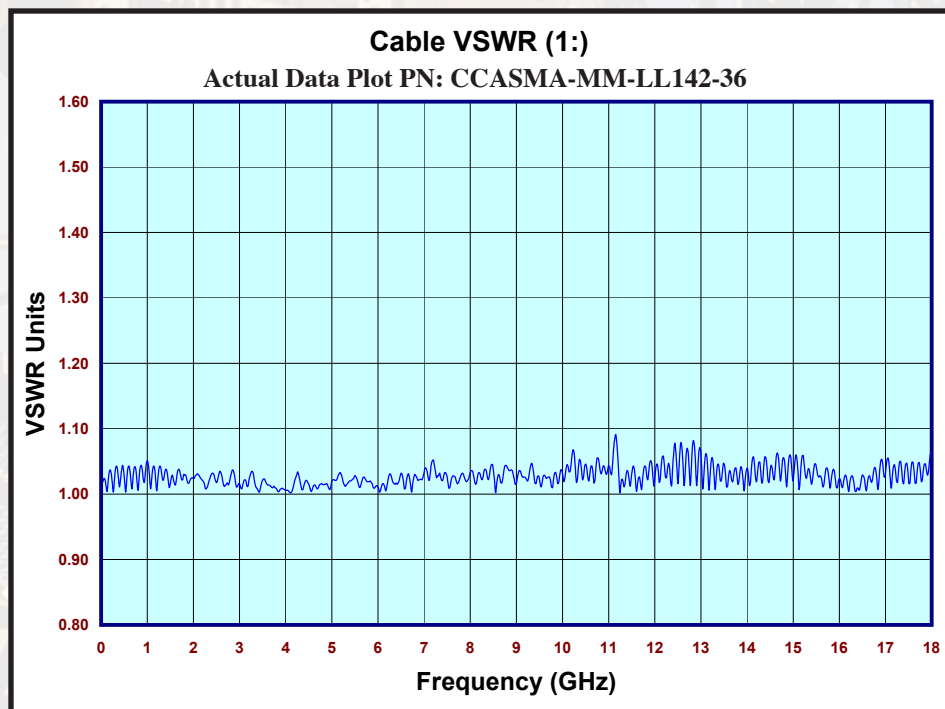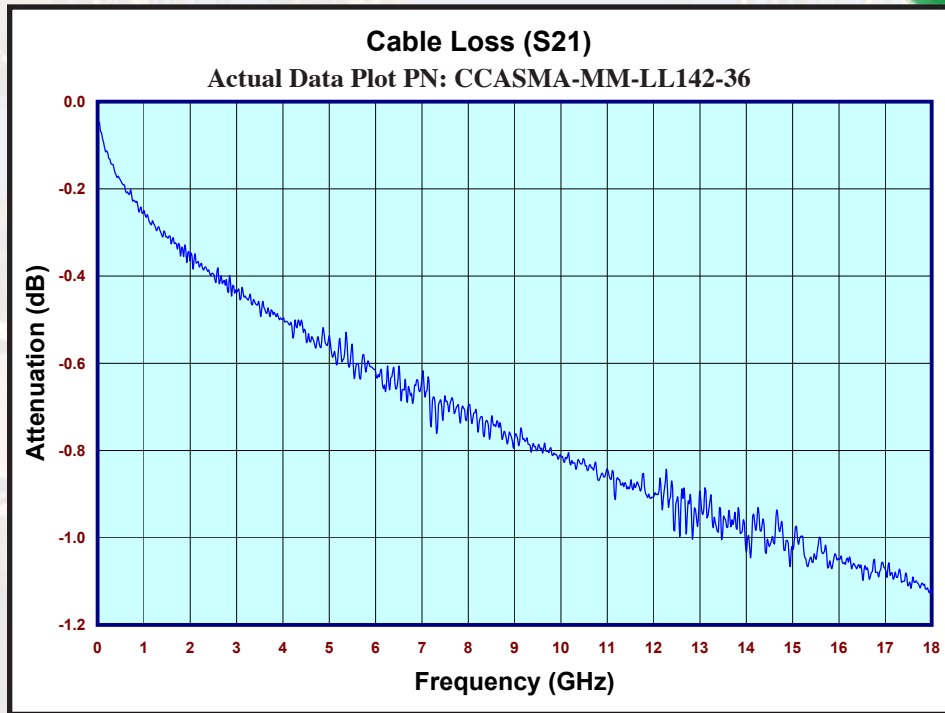



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**ARMORED 18 GHZ
LOW LOSS RF COAX
CABLE ASSEMBLIES
WITH STAINLESS STEEL
CONNECTORS**

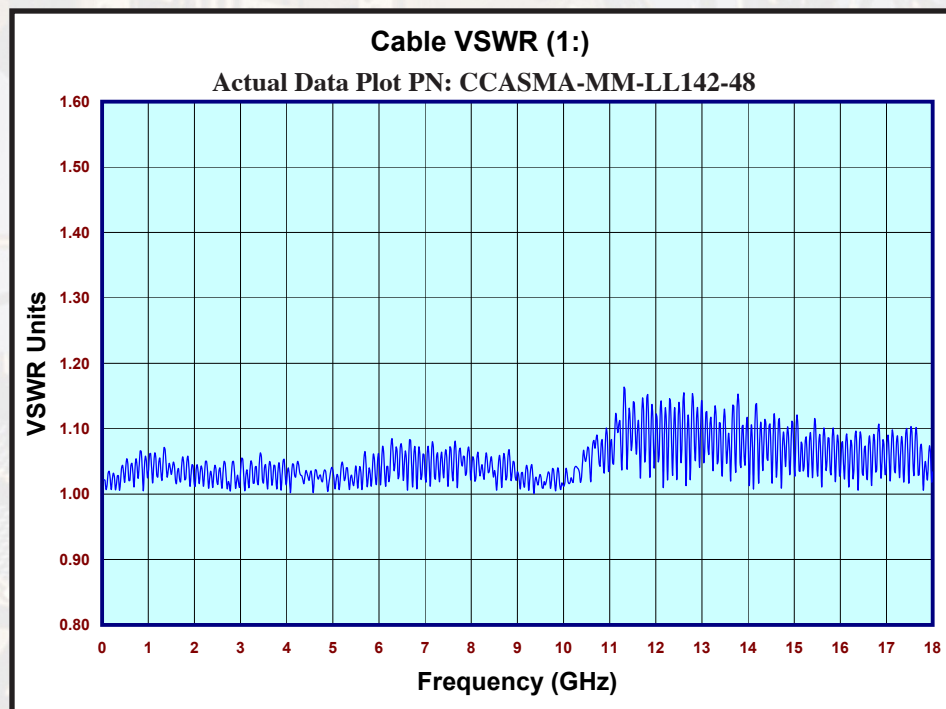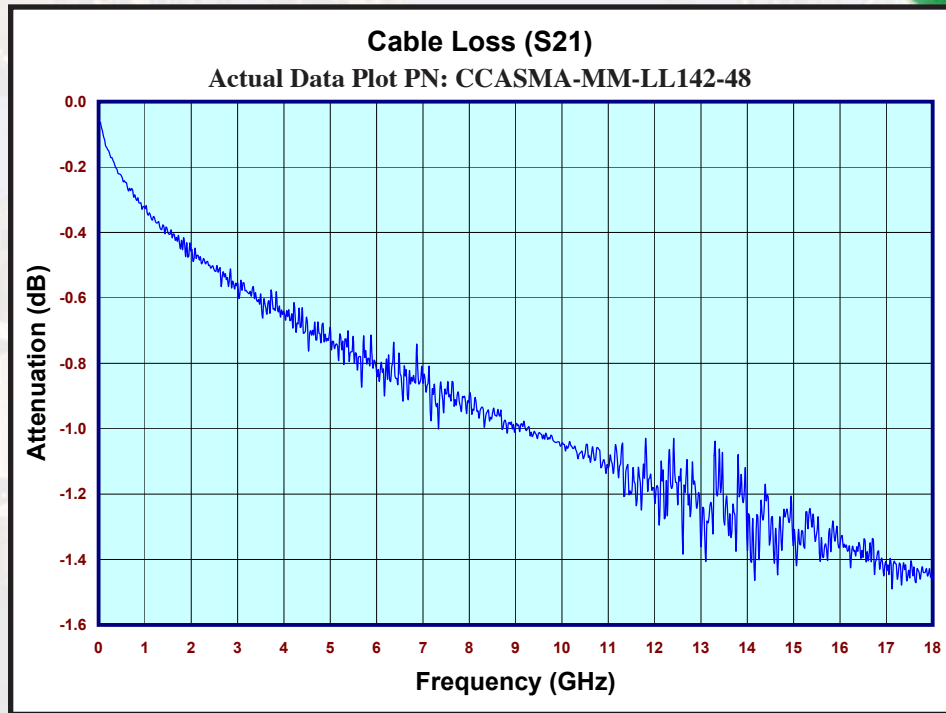

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: C
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)