



CRYSTEK

MICROWAVE

A DIVISION OF CRYSTEK CORPORATION

18 GHZ LOW LOSS RF COAX CABLE ASSEMBLIES WITH STAINLESS STEEL CONNECTORS



LL335 50 Ohm 18 GHz Low Loss Coaxial Cables

Features:

- Strain Relief:** Heavy duty adhesive strain relief with Neoprene jacket
- Center Conductor:** Solid silver-plated copper
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** Round silver-plated copper braid
- Dielectric:** Expanded PTFE (Polytetrafluoroethylene) tape
- Jacket:** FEP (Fluorinated ethylene propylene)
- Cable Outer Diameter:** 0.293" (7.44mm)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Jacket Color:** Grey
- Operating Temperature:** -45°C to +85°C
- Minimum Bend Radius:** 1.5"



Custom Lengths Available

Available Connector Terminations:

- SMA Male
- Type N Male
- Type N Bulkhead Female
- Type N Male Right Angle
- TNC Male



Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** Up to 18 GHz
- Insertion Loss:** <0.22 dB/ft at 18GHz
- VSWR:** 1:1.3 Typical
1:1.4 Max
- Nominal Capacitance:** 24 pF/ft
- Velocity of Propagation:** 85%
- Shield Effectiveness:** Greater than 100 dB
- Attenuation (dB/ft):** 0.03 Typical @ 500 MHz
*connector loss not included 0.045 Typical @ 1 GHz
0.08 Typical @ 3 GHz
0.11 Typical @ 6 GHz
0.16 Typical @ 12 GHz
0.20 Typical @ 18 GHz
- Avg Power in (Kwatts):** 7.90 @ 500 MHz
*Rating of Actual Cable only 5.47 @ 1 GHz
*specified at 25°C/Sea Level 3.00 @ 3 GHz
2.02 @ 6 GHz
1.33 @ 12 GHz
1.04 @ 18 GHz

Connector Corrosion (salt spray):

MIL-STD-202, method 101, test cond. B 5% salt solution.

Connector Durability:

500 connections Minimum

Part Number	Description	Length
CCSMA-MM-LL335-36	LL335 Low Loss Coax Cable, SMA Male/Male, Straight/Straight	36"
CCSMA-MM-LL335-48	LL335 Low Loss Coax Cable, SMA Male/Male, Straight/Straight	48"
CCSMA-MM-LL335-60	LL335 Low Loss Coax Cable, SMA Male/Male, Straight/Straight	60"
CCN-MM-LL335-36	LL335 Low Loss Coax Cable, N-Type Male/Male, Straight/Straight	36"
CCN-MM-LL335-48	LL335 Low Loss Coax Cable, N-Type Male/Male, Straight/Straight	48"
CCN-MM-LL335-60	LL335 Low Loss Coax Cable, N-Type Male/Male, Straight/Straight	60"



CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913



PHONE: 239-561-3311 • 800-237-3061 Rev.: 1

FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 09-07-17



CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**18 GHZ LOW LOSS RF
COAX CABLE ASSEMBLIES
WITH STAINLESS STEEL
CONNECTORS**

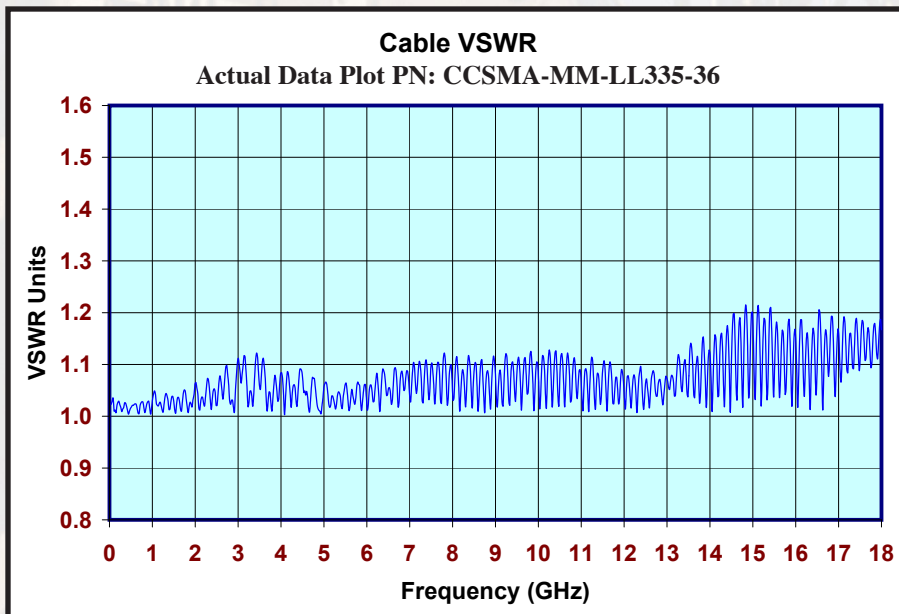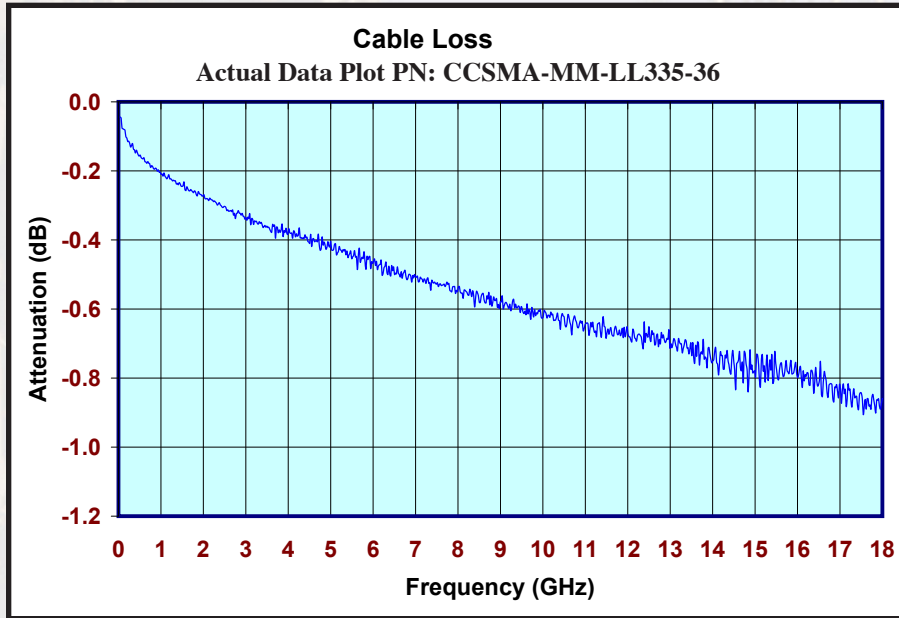

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061 Rev.: 1
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 09-07-17

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [R285001001](#) [R288940004](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#)
[24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-](#)
[003](#) [25P203C25P2-003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-](#)
[48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#)
[TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#)
[R285020301W](#) [PCX-18-50](#) [Minibend-9](#) [Minibend-4](#) [BNC TO SMA Cable](#) [MIKROE-274](#)