



CRYSTEK MICROWAVE

A DIVISION OF CRYSTEK CORPORATION

FLEXIBLE .086 PRECISION 18 GHZ RF COAX CABLE ASSEMBLIES



086 Flexible 50 Ohm 18 GHz Coaxial Cables

Features:

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** SCCS (Silver-Plated Copper Clad Steel)
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** PTFE (Polytetrafluoroethylene)
- Jacket:** FEP (Fluorinated Ethylene Propylene)
- Cable Outer Diameter:** 0.100" (2.54mm)
- Connectors:** Gold-plated brass
- Center Pin:** Gold-plated brass
- Jacket Color:** Blue
- Operating Temperature:** -45°C to +85°C

Static Bend Radius: 0.3" Min.

Available Connector Terminations:

- SMA Male
- SMA Female
- SMA Male Right Angle (Refer to 086F_RA)



*Custom Lengths Available
Phase Matching Available*

Electrical Specifications:

- Impedance:** 50 Ohms
- Frequency:** Up to 18 GHz
- Insertion Loss:** 1.06 dB/ft Typ at 18 GHz
- VSWR:** <1.3 to 18 GHz
- Nominal Capacitance:** 31 pF/ft
- Velocity of Propagation:** 70%
- Shield Effectiveness:** Greater than 100 dB
- Min. Breakdown Volt.** 4.3 kV
- Attenuation (dB/ft):** 0.15 Typical at 500 MHz
0.21 Typical at 1 GHz
0.38 Typical at 3 GHz
0.56 Typical at 6 GHz
0.83 Typical at 12 GHz
1.06 Typical at 18 GHz

- Max Power in (Kwatts):** 0.18 @ 500 MHz
0.13 @ 1 GHz
0.08 @ 3 GHz
0.05 @ 6 GHz
0.04 @ 12 GHz
0.03 @ 18 GHz

*as specified at 25°C/sea level

*connector loss not included



SMA Male [Straight] / SMA Male [Straight]

Part Number	Description	Length
CCSMA18-MM-086F-12	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	12"
CCSMA18-MM-086F-24	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	24"
CCSMA18-MM-086F-36	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	36"
CCSMA18-MM-086F-48	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	48"
CCSMA18-MM-086F-60	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	60"
CCSMA18-MM-086F-72	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	72"
CCSMA18-MM-086F-120	.086 Flexible RF Coax Cable, SMA Male/Male, Straight/Straight	120"



**CRYSTEK
CORPORATION**

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: F
Date: 02-22-17




CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**FLEXIBLE .086 PRECISION
18 GHZ RF COAX CABLE
ASSEMBLIES**




S11

Actual Data Plot PN: CCSMA18-MM-086F-24

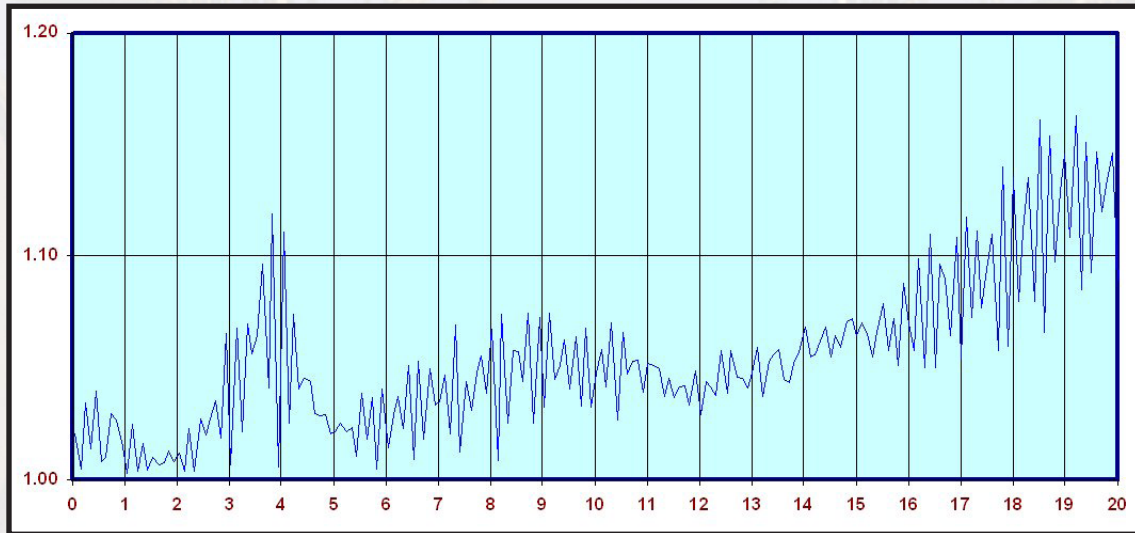

S12

Actual Data Plot PN: CCSMA18-MM-086F-24

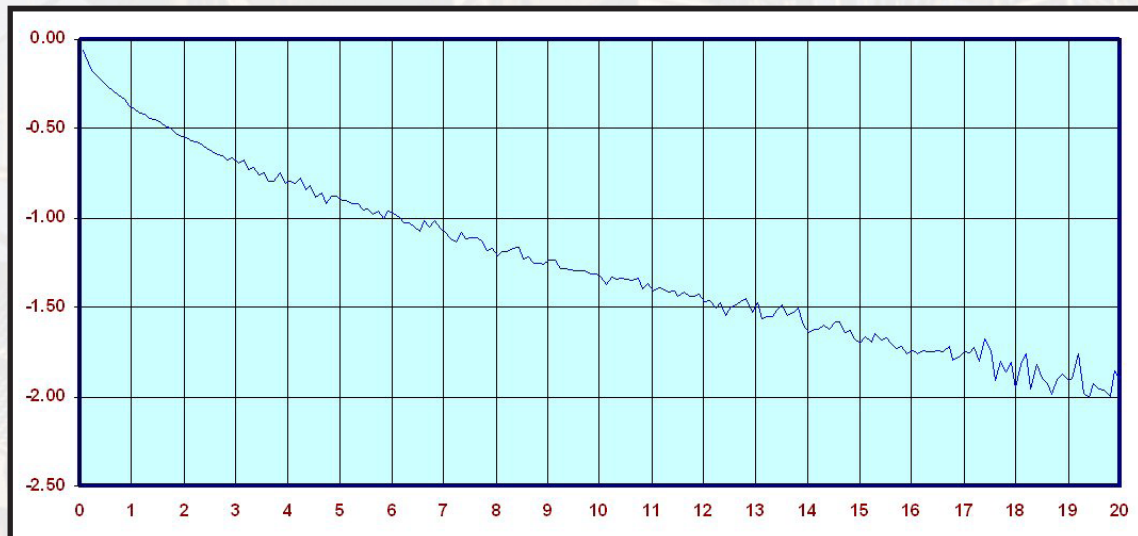

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: F
Date: 02-22-17




CRYSTEK
MICROWAVE
A DIVISION OF CRYSTEK CORPORATION

**FLEXIBLE .086 PRECISION
18 GHZ RF COAX CABLE
ASSEMBLIES**




S21

Actual Data Plot PN: CCSMA18-MM-086F-24

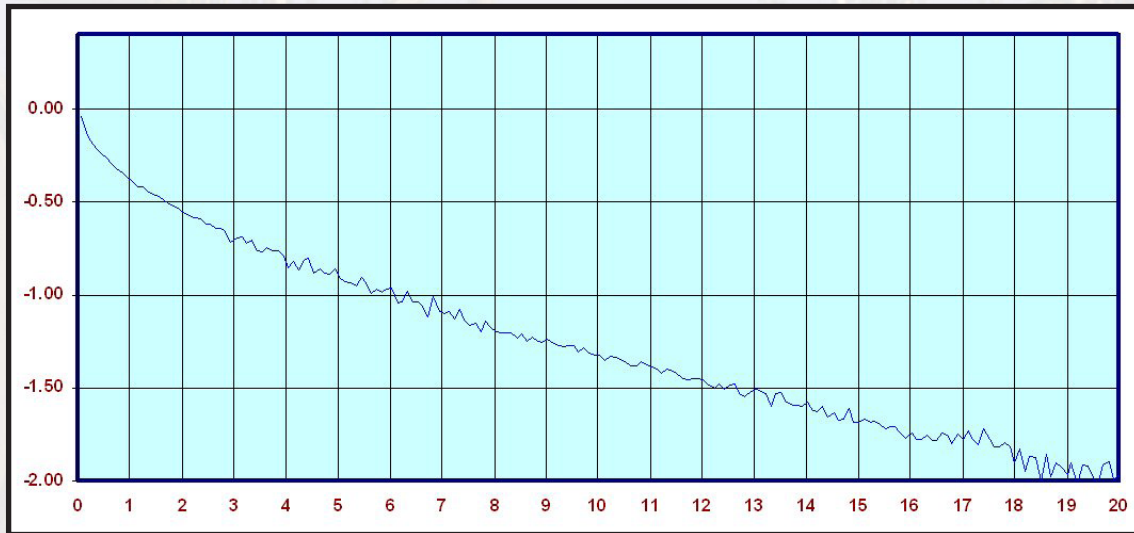

S22

Actual Data Plot PN: CCSMA18-MM-086F-24

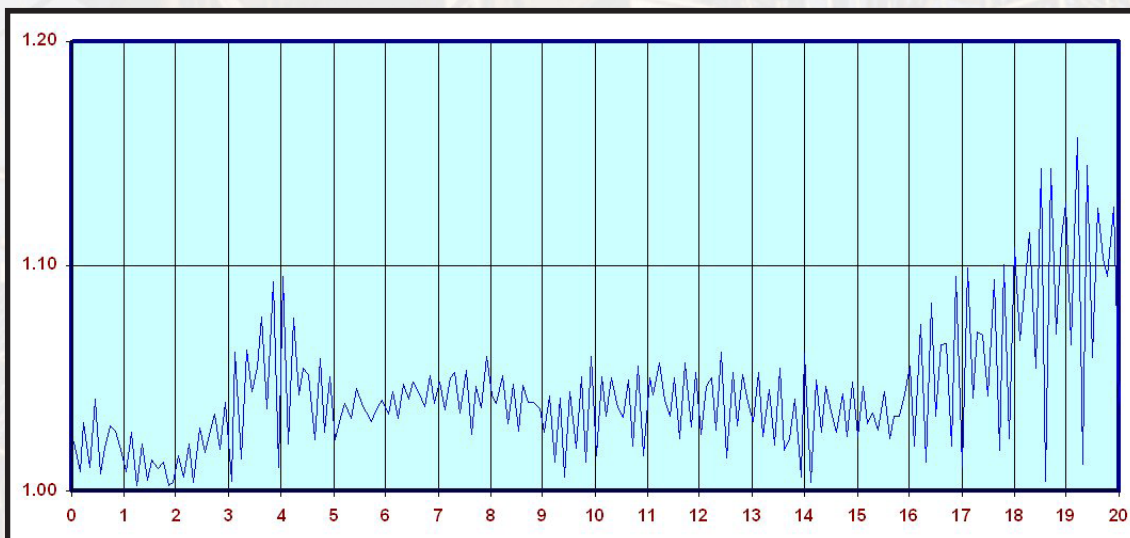

CRYSTEK
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913
PHONE: 239-561-3311 • 800-237-3061
FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: F
Date: 02-22-17

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Crystek](#) manufacturer:

Other Similar products are found below :

[573/2](#) [73-6311-6](#) [73-6353-3](#) [73-6364-6](#) [MDB1-9SH001](#) [MDM-15PH003L-K139](#) [MDM-21PH003L-K139](#) [MIQ6-7SH076](#) [R288940005](#)
[RMTB1-6PHY0102](#) [145111-05-12.00](#) [2192](#) [CA-628485-A43](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P203C24P2-006](#)
[24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-](#)
[003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [RMTB1-15PHY0102](#) [RMTB1-](#)
[8PHY0102](#) [4814-BB-24](#) [500-181-R-ACC](#) [5260-72](#) [314-120](#) [JR4N1-CL1-6F](#) [JR4R3-CL1-4F](#) [JT2N1-CL1-1F](#) [JT2T1-CL1-6F](#) [4814-K-48](#)
[RN-UFL-SMA6](#) [100E151JW3600X](#) [CCNTN2-MM-LL335-26](#) [73-6310-50](#) [73-6351-25](#) [73-6353-25](#) [73-6361-25](#)