



**CRYSTEK**  
**MICROWAVE**  
 A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
 COAX CABLE ASSEMBLIES  
 2.92mm(K) AND SMA  
 STAINLESS STEEL  
 CONNECTORS**



**26.5 GHz Low Loss Coaxial Cables**

**Features:**

- Strain Relief:** Heavy duty adhesive strain relief
- Center Conductor:** Silver-plated solid copper
- Inner Braid:** Flat silver-plated copper strip
- Outer Braid:** PC (Round Silver-Plated Copper Braid)
- Dielectric:** Low density microporous PTFE (Polytetrafluoroethylene)
- Jacket:** FEP (Fluorinated Ethylene Propylene)
- Cable Outer Diameter:** 0.205" (5.21mm)
- Connectors:** SST, corrosion-resistant 303 stainless steel per ASTM-A582 (Passivated finish per SAE-AMS-2700)
- Center Pin:** GPBC (Gold-Plated Beryllium Copper)
- Jacket Color:** Grey
- Operating Temperature:** -40°C to +85°C

**Minimum Bend Radius:** 1.1"


*Custom Lengths Available*

- Connector Corrosion (salt spray):** MIL-STD-202, method 101, test cond. B 5% salt solution.
- Connector Durability:** 500 connections Minimum

**Electrical Specifications:**

- Impedance:** 50 Ohms
- Frequency:** Up to 26.5 GHz
- Insertion Loss:** <0.5 dB/ft at 26.5 GHz
- VSWR:** <1.35 to 26.5 GHz
- Max Operating Voltage:** 500V RMS
- Nominal Capacitance:** 27.0 pF/ft
- Velocity of Propagation:** 76%
- Shield Effectiveness:** Greater than 90 dB
- Attenuation (dB/ft):** 0.05 Max at 500 MHz  
 0.11 Max at 2 GHz  
 0.30 Max at 12 GHz  
 0.38 Max at 18 GHz  
 0.50 Max at 26.5 GHz

\*connector loss not included

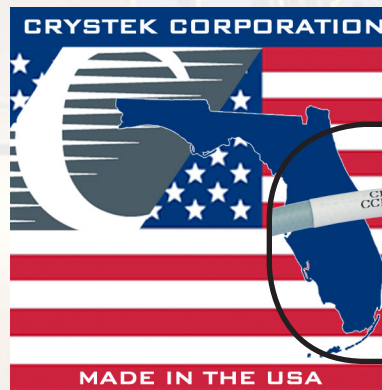

Electrical Test Data Supplied With Each Cable Assembly

**2.92mm(K) / 2.92mm(K) [Straight/Straight]**

| Part Number         | Description  | Length |
|---------------------|--|--------|
| CCK26.5-MM-190-30   | 26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight | 30"    |
| CCK26.5-MM-190-36   | 26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight | 36"    |
| CCK26.5-MM-190-39.4 | 26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight | 39.4"  |
| CCK26.5-MM-190-48   | 26.5 GHz Low Loss Coax Cable, 2.92mm(K) Male/Male, Straight/Straight | 48"    |

**SMA / SMA [Straight/Straight]**

| Part Number           | Description  | Length |
|-----------------------|--|--------|
| CCSMA26.5-MM-190-30   | 26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight | 30"    |
| CCSMA26.5-MM-190-36   | 26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight | 36"    |
| CCSMA26.5-MM-190-39.4 | 26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight | 39.4"  |
| CCSMA26.5-MM-190-48   | 26.5 GHz Low Loss Coax Cable, SMA Male/Male, Straight/Straight | 48"    |





12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
 PHONE: 239-561-3311 • 800-237-3061  
 FAX: 239-561-1025 • WWW.CRYSTEK.COM

Rev.: C  
 Date: 04-07-14



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
COAX CABLE ASSEMBLIES  
2.92mm(K) AND SMA  
STAINLESS STEEL  
CONNECTORS**

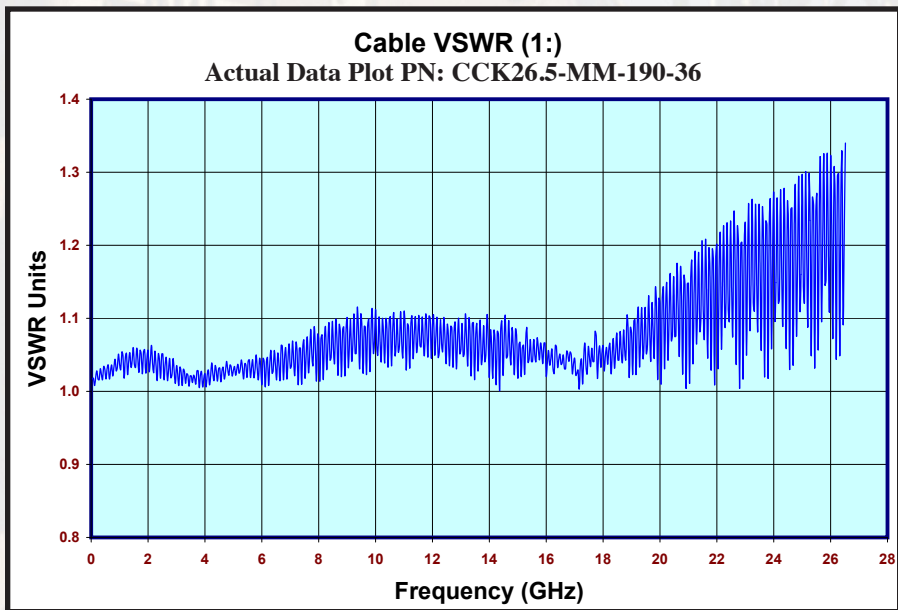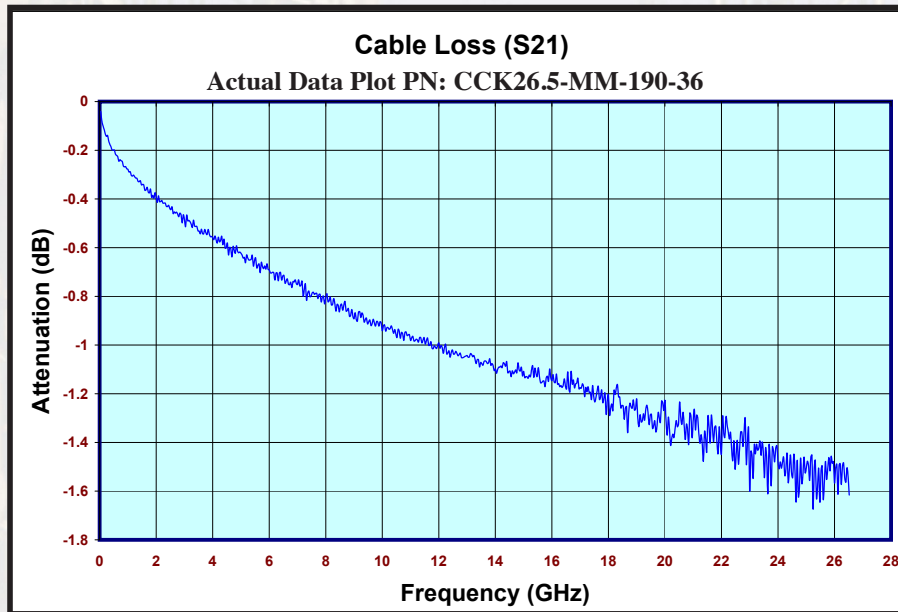



**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14



**CRYSTEK**  
**MICROWAVE**  
A DIVISION OF CRYSTEK CORPORATION

**26.5 GHZ LOW LOSS RF  
COAX CABLE ASSEMBLIES  
2.92mm(K) AND SMA  
STAINLESS STEEL  
CONNECTORS**

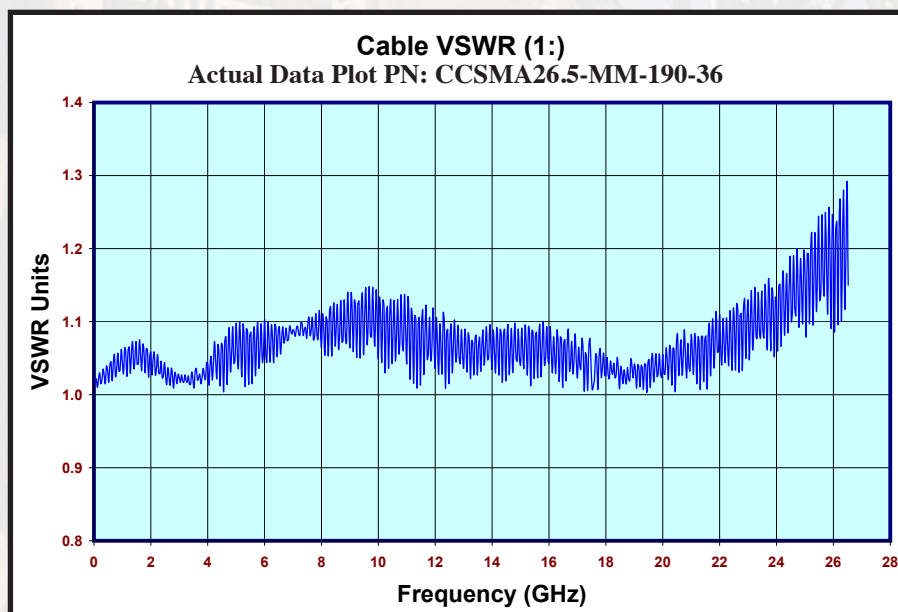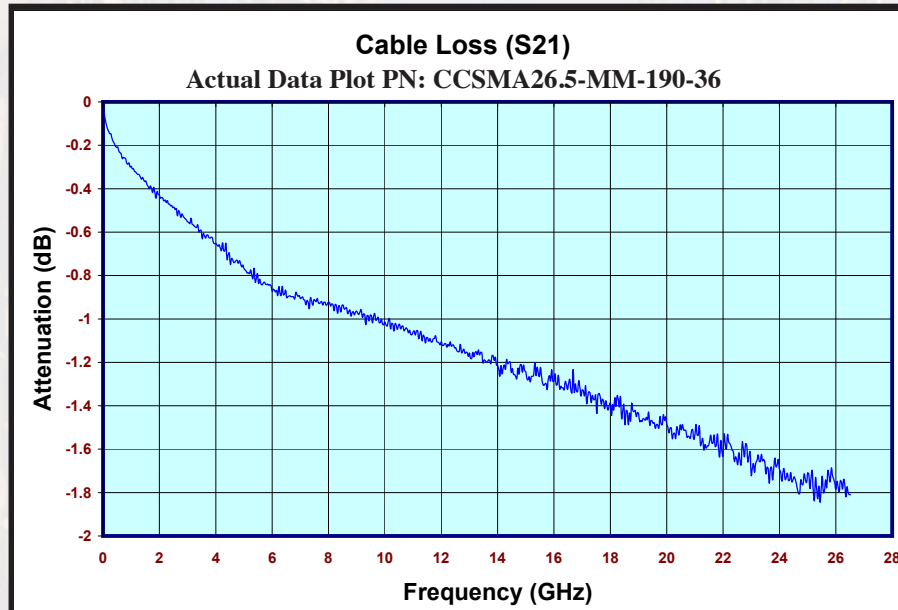

**CRYSTEK**  
CORPORATION

12730 COMMONWEALTH DRIVE • FORT MYERS, FL 33913  
PHONE: 239-561-3311 • 800-237-3061 Rev.: C  
FAX: 239-561-1025 • WWW.CRYSTEK.COM Date: 04-07-14

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [RF Cable Assemblies](#) category:*

*Click to view products by [Crystek](#) manufacturer:*

Other Similar products are found below :

[573/2](#) [73-6311-6](#) [73-6353-3](#) [73-6364-6](#) [MDB1-9SH001](#) [MDM-15PH003L-K139](#) [MDM-21PH003L-K139](#) [MIQ6-7SH076](#) [R288940005](#)  
[RMTB1-6PHY0102](#) [145111-05-12.00](#) [2192](#) [CA-628485-A43](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P203C24P2-006](#)  
[24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-](#)  
[003](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [RMTB1-15PHY0102](#) [RMTB1-](#)  
[8PHY0102](#) [4814-BB-24](#) [500-181-R-ACC](#) [5260-72](#) [314-120](#) [JR4N1-CL1-6F](#) [JR4R3-CL1-4F](#) [JT2N1-CL1-1F](#) [JT2T1-CL1-6F](#) [4814-K-48](#)  
[RN-UFL-SMA6](#) [100E151JW3600X](#) [CCNTN2-MM-LL335-26](#) [73-6310-50](#) [73-6351-25](#) [73-6353-25](#) [73-6361-25](#)