

Drum Core Surface Mount Unshielded Power Inductors

◆ Features

1. Excellent solderability and high heat resistance.
2. Excellent terminal strength construction.
3. Packed in embossed carrier tape and can be used by automatic mounting machine.




◆ Applications

Power supply for VCR,OA equipment ,LCD television set notebook, DC to DC converters, DC to AC inverters etc.



◆ Shape & Dimensions

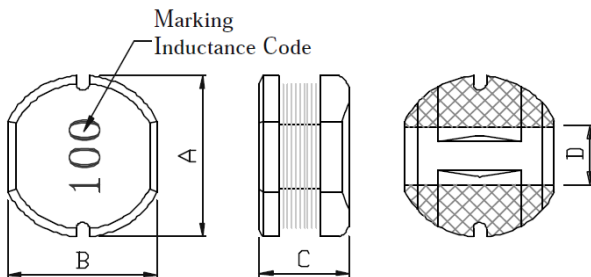

◆ Lead Free Part Numbering

CMLF 0504 - 100 M T T


(1) (2) (3) (4) (5) (6)

- (1) Series Type
- (2) Dimension: A X C
- (3) Inductance: 2R2=2.2 μ H ;
100=10 μ H; 101=100 μ H
- (4) Inductance Tolerance: K= \pm 10%, M= \pm 20%
- (5) Company Code
- (6) Packaging : packed in embossed carrier tape

Series	A (mm)	B (mm)	C (mm)	D (mm)
CMLF0504	5.8 \pm 0.3	5.2 \pm 0.3	4.5 \pm 0.3	1.5 Typ.

◆ Material

Item	Material
a. Core	Ferrite DR Core
b. Wire	Enamelled Copper wire
c. Terminal	Ag+Sn+SnPb

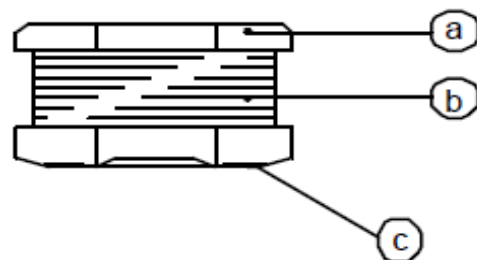

◆ Specification

Part Number	Inductance (μH)	DCR (Ω) max.	IDC (A) max.
CMLF0504 Series:			
CMLF0504-1R0MTT	1.00±20%	0.015	6.10
CMLF0504-1R2MTT	1.20±20%	0.020	5.70
CMLF0504-1R5MTT	1.50±20%	0.025	5.10
CMLF0504-1R8MTT	1.80±20%	0.030	4.90
CMLF0504-2R2MTT	2.20±20%	0.035	4.80
CMLF0504-3R3MTT	3.30±20%	0.045	4.20
CMLF0504-4R7MTT	4.70±20%	0.060	3.30
CMLF0504-5R6MTT	5.60±20%	0.070	3.10
CMLF0504-6R8MTT	6.80±20%	0.080	3.00
CMLF0504-8R2MTT	8.20±20%	0.090	2.70
CMLF0504-100KTT	10.0±10%	0.100	2.50
CMLF0504-120KTT	12.0±10%	0.120	2.30
CMLF0504-150KTT	15.0±10%	0.140	2.20
CMLF0504-180KTT	18.0±10%	0.150	1.83
CMLF0504-220KTT	22.0±10%	0.180	1.40
CMLF0504-270KTT	27.0±10%	0.200	1.37
CMLF0504-330KTT	33.0±10%	0.230	1.28
CMLF0504-390KTT	39.0±10%	0.320	0.80
CMLF0504-470KTT	47.0±10%	0.370	0.72
CMLF0504-560KTT	56.0±10%	0.420	0.68
CMLF0504-680KTT	68.0±10%	0.460	0.61
CMLF0504-820KTT	82.0±10%	0.600	0.58
CMLF0504-101KTT	100.0±10%	0.700	0.52
CMLF0504-121KTT	120.0±10%	0.930	0.48
CMLF0504-151KTT	150.0±10%	1.100	0.40
CMLF0504-181KTT	180.0±10%	1.380	0.38
CMLF0504-221KTT	220.0±10%	1.570	0.35
CMLF0504-271KTT	270.0±10%	1.650	0.32
CMLF0504-331KTT	330.0±10%	1.700	0.28
CMLF0504-391KTT	390.0±10%	1.800	0.26
CMLF0504-471KTT	470.0±10%	2.300	0.23
CMLF0504-561KTT	560.0±10%	2.500	0.20
CMLF0504-681KTT	680.0±10%	3.000	0.19
CMLF0504-821KTT	820.0±10%	4.500	0.16
CMLF0504-102KTT	1000.0±10%	4.800	0.14

◆ **Note**

- (1) Inductance is measured by LCR-meter 4284A/4286A (HP) or equivalent.
- (2) Inductance test condition: CMLF0504: 1.0 μ H~8.2H:7.96MTTHz/0.5V,
10.0 μ H~82.0 μ H:2.52MTTHz/0.5V, More than 100.0 μ H at 1.0KTTHz/1.0V.
- (3) DC Resistance is measured by HP4338B Milliohms Meter or equivalent.
- (4) Rated current is measured by LCR-meter 3260B (WK) & DC Bias 3265B(WK) at 1.0KTTHz/1.0V.
- (5) Maximum allowable DC current is that which causes a 10% inductance reduction from the initial value, or coil temperature to rise by 40°C, whichever is smaller. (Reference ambient temperature 20°C).
- (6) Operating temperature -55°C ~ +125°C.
- (7) All test data is referenced to 25°C ambient.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [Cybermax](#) manufacturer:

Other Similar products are found below :

[MLZ1608M6R8WTD25](#) [MLZ1608N6R8LT000](#) [MLZ1608N3R3LTD25](#) [MLZ1608N3R3LT000](#) [MLZ1608N150LT000](#)

[MLZ1608M150WTD25](#) [MLZ1608M3R3WTD25](#) [MLZ1608M3R3WT000](#) [MLZ1608M150WT000](#) [MLZ1608A1R5WT000](#)

[MLZ1608N1R5LT000](#) [B82432C1333K000](#) [PCMB053T-1R0MS](#) [PCMB053T-1R5MS](#) [PCMB104T-1R5MS](#) [CR32NP-100KC](#) [CR32NP-](#)

[151KC](#) [CR32NP-180KC](#) [CR32NP-181KC](#) [CR32NP-1R5MC](#) [CR32NP-390KC](#) [CR32NP-3R9MC](#) [CR32NP-680KC](#) [CR32NP-820KC](#)

[CR32NP-8R2MC](#) [CR43NP-390KC](#) [CR43NP-560KC](#) [CR43NP-680KC](#) [CR54NP-181KC](#) [CR54NP-470LC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#)

[MGDQ4-00004-P](#) [MGDU1-00016-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#) [PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-](#)

[62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [PM06-2N7](#) [PM06-39NJ](#) [HC2LP-R47-R](#) [HC2-R47-R](#) [HC3-2R2-R](#) [HC8-1R2-R](#)