

## Plug and Socket Terminal Blocks

<b>Specification:-</b>	
Housing:	Polyamide 6/6
Insert :	Brass, nickel plated
Screw :	Plated-steel
Spring :	Stainless Steel

<b>Features &amp; Benefits:-</b>	
High Foot meets lighting application requirements & allows moisture run-off when used in enclosure.	
Solid brass pin for better conductivity.	
Stainless steel spring has better memory than split pin allowing greater number of insertions.	
UL & VDE approval	

Hylec-APL Part Number                      HYPS-01712

T06

Voltage (V)                                      250\*

\* For UL-standard, max 300V

Ampere (A)                                      6  
VDE / IEC-rated

Max Wiring Capacity (mm<sup>2</sup>)                2.5

Ambient Temperature : T105°C


Dimensions (mm)                              T06

Height    17

Length    115


Width    23

Spacing     9.6

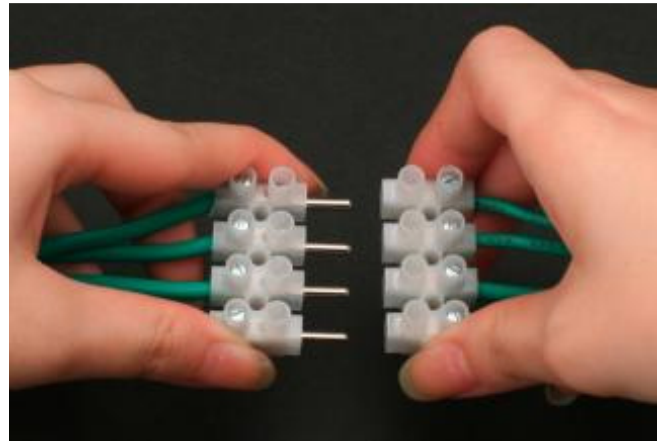

**Tel :-**  
**01933 234400**

**Fax :-**  
**01933 234411**

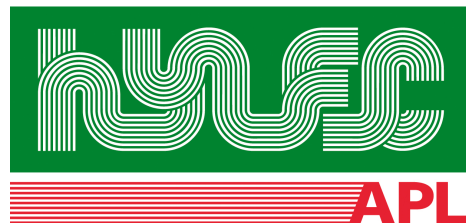

Web :- [www.hylec-apl.com](http://www.hylec-apl.com)

Email :- [sales@hylec-apl.com](mailto:sales@hylec-apl.com)

**Making The Right Connections**

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [hylec manufacturer](#):*

Other Similar products are found below :

[LN167001](#) [50.625 PA/3X7](#) [50.620 PA/R](#) [DESTB-1003](#) [THB.406.A1G](#) [THB.387.A4A.R](#) [K150-1032-00](#) [GHG9601955R0004](#) [K151-1032-00](#)  
[HYKS-07612PP](#) [THB.382.A1A-KIT](#) [THB.390.A1AKIT](#) [THK.404.X2A00-F](#) [50.216 ES](#) [50.616M/EMVDL-F](#) [50.625 ES](#) [THB.405.A2A](#)  
[PA244SKIT](#) [50.220 M-F](#) [HY435/12 FV](#) [THB110A6B-F](#) [50.216 M-F](#) [5625////1121](#) [THB.380.3ASSY](#) [THB.405.A2G](#) [THA.209.A1A](#)  
[THB.387.B5A](#) [DESTB-1002](#) [THB.384.A1A](#) [K257-1012-00](#) [6000302CC](#) [TTK25BK-SD-F](#) [TTK20GY-SD-F](#) [DESTB-0403](#) [THB.384.B1A](#)  
[50.625 PA/RSW](#) [HY508/3 V/3F](#) [5665/221](#) [THB.387.A3A](#) [THB.387.D4A](#) [THB.387.B4A](#) [THR.405.S5A](#) [THB.381.M2A](#) [THB.387.A5A](#)  
[THB.387.C5A](#) [THB.387.D3A](#) [50.625 M/EMVDL-F](#) [THK.200.3T](#) [THB.381.A2A](#) [K160-1040-00](#)