

Instruction/ Installation Sheet


MCM 50-8817 and 50-8819 Recessed Low Voltage Cable Plates with Power.

Use this new patent pending **Recessed Low Voltage Cable Plates with Power** to install low voltage cables behind flat panel monitors, amplifiers or other audio and video devices.

The **Recessed Low Voltage Cable Plates with Power** can be installed upright or upside down. Please read all instructions before installing this product.

To install the **Recessed Low Voltage Cable Plates with Power** with a flat panel TV bracket

For retrofit work, determine the location of the flat panel TV mounting bracket. Using the template supplied (see back of instruction sheet), trace the opening needed. Using a drywall knife cut a hole in the drywall the size of the template. Insert a single gang retrofit workbox (like one shown in picture). Securely fasten the workbox to the wall. Switch the appropriate circuit breaker OFF or remove fuse(s) before wiring. Run a source of power to this workbox. Connect hot line (black) wire to brass colored terminal or screw and neutral (white) wire to silver colored terminal or screw. Be sure to connect grounding (green) or bare grounding wire to green colored terminal screw. For shock protection, this receptacle must be properly grounded. Caution – use copper wire only with this receptacle.

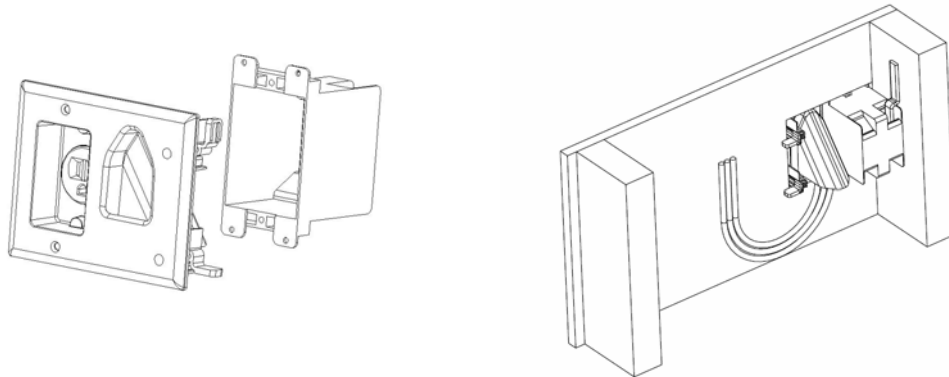

Once you have wired the receptacle, begin by inserting receptacle portion of the plate into the retrofit work box. Once the entire recessed plate is flush to the wall, using the two white screws supplied, screw the receptacle portion of the plate to the work box.

INSTRUCTIONS ARE CONTINUED ON THE BACK SIDE OF THIS PAGE

Next, screw down the screws with wings. These wings will fasten tightly against the back of the drywall. Switch appropriate circuit breaker ON or insert fuse(s). Plug all necessary video and audio cables. Install your flat panel TV mounting bracket per the flat panel TV bracket manufacturers instructions. Make sure to read all instructions.

New Construction - for new construction installations simply use a new nail on box and follow all other instructions.

Warning –This product shall be installed and used only as indicated in the included product instruction sheet. Instruction sheets are available at www.mcminone.com


CAUTION

- For shock protection, this device must be properly grounded
- Use copper wire only with this device

IMPORTANT INSTRUCTIONS

- Read and understand all instructions
- Follow all warning and instructions marked on the product
- Do not use this product near water, for example near bath tub, wash bowl, kitchen sink, or laundry tub, in wet basement, or near a swimming pool.
- SAVE THESE INSTRUCTIONS

ONLY LICENSED PROFESSIONALS SHOULD INSTALL THIS PRODUCT

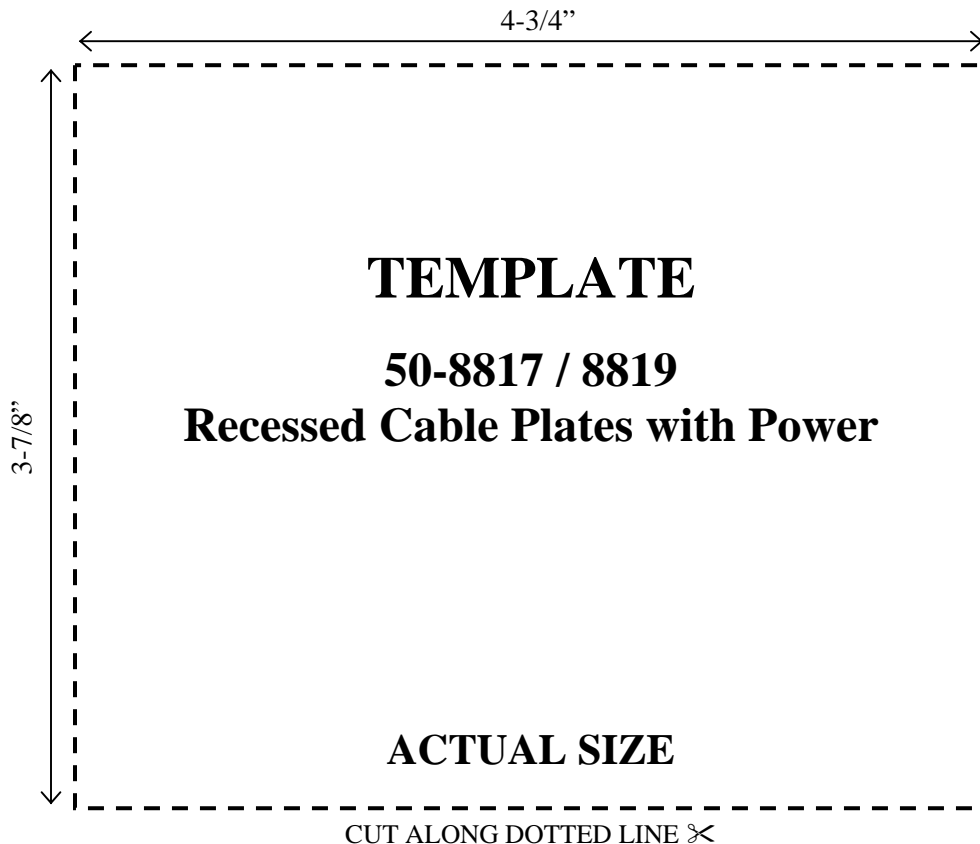

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DATACOMM ELECTRONICS](#) manufacturer:

Other Similar products are found below :

[48-0204-WH](#) [45-0001-BR](#) [45-0016-LA](#) [20-3425-BL](#) [20-3423-WH](#) [45-0017-IV](#) [45-0002-WH](#) [45-0001-LA](#) [20-3102-WH](#) [60-0021-S](#) [45-0017-WH](#) [60-0022-S](#)